



Part Number: 656051F0000

	Part Number	Thermal Resistance °C/W at 3in length	Width in	Height in	Surface Area in²/in	Weight lb/ft
	65605	0.71	6.96	2.79	98.3	9.00




Thermal Curves based on 3.000 in length

## **Natural Convection**

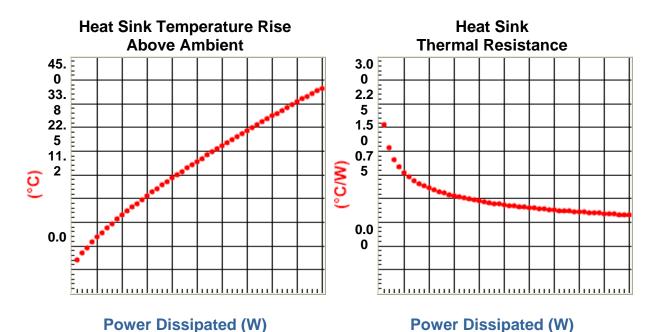

## **Forced Convection**

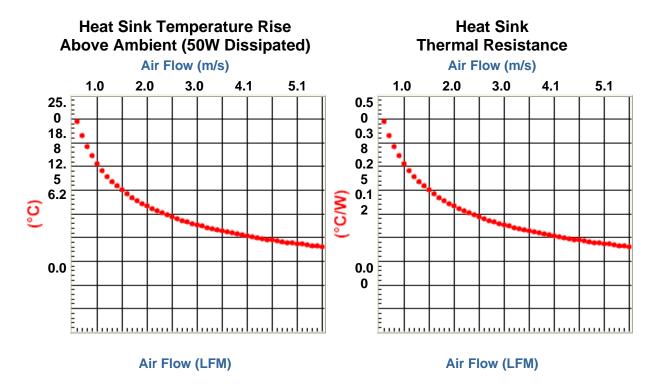

## **Building a Part Number**

Full Bar Length = 6.00ft

Base Part #	Bar Length	Finish	Length (use zeros for full or half bars)	
5 digit base part #	1 Full (normally 8-ft)	<u>F</u> Unfinished	00000	
	2 Half (small cut fee)	<u>F</u> Unfinished	00000	
	3 Custom (cut to specified length)	B Black Anodized C Gold Chromate U Unfinished* V AavSHIELD <sup>3</sup>	indicate length in inches to three decimal places; If the part is less than 10 inches, the first of these 5 digits (digit 7 of the 12 digit series) would be a zero (0).	

65605 1 F 00000

## **Examples:**

If you wanted to simply order extrusion # 65605 in standard bar form, the part number would be:656051F00000. The unit price would be sold by the foot.

If you wanted extrusion 65605 cut to a length of 6.500" and black anodized, the part number would be:656053B06500. The unit price would be by the piece.

If you wanted extrusion 65605 cut to a length of 14.725" and a wash finish, the part number would be:656053U14725. The unit price would be by the piece.

\*For unfinished extrusions with cut lengths other than half bar, the finish designation is a U.

Standard Aavid Thermalloy parts require all 12 positions to be complete.