Extrusion Profiles Page 1 of 4




Back to search results

71350

This part is in stock!						
Inventory Snapshot:	10 feet*					
*Material in stock maybe allocated to other orders and is subject to prior sales						
OEM Pricing*						
8 feet: \$93.75 per foot	32 feet: \$23.44 per foot	56 feet: \$18.86 per foot				
*For larger quanities, plea	se contact our sales departmen	nt				

Part Number	Thermal Resistance ℃/W at 3in length*	Width in	Height in	Surface Area in ² /in	Weight Ib/ft	Part Class
71350	1.19	5.86	2.00	58.8	3.00	В


^{*}Based on a 75°C rise in natural convection

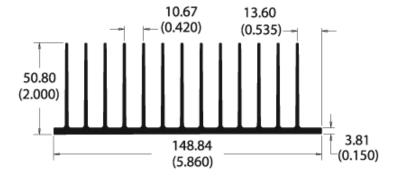

Thermal Curves based on 3.000 in length



Natural Convection

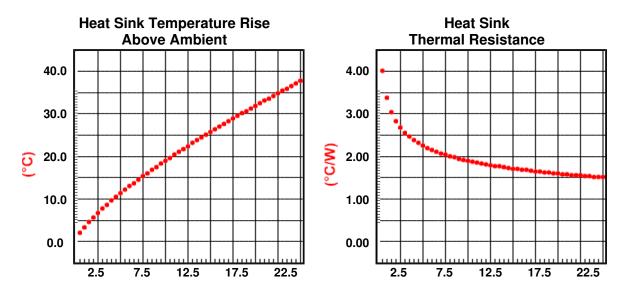


Extrusion Profiles Page 2 of 4

Power Dissipated (W)

Power Dissipated (W)

Extrusion Profiles Page 3 of 4

Forced Convection

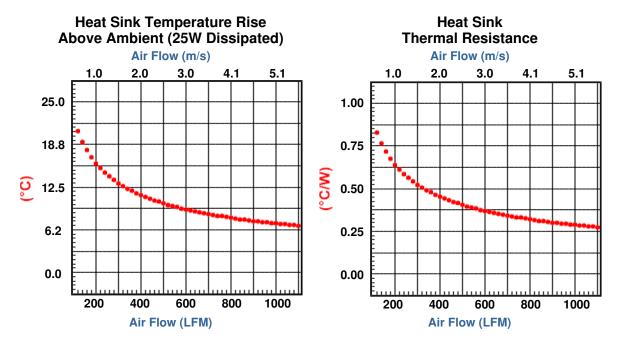

Building a Part Number

3

Full Bar Length = 8.00ft

Base Part #	Bar Length	Finish	Length (use zeros for full or half bars)	RoHS	
5 digit base part #	1 Full (normally 8-ft)	<u>F</u> Unfinished	00000	Compliant NO "G"	
	2 Half (small cut fee)	<u>F</u> Unfinished	00000	required	
	3 Custom (cut to specified length)	<u>B</u> Black Anodized <u>U</u> Unfinished* <u>V</u> AavSHIELD ³	length in inches to three decimal places**	Compliant Add "G"	
		C Gold Chromate		Not Compliant	

^{*}For unfinished extrusions with cut lengths other than half bar, the finish designation is a U.

U

Examples:

71350

If you wanted to simply order extrusion # 71350 in standard bar form, the part number would be: 713501F00000. The unit price would be sold by the foot.

If you wanted extrusion 71350 cut to a length of 6.500" and black anodized, the part number would be: 713503B06500G. The unit price would be by the piece.

06500

G

If you wanted extrusion 71350 cut to a length of 14.725" and a wash finish, the part number would be: 713503U14725G. The unit price would be by the piece.

If you wanted extrusion 71350 cut to a length of 14.725" and Gold Chromate finish, the part number would be: 713503C14725. The unit price would be by the piece.

Standard Aavid Thermalloy parts require all 12-13 positions to be complete.

^{**}If the part is less than 10 inches, the first of these 5 digits (digit 7 of the 13 digit series) would be a zero (0).

Extrusion Profiles Page 4 of 4

Non-Standard Extrusions

Aavid Thermalloy has over 10,000 extrusion profile designs on file, most with the extrusion die already available. These parts have minimum order requirements and longer lead times, but may be cost effective compared to a new design.

Customizing & Advanced Capabilities

We offer several options for those applications which require a more unique solution. Challenge us with your thermal requirements - we can design custom solutions.

©2012 Aavid Thermalloy, LLC