
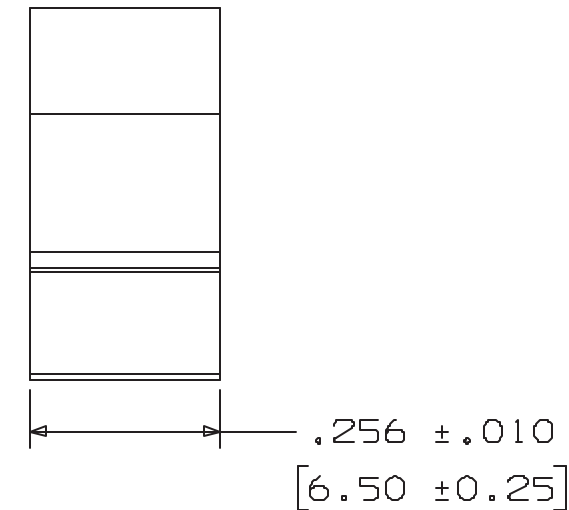
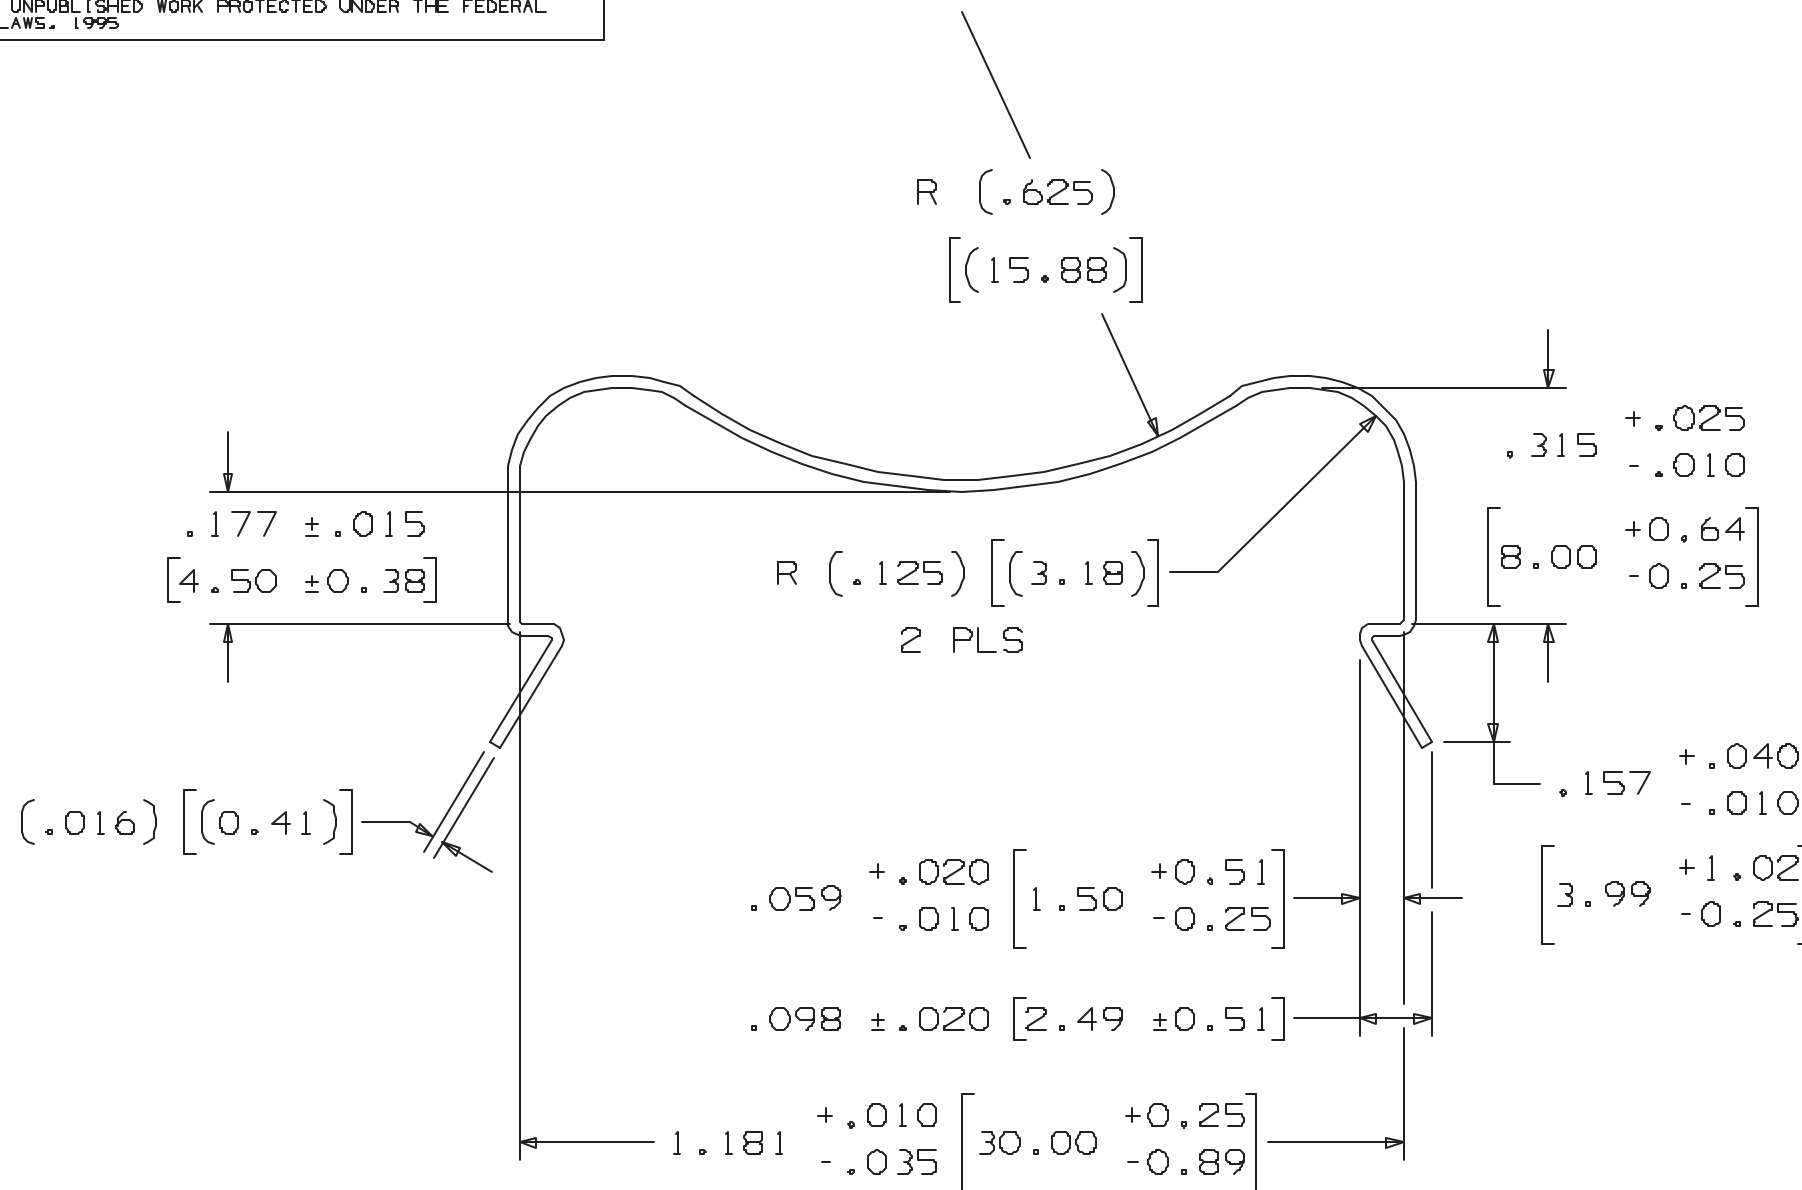


THIS DRAWING AND THE SPECIFICATIONS CONTAINED HEREIN ARE CONFIDENTIAL AND PROPRIETARY. THEY ARE THE PROPERTY OF AVID THERMAL TECHNOLOGIES INC. AND SHALL NOT BE REPRODUCED OR COPIED OR USED IN WHOLE OR IN PART AS THE BASIS FOR THE MANUFACTURE OR SALE OF ITEMS WITHOUT WRITTEN PERMISSION. THIS IS AN UNPUBLISHED WORK PROTECTED UNDER THE FEDERAL COPYRIGHT LAWS. 1995




ROHS COMPLIANT
PER AVID SPEC: ROHS - 9000

NOTES:

1. UNLESS OTHERWISE NOTED, USE MINIMUM BEND RADIUS (.020) [(1.51)].
2. MATERIAL: 1050 ANNEALED SPRING STEEL .016 [.41] THICK.
3. FINISH: ZINC/CLEAR .0001 MINIMUM THICKNESS (TRIVALENT) AND BAKE FOR 3.5 HOURS AT 350/370 DEGREES F FOR HYDROGEN EMBRITTLEMENT RELIEF.
4. PART IS DESIGNED FOR USE WITH METAL THICKNESS OF .05 [.27] TO .125 [3.12].

FINISH	SEE NOTE 3
U/O	
MAT'L	SEE NOTE 2
TOLERANCE UNLESS NOTED	
.XX	= ±.015 [±.38]
.XXX	= ±.010 [±.25]
ANGULAR	± 3°

A	7/18/06	RELEASE PER ECN# 018980	MIKEL
REV.	DATE	DESCRIPTION	CHK'D
		AAVID THERMALLOY 80 COMMERCIAL ST. CONCORD, N.H. 03301	
DRAWING NO.		043660	
STANDARD DESCRIPTION THM,16743-1 REV E-G			
DATE	DRAWN	ENGR.	APP'D
04/25/03	P.C.		
REF: CLP-101G			SHEET