


Supply Module 24 V DC, 1.0 A Ex i

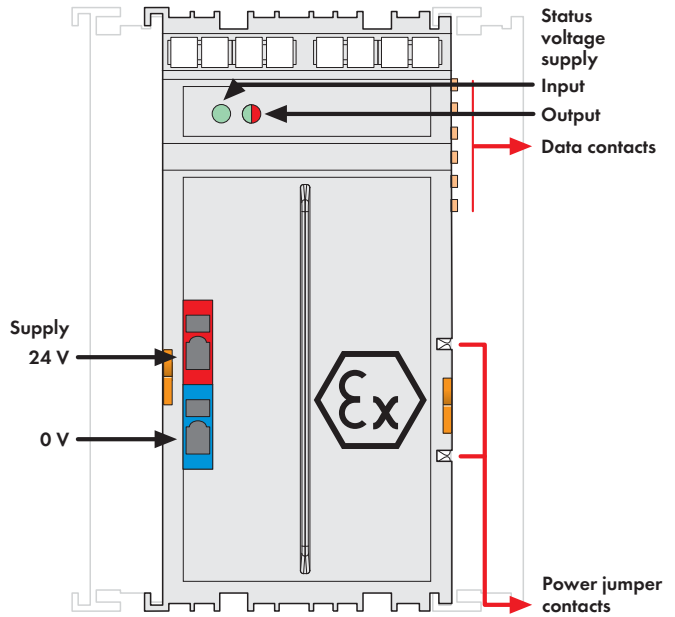

Delivered without miniature WSB markers

This supply module provides power to all intrinsically safe 750 Series Ex i modules. It also monitors power supply to the downstream Ex i segment and separates the intrinsically safe from the non-intrinsically safe section of the WAGO-I/O-SYSTEM 750. Input and output sides are electrically isolated from each other.

The maximum current available from the supply module is 1.0A. When setting up the Ex-i segment, it must be ensured that this total current is not exceeded. In the event of a short circuit or overload, electronic monitoring automatically switches off the output voltage. After eliminating the fault, the output voltage is reactivated within approx. 10 sec.

Notice:

If, due to load conditions, more than one supply module is required per station, four separation modules (750-616) must be placed between the intrinsically safe sections.


LED displays:

- LED green (input voltage)
- LED green/red (output voltage available/not available)

Note:

General information (e.g., installation regulations) on explosion protection is available in the WAGO-I/O-SYSTEM 750 manuals!

Description	Item No.	Pack. Unit
24V DC 1.0A power supply Ex i	750-606	1
24V DC 1.0A power supply Ex i (without diagnostics)	750-625/000-001	1

Accessories	Item No.	Pack. Unit
Miniature WSB Quick marking system		
 plain	248-501	5
with marking	see Section 11	

Technical Data	
Current consumption, system voltage typ. (5 VDC)	7.5 mA
Max. nominal output voltage via power jumper contacts	24 VDC
Current via power jumper contacts (max.)	1 ADC
Input voltage	24 VDC (-25% ... +30%)
Power consumption P _{max.}	29 W
Power loss P _v	< 5 W
Fuse	electronic
Bit width	750-606: 2 bits (input voltage failure, fuse triggered)

