


Single Board Computer iW-RainboW-G15S i.MX6 Pico-ITX SBC



iWave's new i.MX6 Quad/Dual/Dual Lite/Solo based Pico-ITX SBC integrates all standard interfaces into a single board with ultra compact yet highly integrated platform that can be utilized across multiple embedded PC, system and industrial designs. It has got all the necessary functions that the embedded world demands on a single board. It also provides an expansion header through which interfaces can be used according to their applications. Measuring just 100mm x 72mm, the Pico-ITX is currently the smallest complete ARM Cortex A9 main board in the industry, smaller than all existing ATX, BTX and ITX form factors.

APPLICATIONS: Intelligent Industrial Control Systems, Industrial Human-Machine interface, Ultra Portable Devices, Home Energy Management Systems, Portable Medical Devices

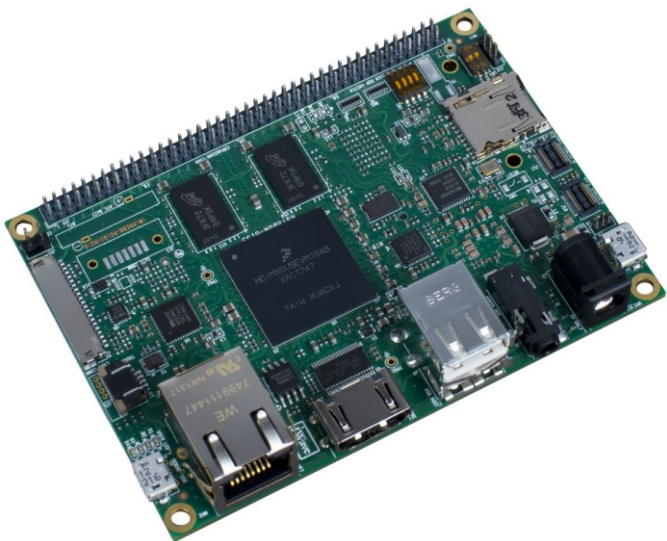

iW-RainboW-G15S HIGHLIGHTS

ARM Cortex A9 @ 1GHz/800MHz
Quad/Dual/Dual Lite/Solo core

100mmx72mm Pico-ITX form-factor
Single Board Computer

HD 1080p encode and decode

3D video playback in high definition

Technical and quick customization
support


5+ years, long term support

SPECIFICATIONS

CPU:	Debug & Status Indication Support:
i.MX6 Q/D/DL/S @1GHz/800MHz ARM-Cortex-A9	Micro USB Debug Port
PMIC:	JTAG Header
Freescale MMPF0100	4 Pos User Dip Switch & Status LEDs
RAM:	Expansion Header-84 Pin:
1GB DDR3 for Q/D/DL (Expandable up to 4GB*)	MIPI DSI
512MB DDR3 for Solo (Expandable up to 2GB*)	SPI Interface-1No
Storage:	CSI0 Camera interface
On-board Micro SD Slot	CAN2 Interface
Standard SD/SDIO Slot	UART- 3 Nos
SPI Flash 16Mbit	I2C- 3 Nos
4GB eMMC Flash	GPIOs
Optional SATA 7 Pin Connector*	LVDS1 Interface
Communication Interfaces:	Optional MLB interface*
10/100/1000 Mbps Ethernet	Miscellaneous:
Half mini PCIe card Connector	RTC Controller*
Dual USB Host Connector	Operating Temperature:
Micro USB OTG Connector	-20°C to +85°C
CAN Transceiver - 1 Port	Power Input:
Audio & Video Interfaces:	5V, 2A
AC97 Audio Codec with Audio Out Jack & Audio In Header	Form Factor:
HDMI Port	Pico-ITX (100mmx72mm)
LVDS Connector with Backlight Support [LVDS0]	Operating Systems:
4 Wire Resistive Touch Controller	Linux 3.0.35
8 Bit CMOS Camera Connector [CSI1]	Android 4.3 Jelly Bean
2 Lanes MIPI Camera Connector	WEC7

*Optional features are not supported by default

i.MX6 PICO-ITX SBC BLOCK DIAGRAM

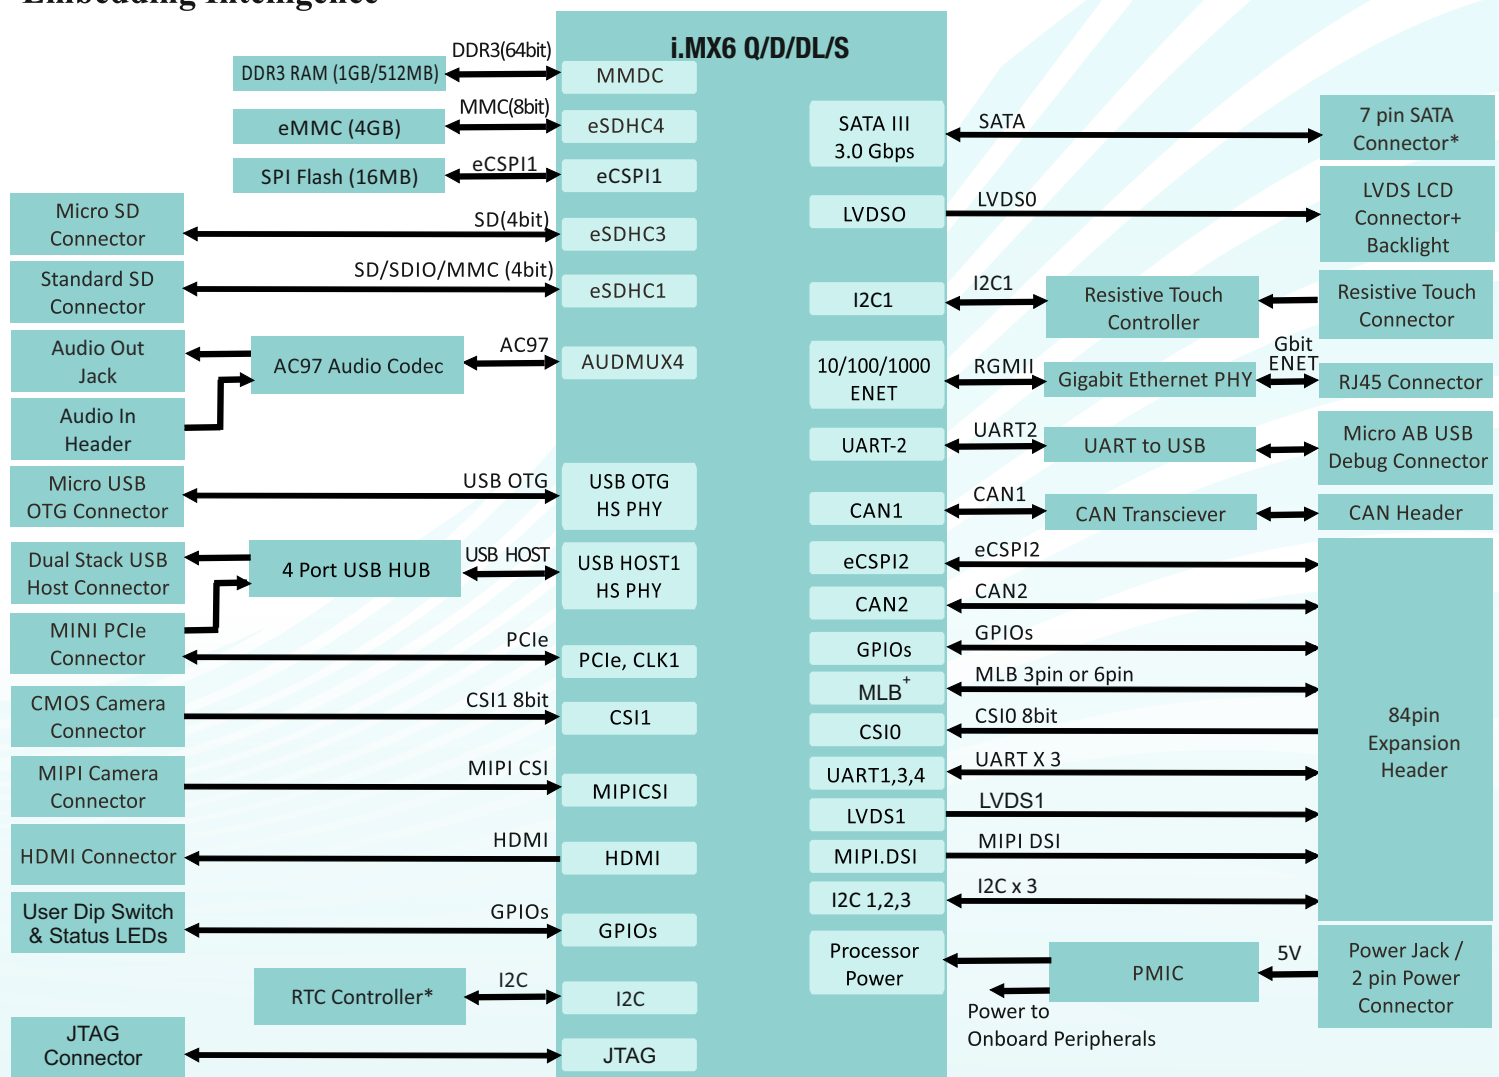

OS SUPPORT

Linux 3.0.35
Android 4.3 JB
WEC7

DELIVERABLES

i.MX6 Pico-ITX SBC
Board Support Packages
5V @2A Power Adapter
User Manual

OPTIONAL ADD ON MODULES

Advanced Learning Platform

CUSTOM DEVELOPMENT

BSP Development/OS Porting
Custom Application/GUI Development
Design Review and Support

iWave Systems Technologies, established in 1999, focuses on Product Engineering Services involving Embedded Hardware, Software & FPGA. The company designs and develops cutting edge products and solutions. iWave has been an innovator in the development of highly integrated, high performance, low power and low cost System On Modules and Development Platforms. iWave's expertise has brought out multiple SOMs based on ARM, Freescale, Intel Atom, Marvell and TI Processors.

iWave Systems has won the confidence of its customers over the years by being a reliable partner in developing innovative products. Our engineers combine outstanding System design experience to deliver Quality Solutions. iWave specializes across Industrial, Automotive and Medical domains. We support our customers by being time efficient, which in turn helps our customers accelerate time to market their products. iWave is a Windows embedded Silver partner and a winner of the Partner Excellence Award.

Note: iWave reserves the right to change these specifications without notice as part of iWave's continuous effort to meet the best of breed specification. The registered trademarks are proprietary of their respective owners.

*Optional items are not included in the standard deliverables

Ordering the i.MX6 Pico-ITX SBC

The board can be ordered online from the iWave Website
<http://www.iwavesystems.com/webforms>

iWave Systems Tech. Pvt. Ltd.,
7/B, 29th Main, BTM Layout 2nd Stage,
Bangalore-560076,
India.
Ph: +91-80-26683700, 26786245
Email: mktg@iwavesystems.com
www.iwavesystems.com

iWave Japan, Inc.
8F-B, Kannai Sumiyoshi Building,
3-29, Sumiyoshi-cho, Naka-ku,
Yokohama, Kanagawa, Japan.
Ph: +81-45-227-7626
Email: info@iwavejapan.co.jp
www.iwavejapan.co.jp