

APT-CV5-Vx-LN MODULES



Features

- > APT-CV5 controllers add advanced control features to standard constant voltage (CV) drivers
- > Integrated between the CV driver and LED modules, the DC modules are powered directly from the CV driver
- > APT-CV5 controllers provide up to 5 constant current outputs for powering LED channels of varying forward voltages
- > Operable for independent control over each output channel and/or control over overall intensity and calibrated channel mix
- > APT Programmer enables in-factory and in-field changes to control settings including CCT range, CCT mapping and Intensity mapping
- > Wired versions available with DMX512/RDM (VA)
- > Wireless versions available with Casambi BLE Mesh (VWC)
- > Wireless controller versions available with either embedded antenna (EA) or whip antenna (WA)

Ordering Information

Product Code	Description
APT-CV5-Vx-LN-<i>www</i>	Vx – Hardware version LN – Linear form factor www – Firmware code provided by Arkalumen
Hardware Version	Functionality
VA	DMX512/RDM
VWC	Wireless – Casambi BLE Mesh

System Architecture

Design Requirements
1. Ensure DC V_{IN} is greater than V_{OUT} of each channel (dictated by the LED forward voltage of the channel).
2. If optimized transition is desired, use transition calibration feature in the advanced tab of the APT Programmer
3. Minimize ΔV of each channel for optimal efficiency. ΔV_{MAX} is determined based on the channel current (I_{CH}). For $I_{CH} < 1.0A$, $\Delta V_{MAX} = 15V$, For $1.0A < I_{CH} < 2.0A$, $\Delta V_{MAX} = 9V$, For $2.0A < I_{CH} < 3.2A$, $\Delta V_{MAX} = 4.5V$
4. LED channels should be able to handle a minimum of 80mA ripple. 80mA ripple is seen with the following conditions, 1.2A/channel and 1.2V ΔV . Current ripple is dependent on ΔV of each channel.
5. APT controllers are designed to work with a wide range of drivers, but a fixture manufacturer must test the APT controller for driver compatibility and ensure proper system operation before installation.

Contact Arkalumen for technical support at support@arkalumen.com

Arkalumen Products may be covered by patents in the US and elsewhere.

www.arkalumen.com/patents

Mechanical Specifications

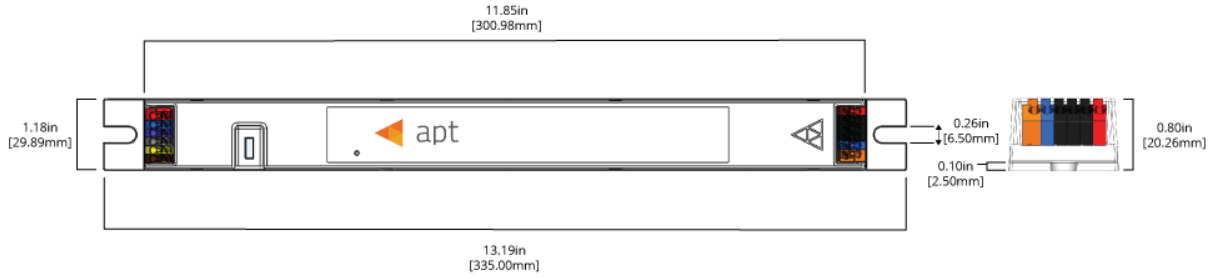


Figure 1 - APT-CV5-Vx Mechanical Drawing

Dimensions		Inches
Length		13.19
Width		1.18
Height		0.80

Encasement Specifications	
Material	Plastic
RTI Elec	130 C

APT-CV5-VA-LN MODULE (DMX512/RDM)

Electrical Specifications

Input

Port	Voltage		V	Current		mA	Power	
	Min	Max		Min	Max		Min	Max
DC IN +/-	10	60	V	87	4,100	mA	-	100 W
DMX Data+	-10	15	V	-0.8	1	mA	-	-
DMX Data-	-10	15	V	-0.8	1	mA	-	-

Output

Port	Voltage		V	Current		mA	Power	
	Min	Max		Min	Max		Min	Max
+	-	58	V	0	4,013	mA	-	100 W
CH1	-	58	V	0	3,200	mA	-	-
CH2	-	58	V	0	3,200	mA	-	-
CH3	-	58	V	0	3,200	mA	-	-
CH4	-	58	V	0	3,200	mA	-	-
CH5	-	58	V	0	3,200	mA	-	-

Wiring Diagram



Figure 2 - APT-CV5-VA DMX512/RDM Configuration

Wiring	AWG
Input, Output	16-22

INPUT, OUTPUT



7.5-8.5mm wire preparation

DMX Address Assignment

Enabled Features	Required DMX Channels
Independent Channel Control	One DMX address is required per available output channel
Calibrated CCT Control	Two additional DMX addresses are required if calibrated CCT mapping is enabled, one for controlling the CCT and one for controlling the overall light intensity

Schemes

Schemes for DMX [y]	# of DMX Channels	DMX Address Assignment							
		Base	+1	+2	+3	+4	+5	+6	
1	2	CCT	INT	-	-	-	-	-	
2	3	R	G	B	-	-	-	-	
3	4	R	G	B	W1	-	-	-	
4	5	R	G	B	W1	W2	-	-	
5	6	R	G	B	W1	CCT	INT	-	
6	7	R	G	B	W1	W2	CCT	INT	

LEGEND					
Red	R	White 1	W1	CCT Control	CCT
Green	G	White 2	W2	Intensity Control	INT
Blue	B				

1. The assigned DMX addresses are customizable. The above table is a list of the default schemes available.
2. Changing the DMX Address Assignment does not change the physical wiring of the controller to the LED module. Please refer to Figure 3 for RGBWW wiring application.

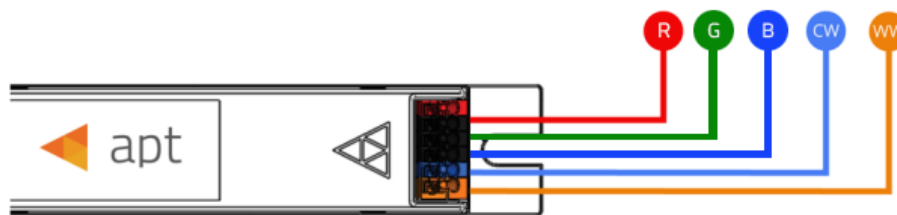


Figure 3 - Wiring APT-CV5-VA-LN to RGBWW LED Module

Operating Conditions

Temperature Limits	
Max Temperature, T _c	75°C
Min Ambient Temperature, T _a	-40°C

*Temperature Limits valid when electrical limits are respected and mounting surface is kept at 75°C or below



Fig. 4 - T_c is measured on metal sleeve of micro-USB programming port in location specified above

Ordering Information

Product Code	Description
APT-CV5-VA-LN-wwww	VA – DMX512/RDM hardware version LN – Linear form factor wwww – Firmware code provided by Arkalumen

Configuration Code	Description
DMXn-Ammm-tttt-1Cxxx-2Cxxx-3Cxxx-4Cxxx-5Cxxx	DMXn – DMX Address Assignment Scheme Ammm – Base DMX address tttt – Output control feature yCxxx – Channel-specific max current

Configuration Code Details

Code	Description	Option	Configuration Trait
DMXn	DMXn denotes DMX wired communication using DMX Address Assignment Scheme <i>n</i> .	DMXn	DMX Address Assignment Scheme <i>n</i> . See Schemes under DMX Address Assignment on page 4.
Ammm	mmm denotes the base address of the controller on a DMX bus.	A001	Lowest base address option
		A###	Base address specified between 1 and 512
		A512	Highest base address option
tttt	tttt denotes the output control features enabled on the controller.	0000	Calibrated CCT mapping disabled
		CALC	Calibrated CCT enabled. Calibrated CCT can be customized to output specific desired light metrics.
yCxxx	yCxxx denotes the maximum current for channel <i>y</i> as configured in the controller's firmware in 20mA increments.	1C###	Maximum current specified up to 3,200mA. e.g. -1C200-2C200-3C030-4C030-5C030 would specify 2000mA max current for channels 1 and 2, and 300mA for channels 3, 4 and 5.
		2C###	
		3C###	
		4C###	
		5C###	

APT-CV5-VWC-LN MODULE (WIRELESS)

Electrical Specifications

Input

Port	Voltage		V	Current		mA	Power		W
	Min	Max		Min	Max		Min	Max	
DC IN +/-	12	60		45	4,100		-	100	

Output

Port	Voltage		V	Current		mA	Power		W
	Min	Max		Min	Max		Min	Max	
+	-	58		0	4,055		-	100	
CH1	-	58		0	3,200		-	-	
CH2	-	58		0	3,200		-	-	
CH3	-	58		0	3,200		-	-	
CH4	-	58		0	3,200		-	-	
CH5	-	58		0	3,200		-	-	

Wireless Operating Conditions ¹	
Maximum Transmitter Power	+4dBm
Operating Frequencies	2.4GHz
Maximum Open-Air Range	270m

Contains modular transmitter with FCC ID: X8WBM832, IC (Industrial Canada) ID: 4100A-BM832

Wireless signal range of the controller will decrease if placed in a metal enclosure or placed near other wireless devices operating at similar frequencies, keep the VWx controller at least 20cm away from other VWx controllers or wireless devices. The end product with this module may subject to perform FCC part 15 unintentional emission test requirement and be properly authorized.

This device is intended for OEM integrator only.

If used with ANT020 antenna or integrated PCB trace antenna, device does not require routine evaluation or SAR testing.

Wiring Diagram

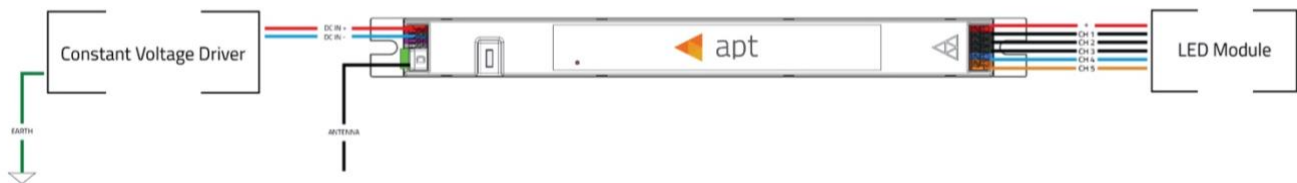


Figure 4 - APT-CV5-VWC Wireless Communication Configuration

Wiring	AWG
Input	20-26
Output	16-22
Antenna	ANT020*

*Integrated embedded PCB trace antenna option available on request, ANT020 antenna does not come with device by default, please include request for antenna if necessary



7.5-8.5mm wire preparation

Operating Conditions

Temperature Limits	
Max Temperature, Tc	75°C
Min Ambient Temperature, Ta	-40°C

*Temperature Limits valid when electrical limits are respected and mounting surface is kept at 75°C or below



Fig. 4 - Tc is measured on metal sleeve of micro-USB programming port in location specified above

Ordering Information

Product Code	Description
APT-CV5-VWC-LN-yA-wwww	VW – Wireless – Casambi BLE Mesh hardware version LN – Linear form factor yA – Antenna version (EA – embedded antenna, WA -whip antenna) wwww – Firmware code provided by Arkalumen

Configuration Code	Description
CBM-0000-tttt-1Cxxx-2Cxxx-3Cxxx-4Cxxx-5Cxxx	CBM – Casambi BLE Mesh wireless control protocol 0000 – No base address to be specified tttt – Output control feature yCxxx – Channel-specific max current

Configuration Code Details

Code	Description	Option	Configuration Trait
CBM	CBM denotes wireless communication.	CBM	Wireless via Casambi BLE Mesh
tttt	tttt denotes the output control features enabled on the controller.	0000	Calibrated CCT mapping disabled.
		CALC	Calibrated CCT enabled. Calibrated CCT can be customized to output specific desired light metrics.
yCxxx	yCxxx denotes the maximum current for channel y as configured in the controller's firmware in 20mA increments.	1C###	Maximum current specified up to 3,200mA. e.g. -1C200-2C200-3C030-4C030-5C030 would specify 2000mA max current for channels 1 and 2, and 300mA for channels 3, 4 and 5.
		2C###	
		3C###	
		4C###	
		5C###	