

Features

- Ultra High Efficiency (Up to 91%)
- Active Power Factor Correction (0.99 Typical)
- Constant Current Output
- Lightning Protection
- All-Round Protection: SCP, OTP, OVP
- Waterproof (IP67)
- Comply With UL8750 & EN61347 Safety Regulations



Description

The EUC-120SxxxDT Series operate from a 90 ~ 305 Vac input range. These units will provide up to a 4.9 A of output current and a maximum output voltage of 343 V for 120 W maximum output power. They are designed to be highly efficient and highly reliable. The standard features include dimming control, lightning protection, over voltage protection, short circuit protection, and over temperature protection.

Models

Output Current	Input Voltage	Max. Output Voltage	Max. Output Power	Typical Efficiency (1)	Power Factor		Model Number (2)
					110Vac	220Vac	
350 mA	90 ~ 305 Vac	343 Vdc	120 W	91.0%	0.99	0.96	EUC-120S035DT
450 mA	90 ~ 305 Vac	266 Vdc	120 W	91.0%	0.99	0.96	EUC-120S045DT
700 mA	90 ~ 305 Vac	171 Vdc	120 W	91.0%	0.99	0.96	EUC-120S070DT
1050 mA	90 ~ 305 Vac	114 Vdc	120 W	90.5%	0.99	0.96	EUC-120S105DT
1400 mA	90 ~ 305 Vac	86 Vdc	120 W	90.5%	0.99	0.96	EUC-120S140DT
1750 mA	90 ~ 305 Vac	68 Vdc	120 W	90.5%	0.99	0.96	EUC-120S175DT
2100 mA	90 ~ 305 Vac	57 Vdc	120 W	90.5%	0.99	0.96	EUC-120S210DT
2450 mA	90 ~ 305 Vac	49 Vdc	120 W	90.5%	0.99	0.96	EUC-120S245DT
2800 mA	90 ~ 305 Vac	43 Vdc	120 W	90.5%	0.99	0.96	EUC-120S280DT
3150 mA	90 ~ 305 Vac	38 Vdc	120 W	90.0%	0.99	0.96	EUC-120S315DT
3500 mA	90 ~ 305 Vac	34 Vdc	120 W	90.0%	0.99	0.96	EUC-120S350DT
4200 mA	90 ~ 305 Vac	28 Vdc	120 W	90.0%	0.99	0.96	EUC-120S420DT
4900 mA	90 ~ 305 Vac	24 Vdc	120 W	90.0%	0.99	0.96	EUC-120S490DT

Notes: (1) Measured at full load and 220 Vac input.

(2) A suffix -xxxx may be added to denote variations or modifications to the base product, where x can be any alphanumeric character or blank.

Specifications are subject to changes without notice.

Input Specifications

Parameter	Min.	Typ.	Max.	Notes
Input Voltage	90 V	-	305 V	
Input Frequency	47 Hz	-	63 Hz	
Leakage Current	-	-	1 mA	At 277Vac 50Hz input
Input AC Current	-	-	1.5 A	Measured at full load and 100 Vac input.
	-	-	0.75 A	Measured at full load and 220 Vac input.
Inrush current	-	-	65 A	At 230Vac input 25°C Cold start

Output Specifications

Parameter	Min.	Typ.	Max.	Notes
Output Current Range				Without dimming
$I_o = 350 \text{ mA}$	332 mA	350 mA	368 mA	
$I_o = 450 \text{ mA}$	427 mA	450 mA	473 mA	
$I_o = 700 \text{ mA}$	665 mA	700 mA	735 mA	
$I_o = 1050 \text{ mA}$	997 mA	1050 mA	1102 mA	
$I_o = 1400 \text{ mA}$	1330 mA	1400 mA	1470 mA	
$I_o = 1750 \text{ mA}$	1662 mA	1750 mA	1837 mA	
$I_o = 2100 \text{ mA}$	1995 mA	2100 mA	2205 mA	
$I_o = 2450 \text{ mA}$	2327 mA	2450 mA	2572 mA	
$I_o = 2800 \text{ mA}$	2660 mA	2800 mA	2940 mA	
$I_o = 3150 \text{ mA}$	2992 mA	3150 mA	3307 mA	
$I_o = 3500 \text{ mA}$	3325 mA	3500 mA	3675 mA	
$I_o = 4200 \text{ mA}$	3990 mA	4200 mA	4410 mA	
$I_o = 4900 \text{ mA}$	4655 mA	4900 mA	5145 mA	
Output Voltage Range				
$I_o = 350 \text{ mA}$	206 V	-	343 V	
$I_o = 450 \text{ mA}$	160 V	-	266 V	
$I_o = 700 \text{ mA}$	103 V	-	171 V	
$I_o = 1050 \text{ mA}$	68 V	-	114 V	
$I_o = 1400 \text{ mA}$	52 V	-	86 V	
$I_o = 1750 \text{ mA}$	41 V	-	68 V	
$I_o = 2100 \text{ mA}$	34 V	-	57 V	
$I_o = 2450 \text{ mA}$	29 V	-	49 V	
$I_o = 2800 \text{ mA}$	26 V	-	43 V	
$I_o = 3150 \text{ mA}$	23 V	-	38 V	
$I_o = 3500 \text{ mA}$	20 V	-	34 V	
$I_o = 4200 \text{ mA}$	17 V	-	28 V	
$I_o = 4900 \text{ mA}$	14 V	-	24 V	
Ripple and Noise (pk-pk)	-	-	3% V_o	Measured by 20 MHz bandwidth oscilloscope and the output paralleled a 0.1 uF ceramic capacitor and a 10 uF electrolytic capacitor.
Line Regulation	-	-	1%	
Load Regulation	-	-	3%	
Turn-on Delay Time	-	0.6 S	1.0 S	Measured at 110Vac input.
	-	0.6 S	1.0 S	Measured at 220Vac input.

Note: All specifications are typical at 25 °C unless otherwise stated.

Specifications are subject to changes without notice.

Protection Functions

Parameter	Min.	Typ.	Max.	Notes
Over Voltage Protection				Latch mode. The power supply shall return to normal operation only after the power is turn-on again.
$I_o = 350$ mA	411 V	446 V	480 V	
$I_o = 450$ mA	319 V	346 V	373 V	
$I_o = 700$ mA	205 V	222 V	240 V	
$I_o = 1050$ mA	136 V	148 V	160 V	
$I_o = 1400$ mA	103 V	112 V	121 V	
$I_o = 1750$ mA	81 V	88 V	96 V	
$I_o = 2100$ mA	68 V	74 V	80 V	
$I_o = 2450$ mA	58 V	64 V	69 V	
$I_o = 2800$ mA	51 V	56 V	61 V	
$I_o = 3150$ mA	45 V	49 V	54 V	
$I_o = 3500$ mA	40 V	44 V	48 V	
$I_o = 4200$ mA	33 V	36 V	40 V	
$I_o = 4900$ mA	28 V	31 V	34 V	
Over Temperature Protection	-	110 °C	-	Maximum temperature of components inside the case.
Short Circuit Protection	No damage shall occur when any output operating in a short circuit condition. The power supply shall be self-recovery when the fault condition is removed.			

General Specifications

Parameter	Min.	Typ.	Max.	Notes
Efficiency				Measured at full load, 110Vac input, 25°C ambient temperature, after the unit is thermally stabilized. It will be lower about 1%, if measured immediately after startup.
$I_o = 350$ mA	88.0%	89.0%	-	
$I_o = 450$ mA	88.0%	89.0%	-	
$I_o = 700$ mA	88.0%	89.0%	-	
$I_o = 1050$ mA	87.5%	88.5%	-	
$I_o = 1400$ mA	87.5%	88.5%	-	
$I_o = 1750$ mA	87.5%	88.5%	-	
$I_o = 2100$ mA	87.5%	88.5%	-	
$I_o = 2450$ mA	87.5%	88.5%	-	
$I_o = 2800$ mA	87.5%	88.5%	-	
$I_o = 3150$ mA	87.0%	88.0%	-	
$I_o = 3500$ mA	87.0%	88.0%	-	
$I_o = 4200$ mA	87.0%	88.0%	-	
$I_o = 4900$ mA	87.0%	88.0%	-	
Efficiency				Measured at full load, 220Vac input, 25°C ambient temperature, after the unit is thermally stabilized. It will be lower about 1%, if measured immediately after startup.
$I_o = 350$ mA	90.0%	91.0%	-	
$I_o = 450$ mA	90.0%	91.0%	-	
$I_o = 700$ mA	90.0%	91.0%	-	
$I_o = 1050$ mA	89.5%	90.5%	-	
$I_o = 1400$ mA	89.5%	90.5%	-	
$I_o = 1750$ mA	89.5%	90.5%	-	
$I_o = 2100$ mA	89.5%	90.5%	-	
$I_o = 2450$ mA	89.5%	90.5%	-	
$I_o = 2800$ mA	89.5%	90.5%	-	
$I_o = 3150$ mA	89.0%	90.0%	-	
$I_o = 3500$ mA	89.0%	90.0%	-	
$I_o = 4200$ mA	89.0%	90.0%	-	
$I_o = 4900$ mA	89.0%	90.0%	-	
MTBF	$I_o = 4900$ mA $I_o = 350$ mA	249,000 hours 303,000 hours		Measured at 110Vac input, 80%Load and 25°C ambient temperature (MIL-HDBK-217F).
Life Time	$I_o = 4900$ mA $I_o = 350$ mA	71,000 hours 93,000 hours		Measured at 220Vac input, 80%Load and 45°C ambient temperature.
Dimensions	Inches (L x W x H) Millimeters (L x W x H)	7.64 x 2.66 x 1.46 194 x 67.5 x 37		
Net Weight		-	1000 g	

Note: All specifications are typical at 25 °C unless otherwise stated.

Specifications are subject to changes without notice.



Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes
Operating Temperature	-35 °C	-	+65 °C	Humidity: 10% RH to 100% RH
Storage Temperature	-40 °C	-	+85 °C	Humidity: 5% RH to 100% RH

Safety & EMC Compliance

Safety Category	Country	Standard
CUL	USA & Canada	UL8750, UL935, UL1012, CSA-C22.2 No. 107.1
CE	Europe	EN 61347-1, EN61347-2-13
EMI Standards		Notes
EN 55015		Conducted emission Test & Radiated emission Test with 6 dB margin
EMS Standards		Notes
EN 61000-3-2		Harmonic current emissions
EN 61000-3-3		Voltage fluctuations & flicker
EN 61000-4-2		Electrostatic Discharge (ESD): 8 kV air discharge, 4 kV contact discharge
EN 61000-4-3		Radio-Frequency Electromagnetic Field Susceptibility Test-RS
EN 61000-4-4		Electrical Fast Transient / Burst-EFT
EN 61000-4-5		Surge Immunity Test: AC Power Line: line to line 2 kV, line to earth 4 kV
EN 61000-4-6		Conducted Radio Frequency Disturbances Test-CS
EN 61000-4-8		Power Frequency Magnetic Field Test
EN 61000-4-11		Voltage Dips
EN 61547		Electromagnetic Immunity Requirements Applies To Lighting Equipment

Derating Curve

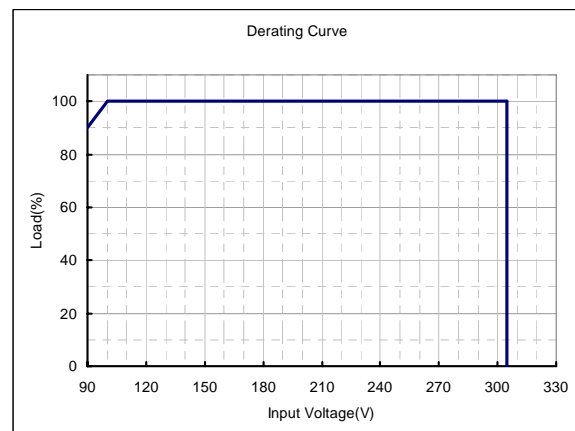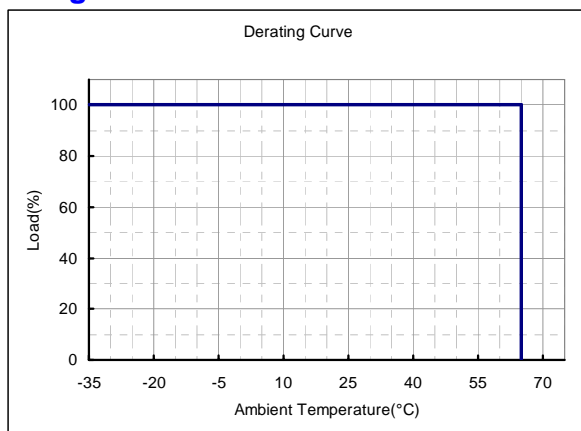



Specifications are subject to changes without notice.

Dimming Control (On secondary side)



The function has two versions. One is with internal pull-up resistor, the output is full load when the dimming leads are floated. Another is with internal pull-down resistor, the output is 10% full load when the dimming leads are floated.

1. With pull-up resistor (Default, without suffix):

Parameter	Min.	Typ.	Max.	Notes
Vcc	11.8 V	12 V	12.2 V	For 4900 mA
	14.7 V	15 V	15.3 V	For Other models
10V output source current	0 mA	-	10 mA	
Absolute maximum voltage on the 1~10V input pin	-2 V	-	12 V	
Source current on 1~10V input pin	0 mA	-	0.5 mA	
Value of Rin (the resistor inside the LED driver which locate between the 1-10V input and 10V output pin)	19.8 K	20 K	20.2 K	

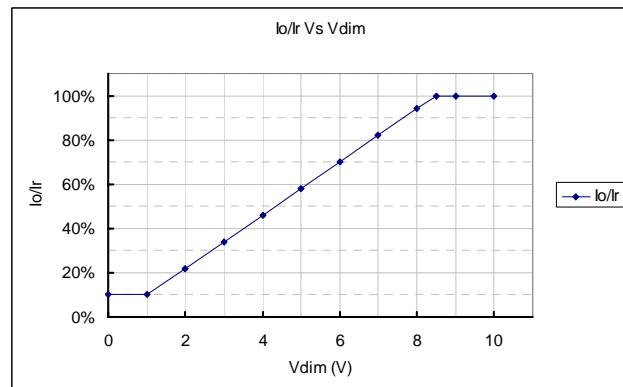
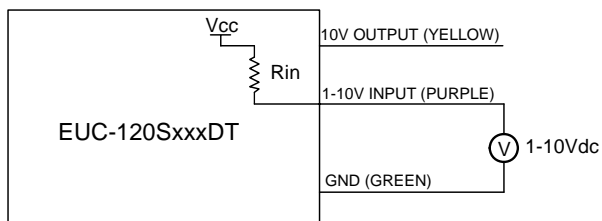


Implementation 1: DC input

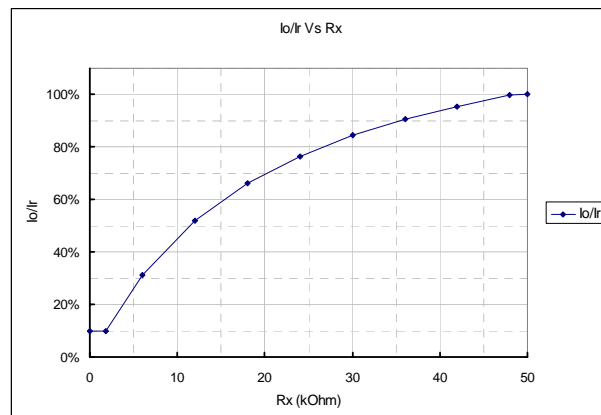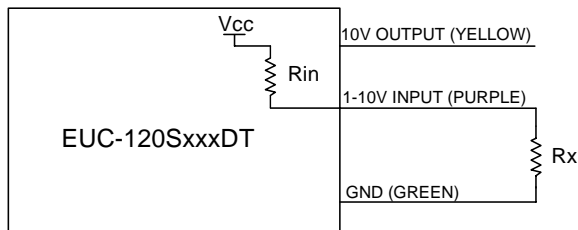

Implementation 2: External resistor (Vcc=12V)

Specifications are subject to changes without notice.

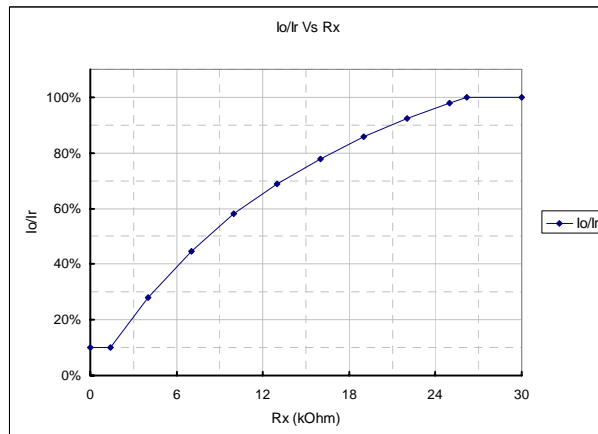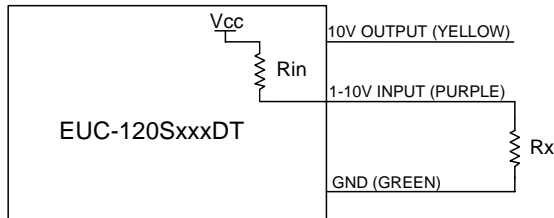



Implementation 3: External resistor ($V_{CC}=15V$)

Notes:

1. If the dimming function is not used, please let the dimming leads floated.
2. I_o is actual output current and I_r is rated current without dimming control.
3. For the driver to operate properly, the load voltage must be maintained above the minimum voltage threshold (approx. 50% of the max. output voltage for any given model).
4. If the output voltage is maintained above 50% of the maximum output voltage, the dimming control may be operated over the entire 1-10V range with output current varying from 100% down to practically 10%.
5. The dimming signal is allowed to be less than 1V, however, when it for 0-1V, the output current can maintain about 10% I_r . When it for 8.5-10V, the output current can maintain about 100% I_r .
6. Do not connect the GND of dimming to the output; otherwise, the LED driver can not work normally.



2. With pull-down resistor: (The model number has a suffix -0040)

Parameter	Min.	Typ.	Max.	Notes
10V output voltage	9.8 V	10 V	10.2 V	
10V output source current	0 mA	-	10 mA	
Absolute maximum voltage on the 1~10V input pin	-2 V	-	12 V	
Sink current on 1~10V input pin	0 mA	-	1 mA	
Value of R_{in} (the resistor inside the LED driver which locate between the 1-10V input and GND)	9.9 K	10 K	10.1 K	

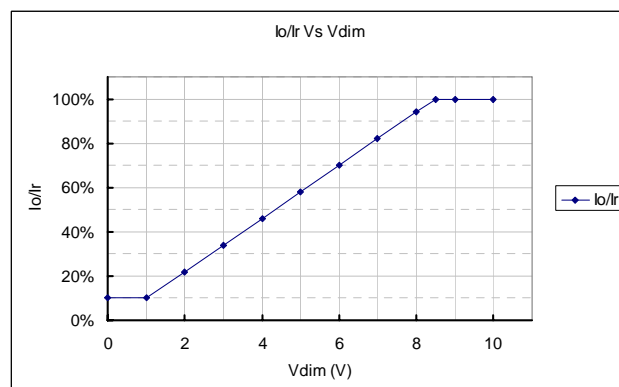
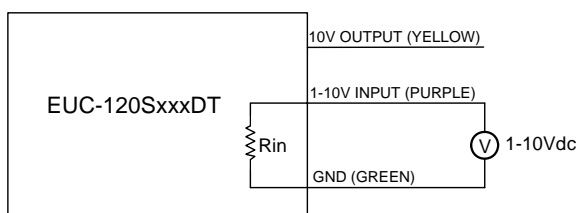


Implementation 1: DC input

Specifications are subject to changes without notice.

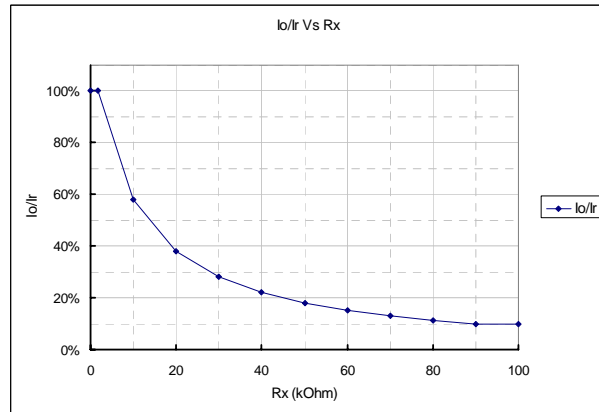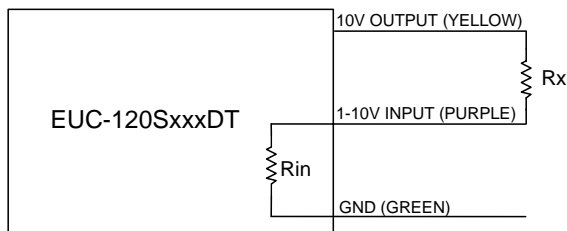

Implementation 2: External resistor

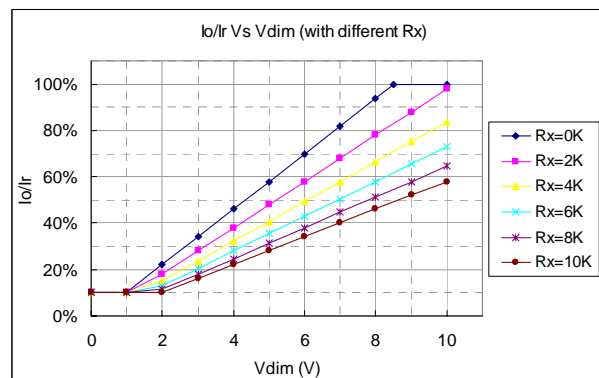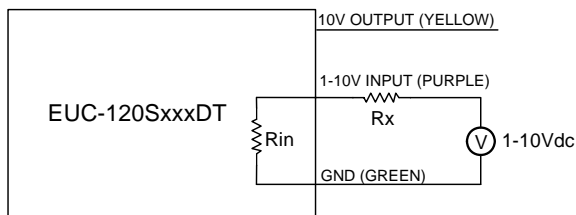

Implementation 3: External resistor and 1-10V DC Input

Notes:

1. If the dimming function is not used, please short 10V output pin (yellow) and 1-10 input pin (purple).
2. I_o is actual output current and I_r is rated current without dimming control.
3. For the driver to operate properly, the load voltage must be maintained above the minimum voltage threshold (approx. 50% of the max. output voltage for any given model).
4. If the output voltage is maintained above 50% of the maximum output voltage, the dimming control may be operated over the entire 1-10V range with output current varying from 100% down to practically 10%.
5. The dimming signal is allowed to be less than 1V, however, when it for 0-1V, the output current can maintain about 10% I_r . When it for 8.5-10V, the output current can maintain about 100% I_r .
6. Do not connect the GND of dimming to the output; otherwise, the LED driver can not work normally.

Specifications are subject to changes without notice.

