





















■ Features

- · Constant Voltage + Constant Current mode output
- Metal housing with class I design
- · Built-in active PFC function
- · Class 2 power unit
- IP67 / IP65 rating for indoor or outdoor installations
- Function options: output adjustable via potentiometer;
 3 in 1 dimming; Timer dimming
- Typical lifetime > 62000 hours
- 7 years warranty

Applications

- · LED street lighting
- · LED high-bay lighting
- Parking space lighting
- LED fishing lamp
- LED greenhouse lighting
- Type "HL" for use in Class I, Division 2 hazardous (Classified) location.

Description

HLG-80H series is a 80W AC/DC LED driver featuring the dual mode constant voltage and constant current output. HLG-80H operates from $90 \sim 305 \text{VAC}$ and offers models with different rated voltage ranging between 12V and 54V. Thanks to the high efficiency up to 91%, with the fanless design, the entire series is able to operate for -40°C \sim +80°C case temperature under free air convection. The design of metal housing and IP67/IP65 ingress protection level allows this series to fit both indoor and outdoor applications. HLG-80H is equipped with various function options, such as dimming methodologies, so as to provide the optimal design flexibility for LED lighting system.

■ Model Encoding



Type	IP Level	Function	Note
Blank	IP67	Io and Vo fixed	In Stock
Α	IP65	Io and Vo adjustable through built-in potentiometer	In Stock
В	IP67	3 in 1 dimming function (1~10VDC, 10V PWM signal and resistance)	In Stock
BL	IP66	B-Type with junction box. UL8750 LISTED. Contact MEAN WELL for details	By request
D	IP67	Timer dimming function, contact MEAN WELL for details(safety pending).	By request




SPECIFICATION

MODEL	DC VOLTACE	HLG-80H-12									
	DC VOLTACE		HLG-80H-15	HLG-80H-20	HLG-80H-24	HLG-80H-30	HLG-80H-36	HLG-80H-42	HLG-80H-48	HLG-80H-54	
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V	
	CONSTANT CURRENT REGION Note.4	7.2 ~12V	9 ~ 15V	12 ~ 20V	14.4 ~ 24V	18 ~ 30V	21.6 ~ 36V	25.2 ~ 42V	28.8 ~ 48V	32.4 ~ 54V	
	RATED CURRENT	5A	5A	4A	3.4A	2.7A	2.3A	1.95A	1.7A	1.5A	
	RATED POWER	60W	75W	80W	81.6W	81W	82.8W	81.9W	81.6W	81W	
	RIPPLE & NOISE (max.) Note.2		150mVp-p	150mVp-p	150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	
	THI I LE & NOIDE (IIIAX.) Note.2			(via built-in po		200πνρ-ρ	200111V p-p	200111 γ ρ-ρ	200111Vp-p	200111 v p-p	
	VOLTAGE ADJ. RANGE					07 001/	22 401/	20 401/	40 501/	40 50)/	
OUTPUT		10.8 ~ 13.5V		17 ~ 22V	22 ~ 27V	27 ~ 33V	33 ~ 40V	38 ~ 46V	43 ~ 53V	49 ~ 58V	
	CURRENT ADJ. RANGE	_ ·		(via built-in po	· · · · · ·	I		I	T	I	
		3 ~ 5A	3 ~ 5A	2.4 ~ 4A	2.04 ~ 3.4A	1.62 ~ 2.7A	1.38 ~ 2.3A	1.17 ~ 1.95A	1.02 ~ 1.7A	0.9 ~ 1.5A	
	VOLTAGE TOLERANCE Note.3	±2.5%	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	$\pm 0.5\%$	$\pm 0.5\%$	±0.5%	±0.5%	
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	$\pm 0.5\%$	±0.5%	$\pm 0.5\%$	$\pm 0.5\%$	±0.5%	±0.5%	
	SETUP, RISE TIME Note.6	1200ms,200r	ns/115VAC 5	00ms,200ms/2	230VAC						
	HOLD UP TIME (Typ.)	16ms at full lo	ad 230VAC	/115VAC							
	() ,	90 ~ 305VAC	127 ~ 431	1VDC							
	VOLTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC (Please refer to "STATIC CHARACTERISTIC" section)									
	EDECHENCY DANCE										
	FREQUENCY RANGE	47 ~ 63Hz		0/000/40 DE	> 0 0 4 (0 = =) 44 .						
	POWER FACTOR (Typ.)	$PF \ge 0.96/115VAC$, $PF \ge 0.96/230VAC$, $PF \ge 0.94/277VAC$ @ full load									
		(Please refer to "POWER FACTOR (PF) CHARACTERISTIC" section)									
	TOTAL HARMONIC DISTORTION	THD< 20% ((@ load≧60% .	/ 115VAC,230\	VAC; @ load≧	≧75% / 277VA	C)				
INPUT	TOTAL HARMONIO DIOTORTION	(Please refe	to "TOTAL HA	ARMONIC DIS	TORTION (TH	ID)" section)					
	EFFICIENCY (Typ.)	88%	89%	90%	90.5%	91%	91%	91%	91%	91%	
	AC CURRENT (Typ.)	0.85A / 115VA	AC 0.425	A / 230VAC	0.4A / 277VA	AC .					
	INRUSH CURRENT (Typ.)	COLD START	70A(twidth=485	ius measured at	t 50% Ipeak) at 2	230VAC; Per NE	MA 410				
	MAX. No. of PSUs on 16A		(,	, , , , , , , , , , , , , , , , , , , ,						
	CIRCUIT BREAKER	3 units (circui	t breaker of typ	e B) / 6 units (circuit breaker	of type C) at 23	30VAC				
		40.75 A 1.077 M.O.									
	LEAKAGE CURRENT	<0.75mA / 27	7 VAC								
	OVER CURRENT	95 ~ 108%									
		Constant current limiting, recovers automatically after fault condition is removed									
DDOTECTION	SHORT CIRCUIT	Hiccup mode,	recovers auto	matically after	fault condition	is removed					
PROTECTION		14 ~ 17V	18 ~ 24V	23 ~ 30V	28 ~ 35V	35 ~ 43V	41 ~ 49V	48 ~ 58V	54 ~ 63V	59 ~ 68V	
	OVER VOLTAGE	Shut down o/	o voltage, re-po	ower on to reco	ver						
	OVER TEMPERATURE	Shut down o/r	voltage, re-po	ower on to reco	ver						
	WORKING TEMP.	-				TEMPERATU	RF" section)				
	MAX. CASE TEMP.	Tcase= +80°(01010110 00	11 01 20/10 11	J I E WIT E I O TI O	112 00001011)				
			non-condensir	20							
ENVIRONMENT	WORKING HUMIDITY			ig							
- F	STORAGE TEMP., HUMIDITY	-40 ~ +80°C,									
	TEMP. COEFFICIENT	±0.03%/°C (±0.03%/°C (0 ~ 60°C)								
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes									
	CAFETY OTANDADDO	UL8750(type"HL"), CSA C22.2 No. 250.0-08(except for HLG-80H-48/54V & HLG-80H-48/54BL), UL8750 LISTED for HLG-80H-□BL; TUV EN61347-									
	SAFETY STANDARDS Note.8	EN61347-2-13 independent, optional models for J61347-1, J61347-2-13, IP65 or IP67 approved; Design refer to UL60950-1, TUV EN60950-1									
SAFETY &	WITHSTAND VOLTAGE			-				, ,			
EMC	ISOLATION RESISTANCE	I/P-O/P:3.75KVAC									
							100 2 2				
						≧60%) ; EN610		=	0/1: 1: 0	10.0	
	EMC IMMUNITY			0		industry level (surge immunit	y Line-Earth 41	(V, Line-Line 2	KV)	
	MTBF	357.8K hrs m	in. MIL-HDE	8K-217F (25°C))						
OTHERS	DIMENSION	195.6*61.5*3	8.8mm (L*W*H)							
	PACKING	0.84Kg; 16pcs	s/14.4Kg/0.540	CUFT							
NOTE	1. All parameters NOT special	ally mentioned are measured at 230VAC input, rated current and 25 $^{\circ}\mathrm{C}$ of ambient temperature.									
NOTE	2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor.										
	3. Tolerance: includes set up tolerance, line regulation and load regulation.										
	4. Please refer to "DRIVING METHODS OF LED MODULE".										
	5. De-rating may be needed under low input voltages. Please refer to "STATIC CHARACTERISTIC" sections for details.										
	o. De fating may be neceded a	6. Length of set up time is measured at first cold start. Turning ON/OFF the driver may lead to increase of the set up time.									
		acarca at mot	7. The driver is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the								
	6. Length of set up time is me		that will be ope	erated in comb	iriation with iir	nai equipment.	Since EIVIC pe	erformance wil	be affected by	y the	
	6. Length of set up time is me	a component							l be affected by	y the	
	6. Length of set up time is me 7. The driver is considered as	a component i al equipment r	manufacturers	must re-qualify	/ EMC Directiv	ve on the comp	lete installatio	n again.			
	Length of set up time is me The driver is considered as complete installation, the fin	a component ral equipment ral (GB19510.14,	manufacturers GB19510.1, (must re-qualify GB17743 and	/ EMC Directiv GB17625.1) is	ve on the comp an optional m	lete installation odel Please	n again. contact MEAN	WELL for det		
	Length of set up time is me The driver is considered as complete installation, the fin The model certified for CCC	a component ral equipment ral (GB19510.14,	manufacturers GB19510.1, (must re-qualify GB17743 and	/ EMC Directiv GB17625.1) is	ve on the comp an optional m	lete installation odel Please	n again. contact MEAN	WELL for det		
	Length of set up time is me The driver is considered as complete installation, the fin The model certified for CCC To fulfill requirements of the	a component of all equipment of all equi	manufacturers GB19510.1, (ulation for ligh	must re-qualify GB17743 and ting fixtures, th	/ EMC Directiv GB17625.1) is iis LED driver	ve on the comp an optional m can only be us	lete installation odel . Please ed behind a s	n again. contact MEAN witch without p	WELL for det	ails.	




■ BLOCK DIAGRAM

Fosc: 100KHz

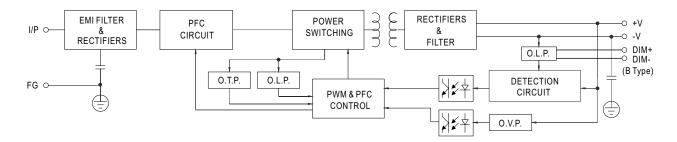

■ DRIVING METHODS OF LED MODULE

X This series is able to work in either Constant Current mode (a direct drive way) or Constant Voltage mode (usually through additional DC/DC driver) to drive the LEDs.

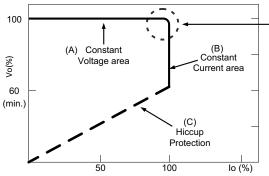


In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.

Typical output current normalized by rated current (%)




■ DIMMING OPERATION

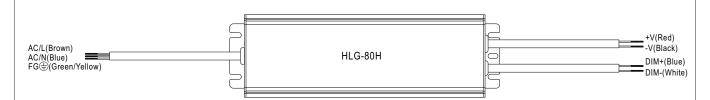


imes 3 in 1 dimming function (for B-Type)

- Output constant current level can be adjusted by applying one of the three methodologies between DIM+ and DIM-:
 1 ~ 10VDC, or 10V PWM signal or resistance.
- Direct connecting to LEDs is suggested. It is not suitable to be used with additional drivers.
- Dimming source current from power supply: $100\mu A$ (typ.)
- O Applying additive 1 ~ 10VDC

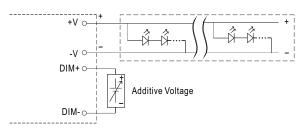


"DO NOT connect "DIM- to -V"

O Applying additive 10V PWM signal (frequency range 100Hz ~ 3KHz):

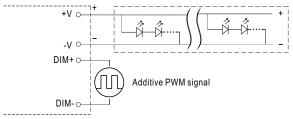



"DO NOT connect "DIM- to -V"


Applying additive resistance:

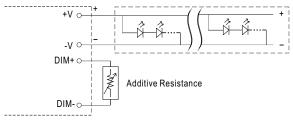

"DO NOT connect "DIM- to -V"











Note: In the case of turning the lighting fixture down to 0% brightness, please refer to the configuration as follow, or please contact MEAN WELL for other options.

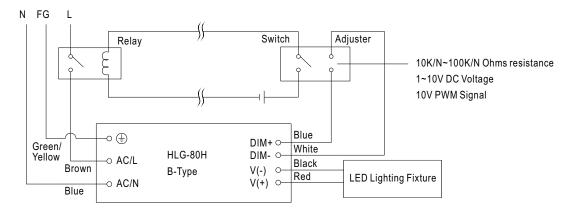


Using a switch and relay can turn ON/OFF the lighting fixture.



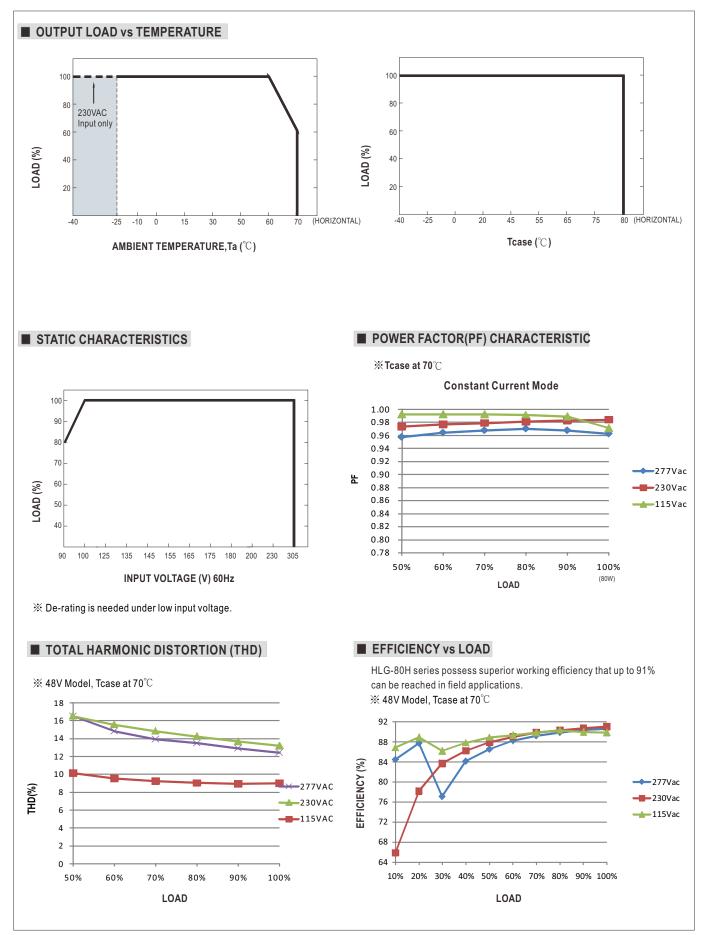




■ LIFETIME

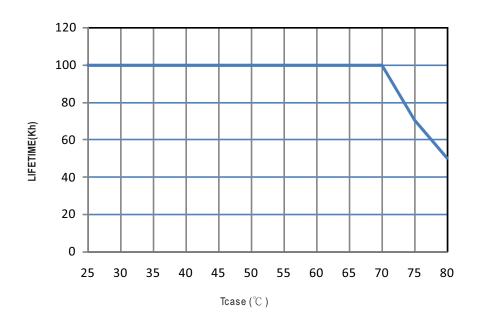



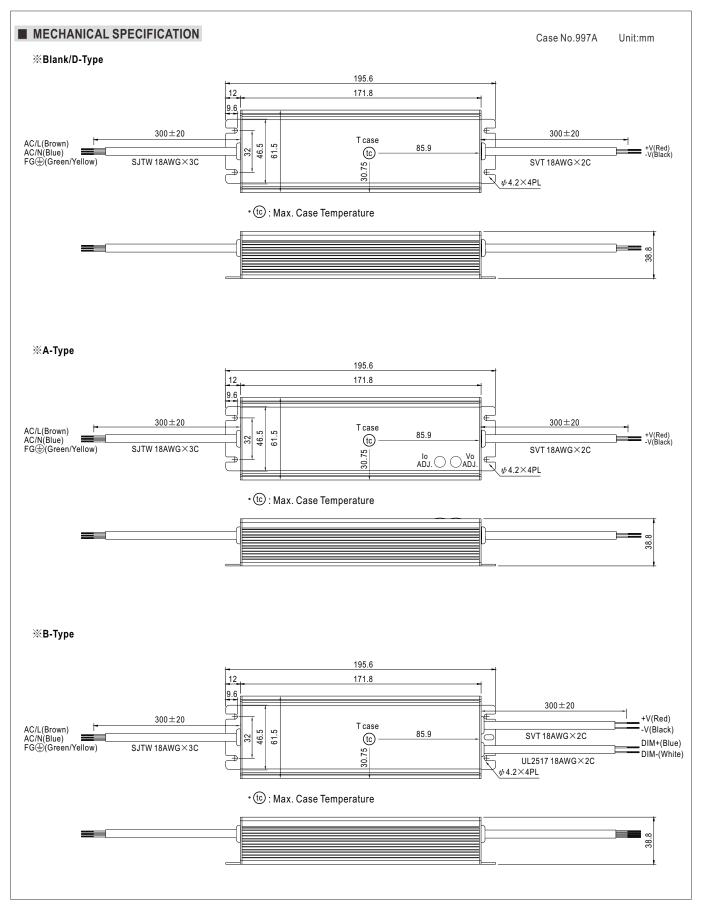



■ WATERPROOF CONNECTION


Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-80H to operate in dry/wet/damp or outdoor environment.




Size	Pin Configuration (Female)				
M12	00	000			
IVITZ	4-PIN	5-PIN			
	5A/PIN	5A/PIN			
Order No.	M12-04	M12-05			
Suitable Current	10A max.	10A max.			

Size	Pin Configuration (Female)			
M15	\odot			
MITO	2-PIN			
	12A/PIN			
Order No.	M15-02			
Suitable Current	12A max.			




X Cable Joiner

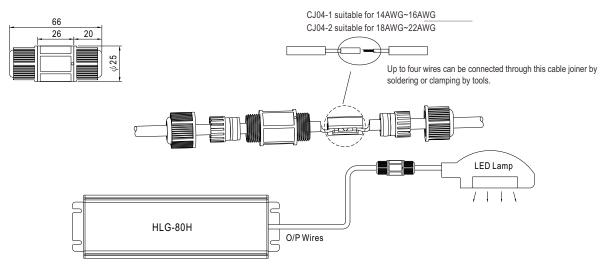

© CJ04 cable joiner can be purchased independently for user's own assembly. MEAN WELL order No.: CJ04-1, CJ04-2.

% Junction Box Option

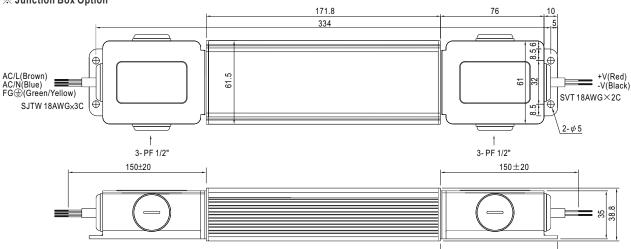

- ☐ Junction box option is available for A/B/Blank Type. Please contact MEAW WELL for details. ☐
- HLG-80H☐ BL models with junction box on both input and output sides are UL LISTED approved(modified by B type only).

■ INSTALLATION MANUAL

Please refer to : http://www.meanwell.com/manual.html