

## Low Supply Voltage Single Operational Amplifier with Full Swing Input and Output

### ■ GENERAL DESCRIPTION

NJM2730 is a single supply single operational amplifier with full swing input and output, operates from 1.8V.

Input and Output Full Swing provides wide dynamic range, is from ground to power supply level. In addition to ground sensing applications, NJM2730 enable to be applied to Hi-side sensing applications.

The features are low noise and high phase margin for battery management, portable audio applications, and others. Furthermore NJM2730 is packaged with small size package MTP-5.

### ■ PACKAGE OUTLINE




**NJM2730F**

### ■ FEATURES

- Single Supply
- Operating Voltage 1.8 to 5.0V
- Input Full-Swing  $V_{ICM} = 0$  to 5.0V at  $V^+ = 5V$
- Output Full-Swing  $V_{OH} \geq 4.9V / V_{OL} \leq 0.1V$  at  $V^+ = 5V, R_L = 20k\Omega$
- Load Drivability  $V_{OH} \geq 4.75V / V_{OL} \leq 0.25V$  at  $V^+ = 5V, R_L = 2k\Omega$
- Offset Voltage 5mV max
- Slew Rate 0.4V/ $\mu$ s typ.
- Low Input Voltage Noise 10nV/ $\sqrt{Hz}$  typ.
- Adequate phase margin  $\Phi_M = 75$ deg. typ. at  $R_L = 2k\Omega$ , voltage follower
- Bipolar Technology
- Package Outline MTP5

### ■ PIN CONFIGURATION

(Top View)



# NJM2730

## ■ ABSOLUTE MAXIMUM RATINGS

| (Ta=25°C)                       |                  |             |      |
|---------------------------------|------------------|-------------|------|
| PARAMETER                       | SYMBOL           | RATINGS     | UNIT |
| Supply Voltage                  | V <sup>+</sup>   | 7.0         | V    |
| Differential Input Voltage      | V <sub>ID</sub>  | ±1.0        | V    |
| Input Common Mode Voltage Range | V <sub>ICM</sub> | 0 to 7.0    | V    |
| Power Dissipation               | P <sub>D</sub>   | 200         | mW   |
| Operating Temperature Range     | T <sub>opr</sub> | -40 to +85  | °C   |
| Storage Temperature Range       | T <sub>stg</sub> | -40 to +125 | °C   |

(Note1)

If the supply voltage ( V<sup>+</sup> ) is less than 7V, the input voltage must not over the V<sup>+</sup> level through 7V is limit specified.

## ■ RECOMMENDED OPERATING CONDITION

| (Ta=25°C)      |                |            |      |
|----------------|----------------|------------|------|
| PARAMETER      | SYMBOL         | RATING     | UNIT |
| Supply Voltage | V <sup>+</sup> | 1.8 to 5.0 | V    |

## ■ ELECTRICAL CHARACTERISTICS

### ● DC CHARACTERISTICS

(V<sup>+</sup>=5V, Ta=25°C)

| PARAMETER                       | SYMBOL           | TEST CONDITION   | MIN  | TYP  | MAX  | UNIT |
|---------------------------------|------------------|--|------|------|------|------|
| Operating Current               | I <sub>CC</sub>  | No Signal  | -    | 320  | 550  | μA   |
| Input Offset Voltage            | V <sub>IO</sub>  |  | -    | 1    | 5    | mV   |
| Input Bias Current              | I <sub>B</sub>   |  | -    | 50   | 250  | nA   |
| Input Offset Current            | I <sub>IO</sub>  |  | -    | 5    | 100  | nA   |
| Voltage Gain                    | A <sub>V</sub>   | R <sub>L</sub> =2kΩ  | 60   | 85   | -    | dB   |
| Common Mode Rejection Ratio     | CMR              | CMR+: 2.5V ≤ V <sub>CM</sub> ≤ 5.0V,<br>CMR-: 0 ≤ V <sub>CM</sub> ≤ 2.5V (Note2) | 55   | 70   | -    | dB   |
| Supply Voltage Rejection Ratio  | SVR              |  | 70   | 85   | -    | dB   |
| Maximum Output Voltage 1        | V <sub>OH1</sub> | R <sub>L</sub> =20kΩ   | 4.9  | 4.95 | -    | V    |
|                                 | V <sub>OL1</sub> | R <sub>L</sub> =20kΩ   | -    | 0.05 | 0.1  |      |
| Maximum Output Voltage 2        | V <sub>OH2</sub> | R <sub>L</sub> =2kΩ  | 4.75 | 4.85 | -    | V    |
|                                 | V <sub>OL2</sub> | R <sub>L</sub> =2kΩ  | -    | 0.15 | 0.25 |      |
| Input Common Mode Voltage Range | V <sub>ICM</sub> | CMR>55dB   | 0    | -    | 5    | V    |

(Note2) CMR is represented by either CMR+ or CMR- which has lower value.

CMR+ is measured with 2.5V ≤ V<sub>CM</sub> ≤ 5V and CMR- is measured with 0V ≤ V<sub>CM</sub> ≤ 2.5V .

### ● AC CHARACTERISTICS

(V<sup>+</sup>=5V, Ta=25°C)

| PARAMETER                      | SYMBOL         | TEST CONDITION      | MIN | TYP | MAX | UNIT       |
|--------------------------------|----------------|---------------------|-----|-----|-----|------------|
| Unity Gain Bandwidth           | f <sub>T</sub> | R <sub>L</sub> =2kΩ | -   | 1   | -   | MHz        |
| Phase Margin                   | Φ <sub>M</sub> | R <sub>L</sub> =2kΩ | -   | 75  | -   | Deg        |
| Equivalent Input Noise Voltage | V <sub>N</sub> | f=1kHz              | -   | 10  | -   | nV/<br>√Hz |

### ● TRANSIENT CHARACTERISTICS

(V<sup>+</sup>=5V, Ta=25°C)

| PARAMETER | SYMBOL | TEST CONDITION      | MIN | TYP | MAX | UNIT |
|-----------|--------|---------------------|-----|-----|-----|------|
| Slew Rate | SR     | R <sub>L</sub> =2kΩ | -   | 0.4 | -   | V/μs |

## ■ TERMINAL CHARACTERISTICS


| No. | Symbol | Equivalent Circuit | Typ.DC Voltage(V) | Function            |
|-----|--------|--------------------|-------------------|---------------------|
| 1   | +INPUT |                    |                   | non-inverting input |
| 3   | -INPUT |                    |                   | inverting input     |
| 4   | VOUT   |                    |                   | output              |

# NJM2730


## ■ TYPICAL CHARACTERISTICS

(Note:  $R_s, R_g, R_L$  and  $C_L$  are connected to  $V^+/2$  when single supply.)


Operating Current vs. Operating Voltage

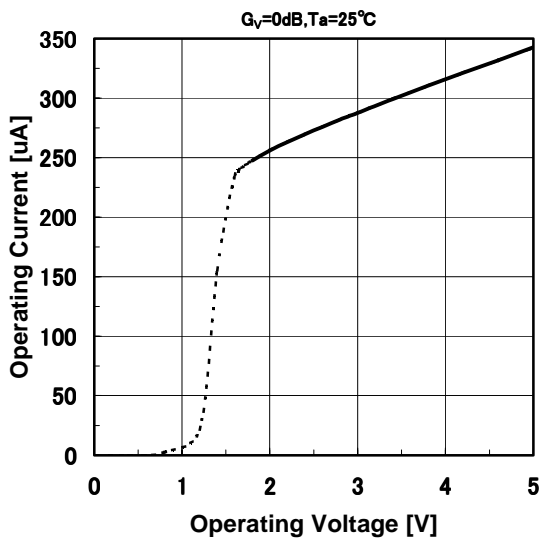


Operating Current vs. Operating Voltage

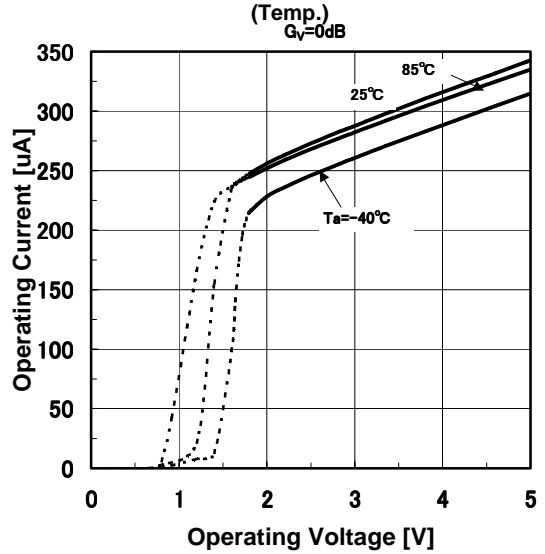


Operating Current vs. Temperature

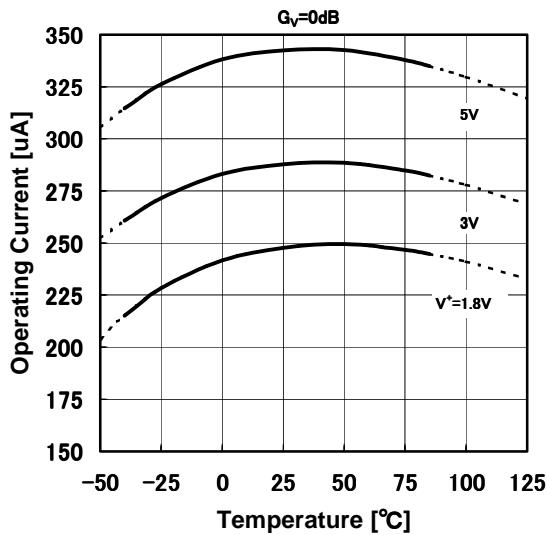


Input Offset Voltage vs. Temperature






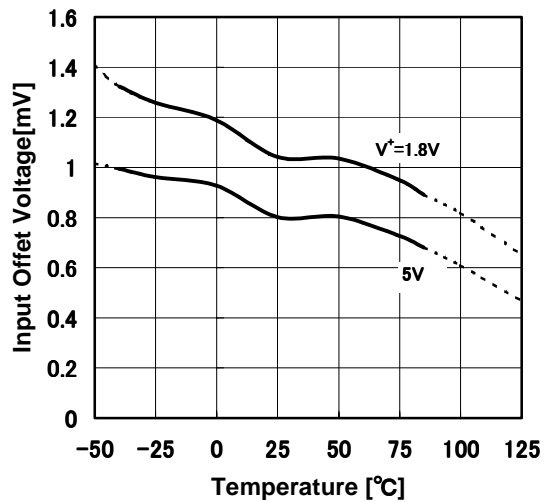


Input Bias Current vs. Temperature

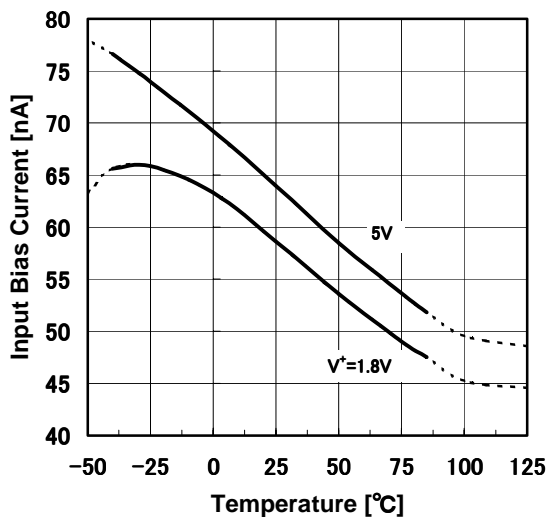


Input Offset Current vs. Temperature

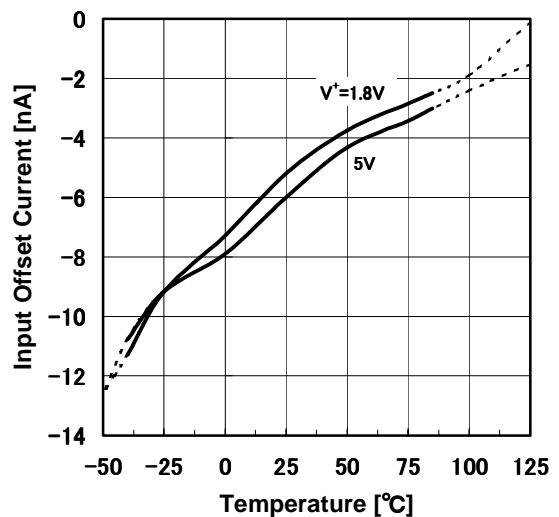

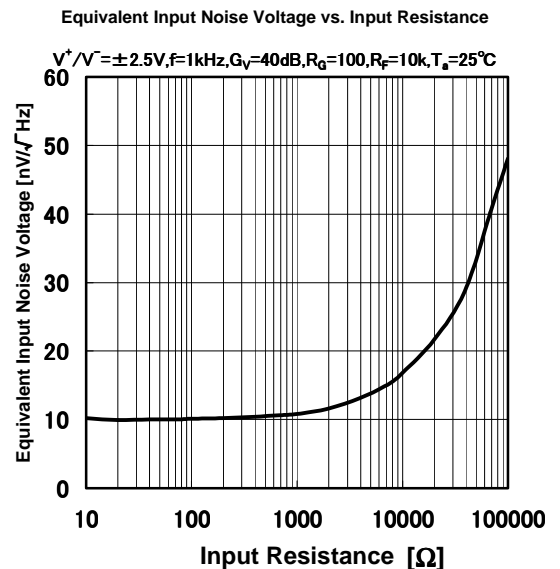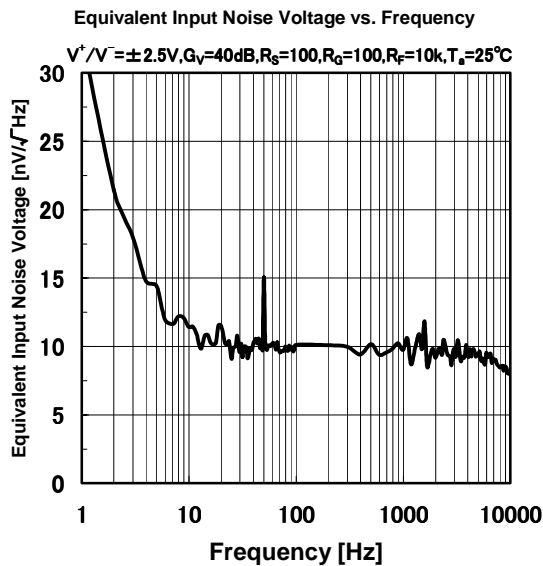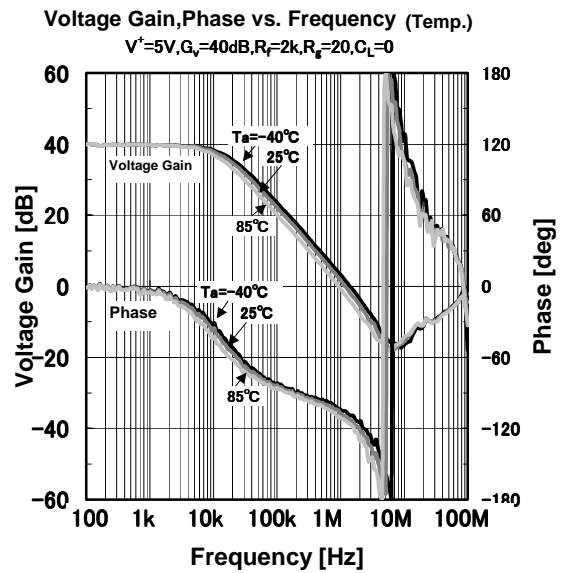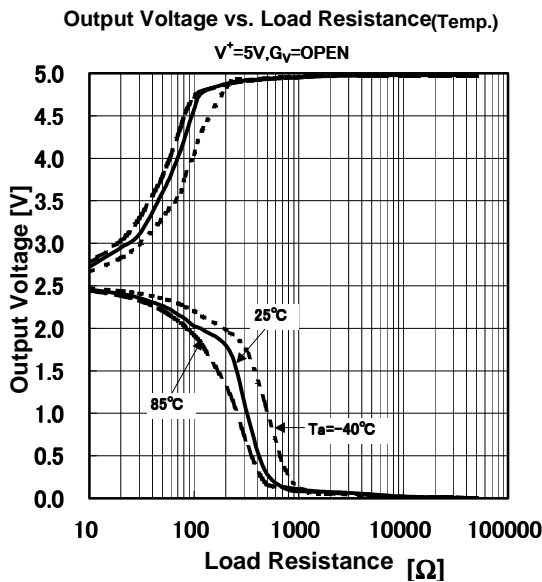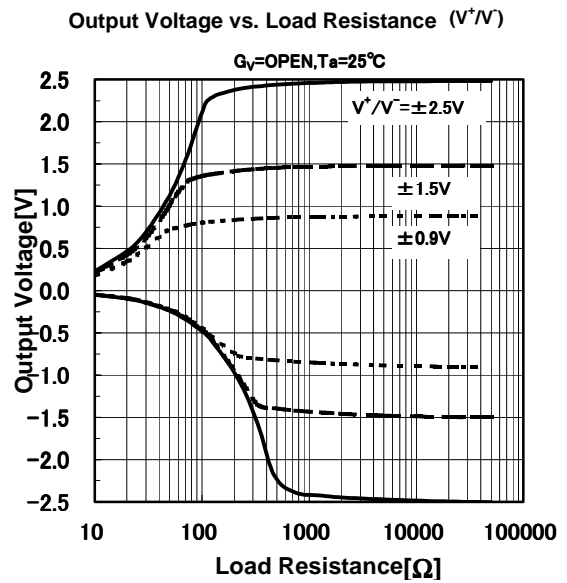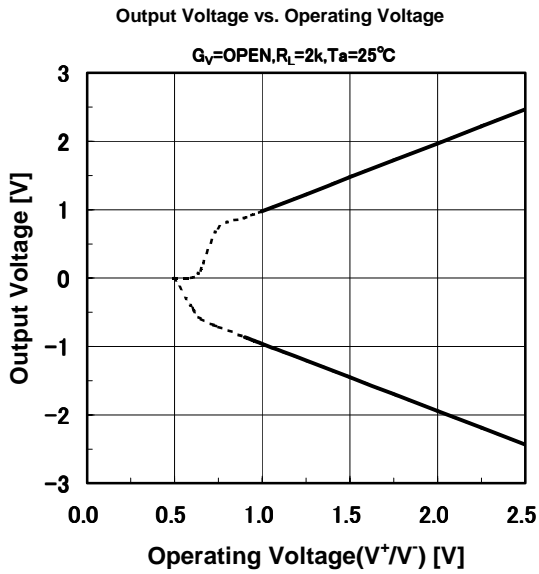


V.F.Peak vs.Frequency (Load C.)

$V^+=5V, G_v=0dB, R_L=2k, T_a=25^\circ C$

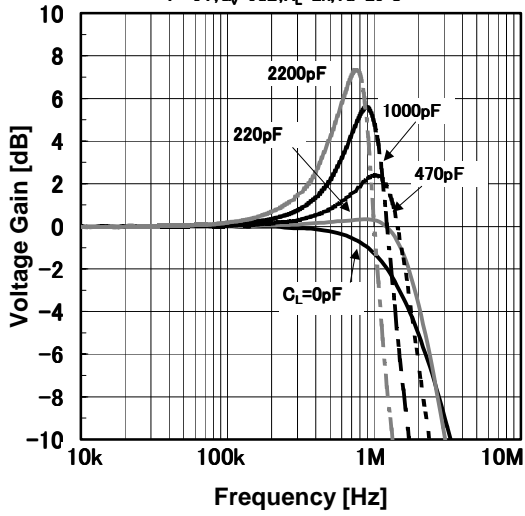


V.F.Peak vs.Frequency (Temp.)

$V^+=5V, G_v=0dB, R_L=2k, C_L=1nF$

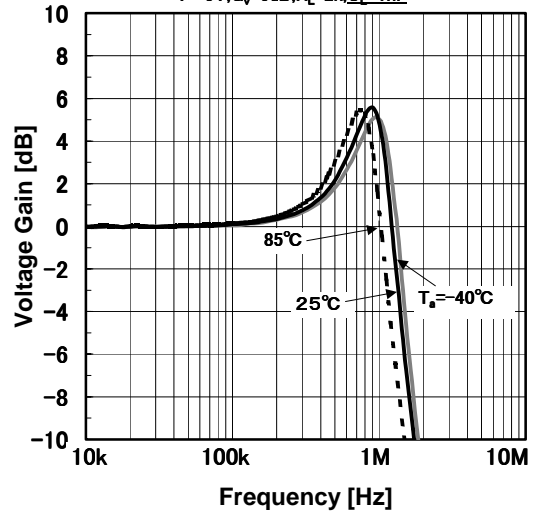


Common Mode Rejection Ratio vs. Temperature

$V_{in}=V^+, V^+ / 2, GND$

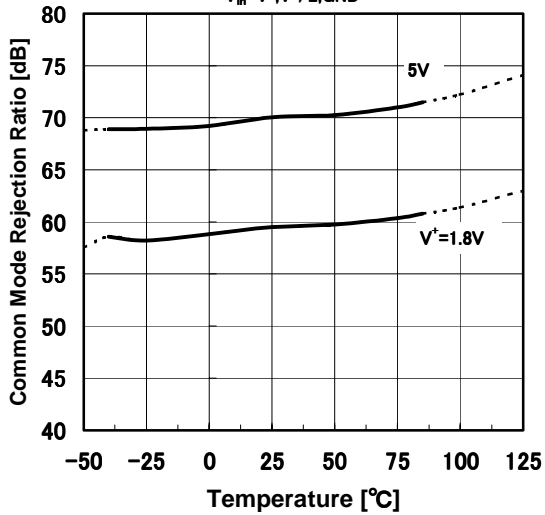


Supply Voltage Rejection Ratio vs. Temperature

$V^+=5$  to  $1.8V$

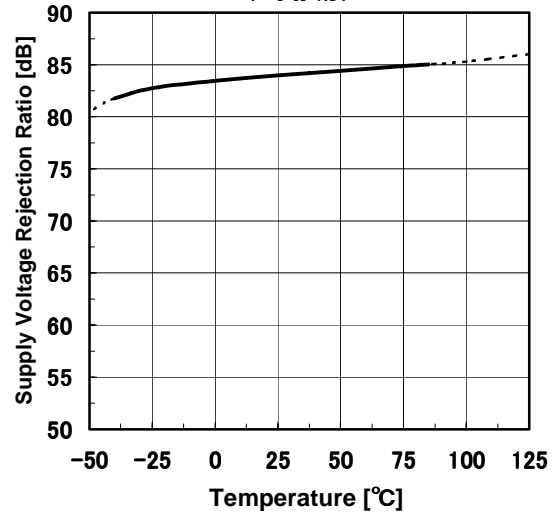


**Overshoot vs. Load Capacitance**

$V^+=5V, V_{in}^-=1V_{p-p}, f=10kHz, G_v=0dB$   
 $R_s=50, R_l=2k, T_a=25^\circ C$

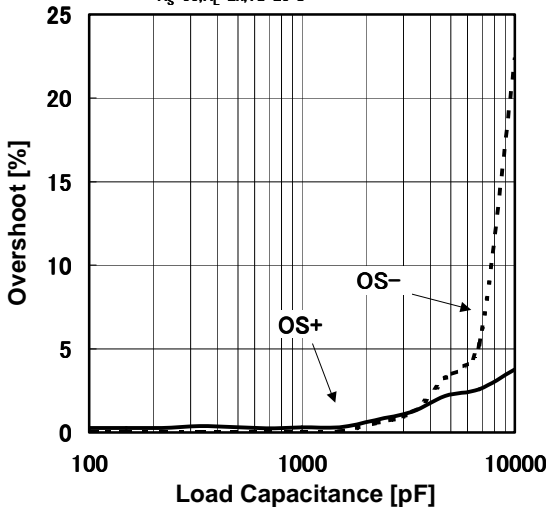


**Phase Margin vs. Load Capacitance**

$V^+=5V, G_v=40dB, V_{in}^-=30dBm,$   
 $R_s=50, R_g=20, R_l=2k, T_a=25^\circ C$

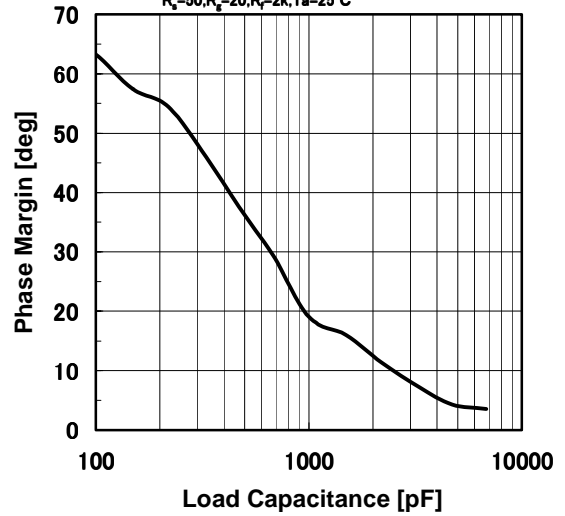


**Gain Bandwidth Product vs. Load Capacitance**

$V^+=5V, G_v=40dB, V_{in}^-=30dBm,$   
 $R_s=50, R_g=20, R_l=2k, T_a=25^\circ C$

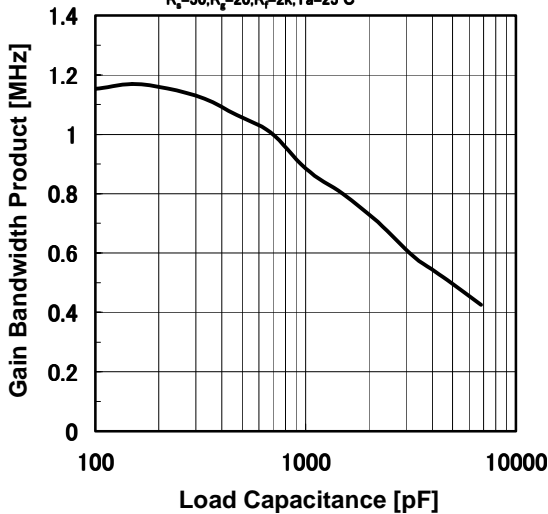


**Pulse Response**

$V^+=5V, V_{in}^-=1V_{p-p}, f=10kHz, G_v=0dB$   
 $R_s=50, R_l=2k, C_l=0F, T_a=25^\circ C$

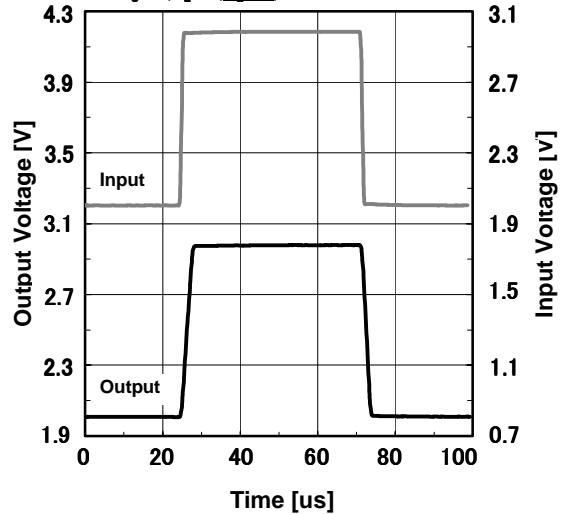


**Pulse Response(Rise) (Temp.)**





$V^+=5V, V_{in}^-=1V_{p-p}, f=10kHz,$   
 $G_v=0dB, R_s=50, R_l=2k, C_l=0F$

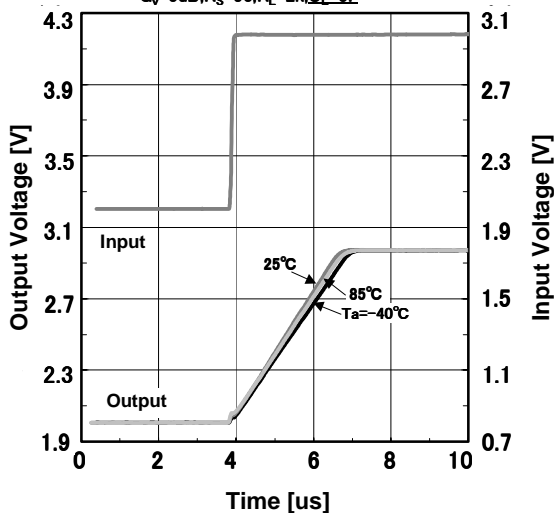

**Pulse Response(Fall) (Temp.)**

$V^+=5V, V_{in}^-=1V_{p-p}, f=10kHz,$   
 $G_v=0dB, R_s=50, R_l=2k, C_l=0F$

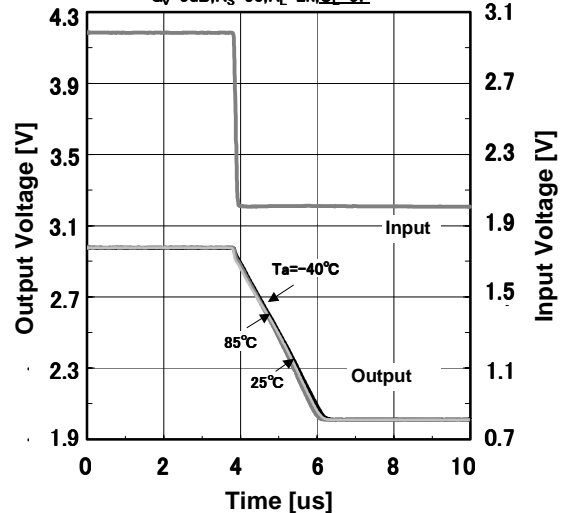

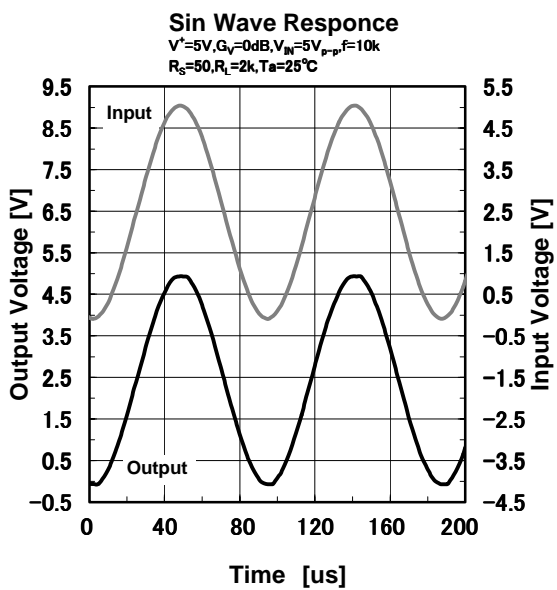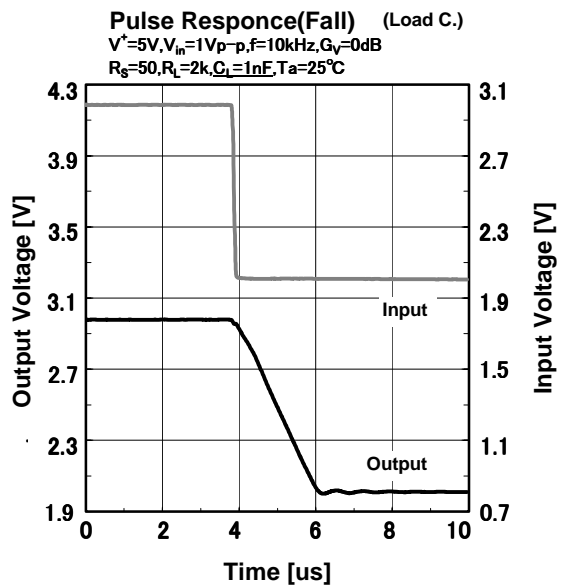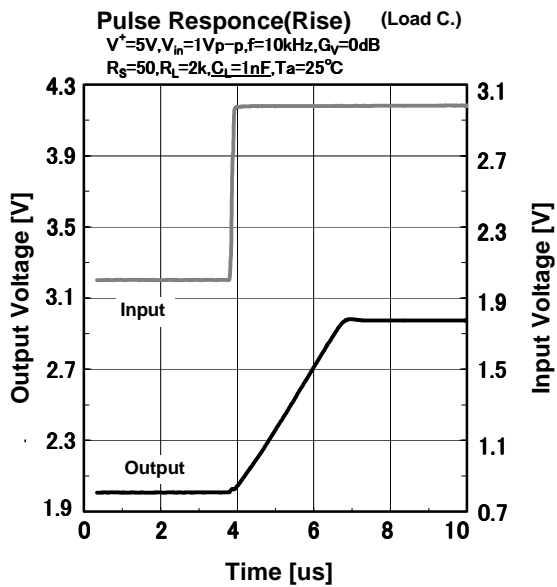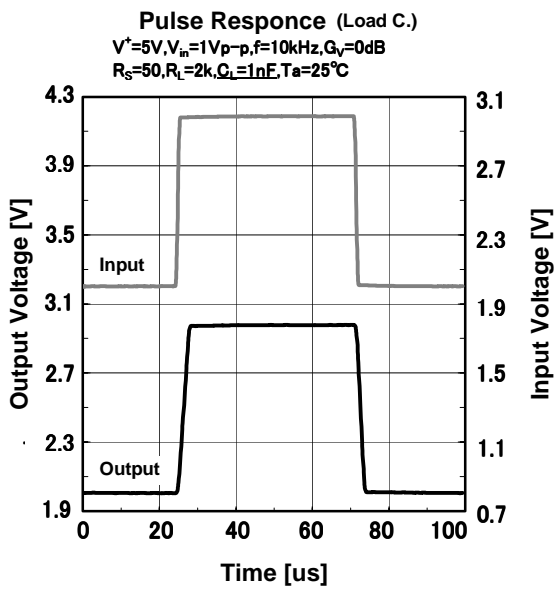



## ■ MEMO

**[CAUTION]**

The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.