SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 (TRACEABLE TO F4341)

CSA CERTIFIED: CSA 22.2, # 0,0.4,8 (TRACEABLE TD F4341)

VDE APPROVED: EN 133 200 (TRACEABLE TO F4341)

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 15 AMP/40°C, 120/250 VAC

LINE FREQUENCY: 50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND: 0.16 mA@ 120V 60Hz 0.28 mA@ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, Ir.

IN AN AMBIENT, $T_{0}\,,$ HIGHER THAN 40°C, THE MAXIMUM OPERATING

CURRENT, IO, IS AS FOLLOWS:

 $/ 100 - T_0$ $I_0 = I_r -$ 60

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 ZECONDS

CATALOG # 15ERK1 EC # APPRVD. DATE 08-004181 PJD 20FEB08

CUSTOMER DRAWING

TEST SPECIFICATIONS:

INDUCTANCE: 5.04 mH NDMINAL CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND: 0.0044 μF ±20% LINE TO LINE: 0.741 μF±20% 470K ∩ DISCHARGE RESISTOR:

L/G AND L/L I.R.

NO DISCHARGE RESISTOR: 6000M₁ (MIN.) @ 100VDC,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 2250 VDC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

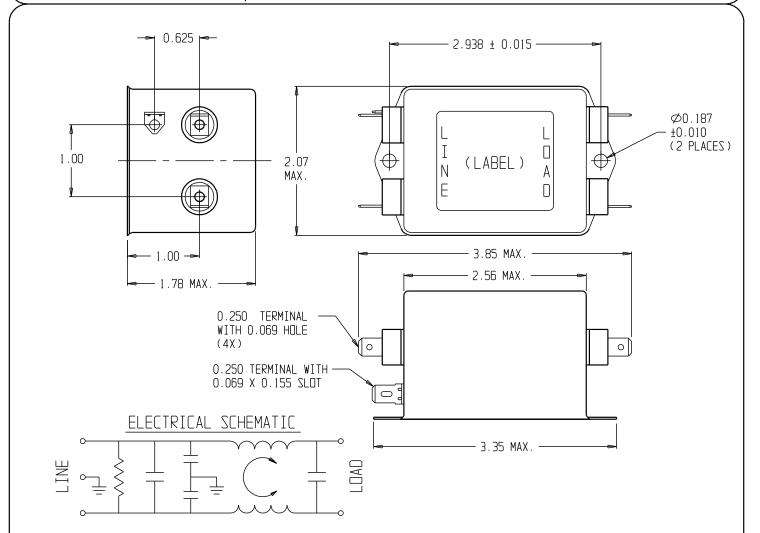

SHALL COMPLY WITH TYCO ELECTRONICS 230-702 SPECIFICATION FOR HAZARDOUS SUBSTANCES

| 50A-50A(MINIMUM) INSERTION LOSS | | | | | | | | | | | | THIRD ANGLE |
|---------------------------------|------|------|------|-----|-----|-----|-----|----|----|----|----|---|
| FREQUENCY MHz | . 05 | . 10 | . 15 | .50 | 1.0 | 2.0 | 5.0 | 10 | 20 | 30 | } | PROJECTION Tyco Electronics UNLESS OTHERWISE SPECIFIED, CORCOM PRODUCTS, 620 S. BUTTERFIELD RD. MUNOELEIN IL 60060 |
| | 2, | 20 | 71 | 45 | 47 | 4.1 | 42 | 40 | 47 | | | TOLERANCE TO BE ±.025 MATERIAL & FINISH: AS SUPPLIED POWER LINE FILTER |
| dB | 21 | 28 | וצ | 45 | 43 | 41 | 42 | 42 | 4/ | 57 | | 6-PROPORTAL AND PROPERTIES THE TYPE FOR THE STREET OF THE |
| DIFF. dB | 15 | 13 | 20 | 61 | 76 | 88 | 70 | 72 | 64 | 50 | l, | TYCO ELECTRONICS CORPORATION AND ITS WORLDWIDE SUBSIDIARIES SCALE: NTS DATE: AND AFFILIATES. IT HAN MOT BE DISCLOSED TO MANYONE OTHER THAN TYCO ELECTRONICS PRESONEL, WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION. FROM TYCO ELECTRONICS CORPORATION. FROM TYCO ELECTRONICS CORPORATION. ARRISBURG, PENNSYLVANIA USA CATALOG ND. RET ORIG: 15 ERK 1 3 |