


[Home](#) > Product Details

CBS35048

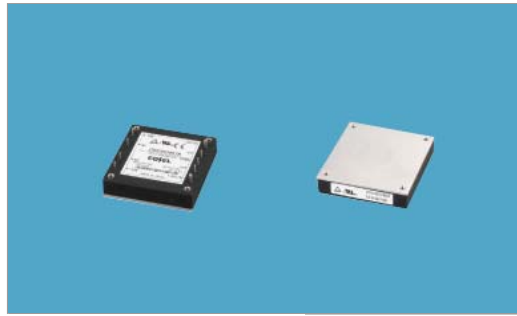

Features

- Compact DC-DC Converter, "HALF BRICK" which has been standard size for Telecommunication Market
- High efficiency
- High density
- High reliability : not built-in aluminum and tantalum electrolytic capacitor
- Built-in Remote ON/OFF
- Mounting hole (M3 tapped)
- Built-in Over Current Protection
- Built-in Over Voltage Protection
- Built-in Thermal Protection
- RoHS Compliant

Safety Agency Approvals


UL60950, C-UL (CSA60950) recognized, TUV approved

CE Markings

Low Voltage Directive

5 year warranty(refer to Instruction Manual)

Model	Input Voltage [V]	Output Wattage [W]	DC Output [V/A]
CBS3504812	DC 36 - 76	348	12V 29A
CBS3504824	DC 36 - 76	348	24V 14.5A
CBS3504828	DC 36 - 76	350	28V 12.5A
CBS3504832	DC 36 - 76	352	32V 11A

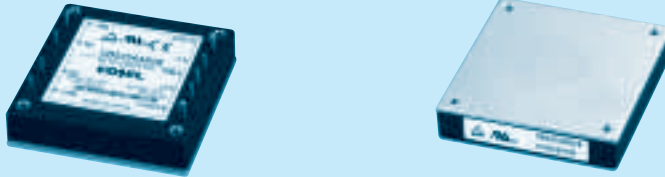

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Input voltage
24:DC20 - 36V
48:DC36 - 76V
- ⑤ Output voltage
- ⑥ Optional
R :with Remote ON/OFF
Positive logic control
T :with Mounting hole
φ 3.4 thru

MODEL	CBS3502412	CBS3502424	CBS3502428	CBS3502432	CBS3504812	CBS3504824	CBS3504828	CBS3504832
MAX OUTPUT WATTAGE[W]	300	348	350	352	348	348	350	352
DC OUTPUT	12V 25A	24V 14.5A	28V 12.5A	32V 11A	12V 29A	24V 14.5A	28V 12.5A	32V 11A

SPECIFICATIONS

	MODEL	CBS3502412	CBS3502424	CBS3502428	CBS3502432	CBS3504812	CBS3504824	CBS3504828	CBS3504832	
INPUT	VOLTAGE[V]	DC20 - 36				DC36 - 76				
	CURRENT[A]	*1 14.5typ	16.7typ	16.4typ	16.5typ	8.33typ	8.15typ	8.10typ	8.15typ	
	EFFICIENCY[%]	*1 86typ	87typ	89typ	89typ	87typ	89typ	90typ	90typ	
OUTPUT	VOLTAGE[V]	12	24	28	32	12	24	28	32	
	CURRENT[A]	25	14.5	12.5	11	29	14.5	12.5	11	
	LINE REGULATION[mV]	24max	48max	56max	64max	24max	48max	56max	64max	
	LOAD REGULATION[mV]	24max	48max	56max	64max	24max	48max	56max	64max	
	RIPPLE[mVp-p]	-20 to +100°C *2	120max	150max	180max	180max	120max	150max	180max	180max
		-40 to -20°C *2	150max	180max	220max	220max	150max	180max	220max	220max
		0 to 15%Load *2	240max	300max	360max	360max	240max	300max	360max	360max
	RIPPLE NOISE[mVp-p]	-20 to +100°C *2	150max	180max	220max	220max	150max	180max	220max	220max
		-40 to -20°C *2	200max	250max	280max	280max	200max	250max	280max	280max
		0 to 15%Load *2	300max	360max	440max	440max	300max	360max	440max	440max
	TEMPERATURE REGULATION[mV]	0 to +65°C	120max	240max	280max	320max	120max	240max	280max	320max
		-40 to +100°C	240max	480max	560max	640max	240max	480max	560max	640max
	DRIFT[mV]	*3 40max	90max	90max	120max	40max	90max	90max	120max	
START-UP TIME[ms]	200max (DCIN 24V, Io=100%)				200max (DCIN 48V, Io=100%)					
OUTPUT VOLTAGE ADJUSTMENT RANGE[V] *4	Fixed (TRM pin open), adjustable by external resistor									
	7.2 - 13.2	14.4 - 26.4	16.8 - 30.8	25.6 - 35.2	7.2 - 13.2	14.4 - 26.4	16.8 - 30.8	25.6 - 35.2		
OUTPUT VOLTAGE SETTING[V] *1	11.88 - 12.12	23.76 - 24.24	27.72 - 28.28	31.68 - 32.32	11.88 - 12.12	23.76 - 24.24	27.72 - 28.28	31.68 - 32.32		
OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically									
OVERVOLTAGE PROTECTION[V]	13.80 - 16.80	27.60 - 33.60	32.20 - 39.20	36.80 - 44.80	13.80 - 16.80	27.60 - 33.60	32.20 - 39.20	36.80 - 44.80		
REMOTE SENSING	Provided									
REMOTE ON/OFF	Provided (Negative logic L : ON, H : OFF)									
ISOLATION	INPUT-OUTPUT	DC1,500V or AC1,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min(20±15°C)								
	INPUT-BASE PLATE	DC1,500V or AC1,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min(20±15°C)								
	OUTPUT-BASE PLATE	AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (20±15°C)								
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE	-40 to +100°C (On aluminum base plate), 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max								
	STORAGE TEMP.,HUMID.AND ALTITUDE	-40 to +100°C, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max								
	VIBRATION	10 - 55Hz, 49.0m/s ² (5G), 3minutes period, 60minutes each along X, Y and Z axis								
	IMPACT	196.1m/s ² (20G), 11ms, once each along X, Y and Z axis								
SAFETY	AGENCY APPROVALS	UL60950-1, C-UL, EN60950-1								
OTHERS	CASE SIZE/WEIGHT	57.9×12.7×61.0mm (W×H×D) / 83g max								
	COOLING METHOD	Conduction cooling (e.g. heat radiation from the aluminum base plate to the attached heat sink)								



*1 At rated input(DC24V,DC48V), rated load, and aluminum base plate temperature 25°C.

*2 Ripple and ripple noise is measured by using measuring board with recommended capacitor Co & the film capacitor 0.1 μF. Refer to the manual.

*3 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.

*4 When the input voltage is in the range of DC20 - 22V, DC36 - 40V, output voltage is limited. Refer to the manual.

External view

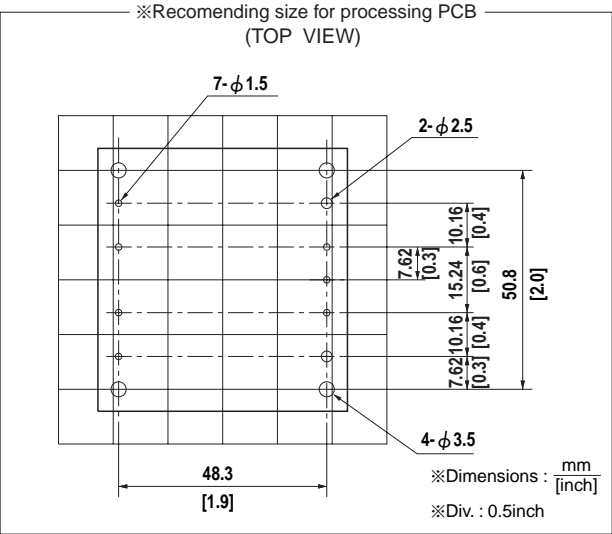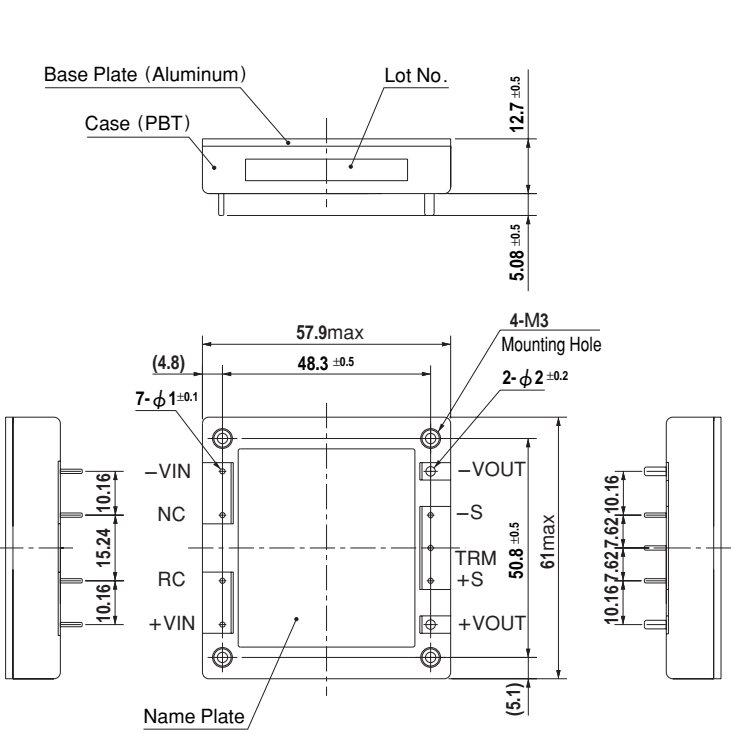

- ※Weight : 83g or less
- ※Tolerance : ±0.3
- ※Case : PBT
- ※Base Plate: Aluminum
- ※Dimensions in mm.
- ※Mounting hole screwing torque : 0.4N•m(5.0kgf•cm)max