

Voice Guidance LSI

■ Overview

The S1V3G340 is an LSI incorporating high-compression, high-quality audio decoding functions, external SPI flash memory interface, and a DA converter, making it ideal for use in voice guidance products. The voice data creation tool for EPSON voice guidance LSI allows easy creation of high-quality voice data without the need for studio recording. Use of external SPI flash memory allows easy interchanging of voice data. Additional voice data can be transferred from a host when required. General-purpose output ports are provided to allow flexible system design. All functions are controlled by commands via a serial interface for easy addition to any existing system incorporating a host. The S1V3G340 offers pin compatibility with the S1V3034x Series* facilitating substitution to suit system configurations.

The S1V3G340 will help users reduce time-to-market for products incorporating built-in voice guidance functions.

* External parts differ from S1V3034x Series devices.


■ Features

- **Audio playback**
 - High-compression, high-quality audio decoder (proprietary Epson data format)
 - Bitrate: 40 kbps, 32 kbps, 24 kbps, 16 kbps
 - Sampling rate: 16 kHz
- **Sequencer function (phrase interval setting)**
 - Sequence setting for up to 64 phrases (unlimited combinations)
 - Variable phrase interval delay setting: 0 ms or 20 ms to 2,047 ms (in 1 ms steps)
- **External SPI flash memory interface**
 - Clock synchronized serial interface (SPI)
 - Maximum approx. 128 mins (16 Mbytes)
- **GPO**
 - 7 pins
- **Host interface**
 - Clock synchronized serial interface, supporting UART and I2C
 - Command control
- **High-quality 16-bit DA converter**
 - Sampling rate (f_s): 16 kHz
 - Input bits: 16 bits
- **Clock**
 - Clock input: 32.768 kHz or 12.288 MHz
 - Crystal oscillator: 32.768 kHz
- **Package**
 - QFP-52 pin (10 mm × 10 mm) 0.65 mm pin pitch
- **Power supply voltage**
 - 2.2 V to 5.5 V (single power supply)

■ Standard application system

The S1V3G340 standard application system is configured as shown in the diagram below. The S1V3G340 is command-controlled by the host using a messaging protocol via the serial interface.

Controlled by commands sent from the host via the serial interface after power-on resetting, the S1V3G340 outputs voice audio while internally decoding and processing internal or streamed (via host command transfer) compressed audio data.

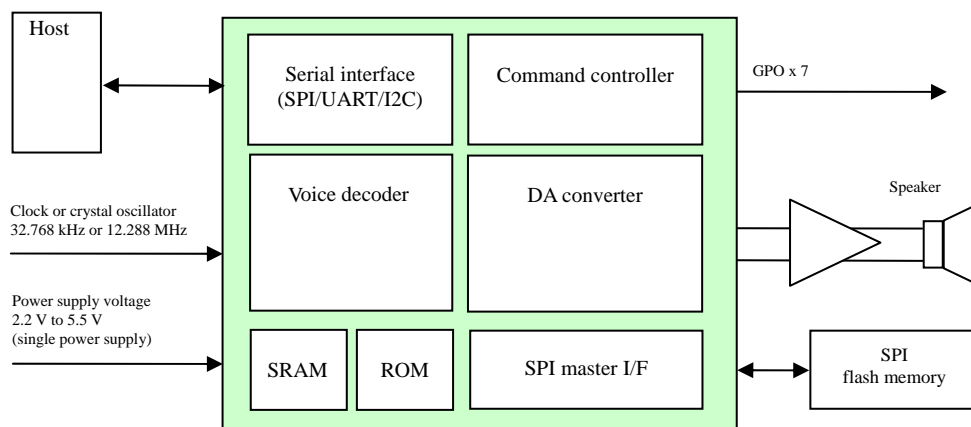



S1V3G340

■ Development Tools



- Evaluation board*1
- Audio data creation tool*2
- Sample programs

[Voice data creation tool overview]

Step 1: Voice guidance registration Step 2: Pronunciation editing

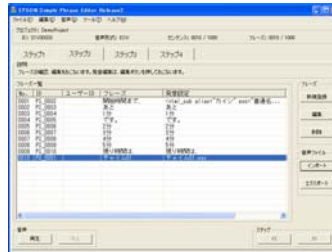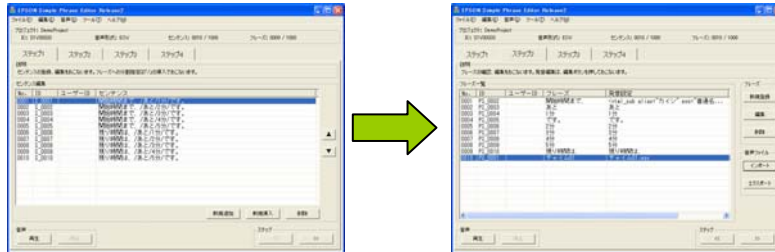

Step 3: Phrase editing Step 4: ROM data production

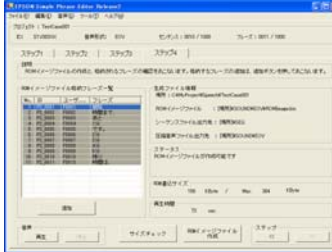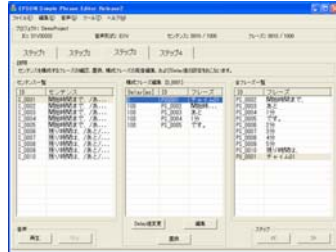

- Supported languages : English, Japanese, Korean (all female voices)
In planning stage : Spanish, Chinese

*1 For evaluation of S1V3G340 use S1V3S344 Evaluation Board incorporating 512-KB flash memory.

*2 The audio data creation tool uses PENTAX "VoiceText" voice synthesis technology. "VoiceText" is a registered trademark of Voiceware Co., Ltd.

Companies and product names included here are registered trademarks or trademarks.

NOTICE:

No part of this material may be reproduced or duplicated in any form or by any means without the written permission of Seiko Epson. Seiko Epson reserves the right to make changes to this material without notice. Seiko Epson does not assume any liability of any kind arising out of any inaccuracies contained in this material or due to its application or use in any product or circuit and, further, there is no representation that this material is applicable to products requiring high level reliability, such as, medical products. Moreover, no license to any intellectual property rights is granted by implication or otherwise, and there is no representation or warranty that anything made in accordance with this material will be free from any patent or copyright infringement of a third party. This material or portions thereof may contain technology or the subject relating to strategic products under the control of the Foreign Exchange and Foreign Trade Law of Japan and may require an export license from the Ministry of Economy, Trade and Industry or other approval from another government agency.

©SEIKO EPSON CORPORATION 2009, All rights reserved.

SEIKO EPSON CORPORATION

SEMICONDUCTOR OPERATIONS DIVISION

IC Sales Dept.

IC International Sales Group

421-8, Hino, Hino-shi, Tokyo 191-8501, JAPAN

Phone: +81-42-587-5313 FAX: +81-42-587-5116

■ EPSON Electronic devices Website

http://www.epson.jp/device/semicon_e/

Document Code: 411675900
First Issue March 2009 in JAPAN ©