

# 3.2x2.5mm 32.768 kHz SMD Oscillator


(former F32K Series) DATASHEET

O3HF

- HCMOS Output
- Stability of  $-170 \sim +10$  PPM
- Temperature Range of -40°C to +85°C

ELECTRICAL CHARAC	TERISTICS		
PARAMETERS	MAX (unless otherwise noted)		
Frequency Range (Fo)	32.768kHz		
Temperature Range			
Operating (TOPR)	$-40 \sim +85^{\circ}C$		
Storage (T <sub>STG</sub> )	-55 ~ +125°C		
Frequency Tolerance @ 25°C	$+5 \pm 20$ PPM		
Frequency Stability, ref. 25°C	$-170 \sim +10 PPM$		
Samela Valtara (V)	3.3V±10% (Std.)		
Supply Voltage (V <sub>DD</sub> )	1.5V~5.5V (Usable)		
Input Current (IDD) (no load)	1.5 uA		
Output Symmetry (50% V <sub>DD</sub> )	$40\% \sim 60\%$		
Rise/Fall Time $(T_R/T_F)$	200 nS		
(20%/80% V <sub>DD</sub> Levels)	200 IIS		
Output Voltage (VoL)	0.4V Max		
(Vон)	VDD – 0.4V Min		
Output Load (HCMOS)	15 pF		
Start-up Time (Ts)	1 Second		
$(VDD) = 1.5 \sim 5.5V, Ta = -40^{\circ}C \sim +85^{\circ}C$			
Maximum Soldering Temp / Time	260°C / 10 Seconds		
Moisture Sensitivity Level (MSL)	1		
Termination Finish	Au over Ni		
Seal Method	Seam Seal		
Lead (Pb) Free	Yes		
ROHS/REACH Compliant	Yes		

ENABLE / DISABLE FUNCTION				
Pin1	Output (pin 3)			
OPEN <sup>1</sup>	Active			
'1' Level $V_{IH} \ge 80\% V_{DD}$	Active			
'0' Level $V_{IL} \leq 20\% V_{DD}$	High Z			

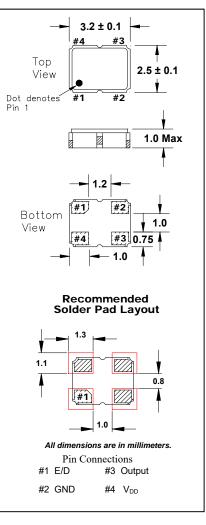

<sup>1</sup> An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

#### Notes:

\*A 0.01 $\mu$ F capacitor should be placed between  $V_{DD}$  (Pin 4) and GND (Pin2) to minimize power supply line noise.

\*Dimensional drawing is for reference to critical specifications defined by size measurements.

Certain non-critical visual attributes, such as side castellations, reference pin shape, etc. may vary

224	Title / Description: O3HF SERIES STANDARD SPECIFICATIONS				
FUX	Drawing Number: 100565	Size: A			
FOX	Part Number:	Cage: 61429			
© Copyright 2019 Fox Electronics. All rights reserved	Draftsperson: MAJ	Approved: BEC	Revision Date: 4/11/2019		



# 3.2x2.5mm 32.768 kHz SMD Oscillator

O3HF

		Tape Sp	oecificat	ions (m	illimeter	·s)	Reel Specifications (millimeters			ters)	ers)			
А	В	C	D	E	F	Reel Qty. Options		G	Н	Ι	J	K	L	Μ
Φ1.5	4.0	4.0	3.5	8.0	1.4	-T3 = 3,000* *default -T1 = 1,000		2.5	Φ13	Ф22	Ф60	Ф178	8.0	1.6
	000	000	A 0 0 0 0	_			L	F		H Contraction	G	120*	- L -	ĸ

Available Options & Part Identification Example: <u>F O3HF C Y M 0.032768</u>								
F	O3HF	С	Y	М	0.032768			
Fox	Model Number	Voltage C = 3.3V ± 10%	Stability Y = -170 ~ +10PPM	Operating Temperature M = -40 to +85°C	Frequency (MHz)			



### **Corporate Headquarters** 5570 Enterprise Parkway Fort Myers, FL 33905 http://www.FOXONLINE.com

### Sales

1-888-GET-2-FOX (1-888-438-2369)

#### Tech Support http://www.FOXONLINE.com/email

or 1-239-693-0099 http://www.FOXONLINE.com/repdisty

**Product use:** Fox Electronics reserves the right to modify the products and/or specifications described herein at any time and at Fox Electronics' sole discretion. All information in this document, including descriptions of product features and performance, is subject to change without notice. Performance specifications and the operating parameters of the described products are determined in the independent state and are not guaranteed to perform the same way when installed in customer products. The information contained herein is provided without representation or warranty of any kind, whether express or implied, including, but not limited to, the suitability of Fox Electronics' products for any particular purpose, an implied warranty of merchantability, or non-infringement of the intellectual property rights of others. This document is presented only as a guide and does not convey any license under intellectual property rights of Fox Electronics or any third parties.

Fox Electronics' products are not intended for use in applications involving extreme environmental conditions or in life support systems or similar devices where the failure or malfunction of a Fox Electronics product can be reasonably expected to significantly affect the health or safety of users. Anyone using a Fox Electronics product in such a manner does so at their own risk, absent an express, written agreement by Fox Electronics.

Fox Electronics and the Fox logo are registered trademarks of Fox Electronics. Product specification is subject to change without notice. Other trademarks and service marks used herein, including protected names, logos and designs, are the property of Fox Electronics or their respective third party owners.

24	Title / Description: O3HF SERIES STANDARD SPECIFICATIONS			
FÖX	Drawing Number: 100565	Size: A		
FOX	Part Number:	Cage: 61429		
© Copyright 2019 Fox Electronics. All rights reserved	Draftsperson: MAJ	Approved: BEC	Revision Date: 4/11/2019	