



TO	FROM	DATE	TIME	REMARKS

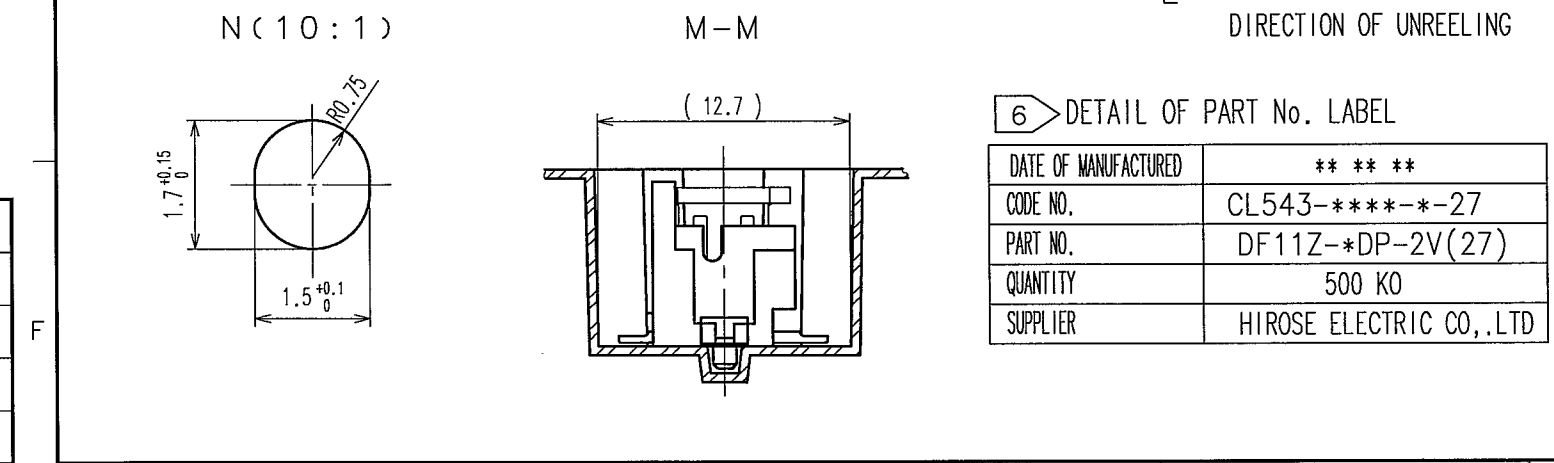

PART No.	CONTACT	E	F	G	H	J	K
DF11Z- 4DP-2V(27)	4	24.0	—	11.5	13.2	24.4	PS
DF11Z- 6DP-2V(27)	6	24.0	—	11.5	15.2	24.4	A-PET
DF11Z- 8DP-2V(27)	8	24.0	—	11.5	17.2	24.4	PS
DF11Z-10DP-2V(27)	10	32.0	28.4	14.2	19.2	32.4	PS
DF11Z-12DP-2V(27)	12	32.0	28.4	14.2	21.2	32.4	PS
DF11Z-14DP-2V(27)	14	44.0	40.4	20.2	23.2	44.4	PS
DF11Z-16DP-2V(27)	16	44.0	40.4	20.2	25.2	44.4	A-PET
DF11Z-18DP-2V(27)	18	44.0	40.4	20.2	27.2	44.4	A-PET
DF11Z-20DP-2V(27)	20	44.0	40.4	20.2	29.2	44.4	PS
DF11Z-22DP-2V(27)	22	44.0	40.4	20.2	31.2	44.4	PS
DF11Z-24DP-2V(27)	24	56.0	52.4	26.2	33.2	56.4	PS
DF11Z-26DP-2V(27)	26	56.0	52.4	26.2	35.2	56.4	A-PET
DF11Z-28DP-2V(27)	28	56.0	52.4	26.2	37.2	56.4	A-PET
DF11Z-30DP-2V(27)	30	56.0	52.4	26.2	39.2	56.4	PS
DF11Z-32DP-2V(27)	32	56.0	52.4	26.2	41.2	56.4	PS
DF11Z-40DP-2V(27)	40	72.0	68.4	34.2	49.2	72.4	PS

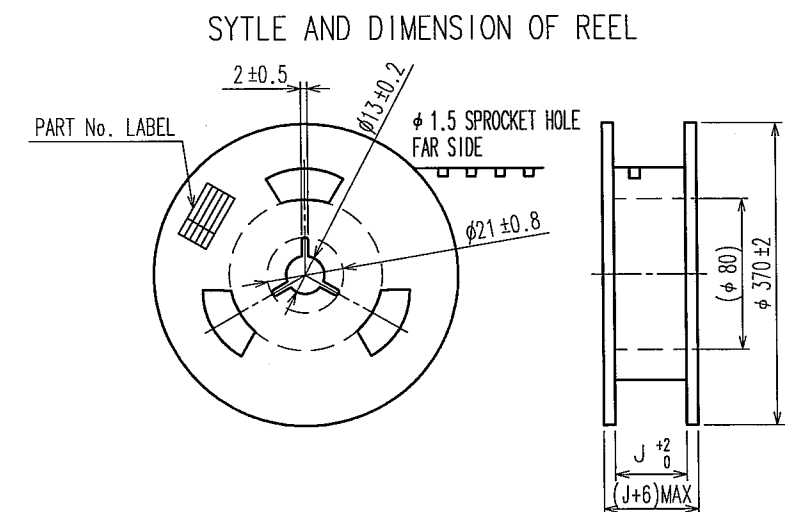

- NOTES 4 1 REEL:500 CONNECTORS.
- 5 AT THE BEGINNING OF REEL ,15 COMPONECTS SHALL BE EMPTY,
AT THE END OF THE REEL, 10 COMPONENTS SHALL BE EMPTY.
- 6 DETAIL OF PART NO.LABEL IS WRITTEN IN JAPANESE.
- 7 THE REEL IS POLYETHYLENE PACKAGED WITH AN DRY AGENT
INSIDE FOR MOISTURE-PROOF PACKAGING.
- 8 FOR THE STORAGE OF 168 HOURS OR MORE AFTER OPENING THE
PACKAGE, KEEP THE PRODUCTS UNDER MOISTURE PROOF CONDITIONS.
- 9 EXCEPT ON THE MATING SURFACE, COMPONENT INFLATION DOES
NOT AFFECT THE PRODUCTS PERFORMANCE.

6> DETAIL OF PART No. LABEL	
DATE OF MANUFACTURED	** ** *
CODE NO.	CL543-*****-27
PART NO.	DF11Z-*DP-2V(27)
QUANTITY	500 KO
SUPPLIER	HIROSE ELECTRIC CO.,LTD

CODE NO. (OLD) CL		DRAWN M. Matsuo '05.08.03	DESIGNED I. Denpouya '05.08.11	CHECKED H. Umehara '05.08.11	APPROVED T. Oma '05.08.11	RELEASED . .	
 SCALE 5 : 1 UNITS mm		DRAWING NO. EDC3-306017-04  HIROSE ELECTRIC CO., LTD		PART NO. DF11Z-*DP-2V(27) CODE NO. CL543			2