


## CoolStar® 3445 Designer LED Star Cooler ø34.5mm

### Features & Benefits

- For narrow beam compact spot lights from 600 to 1,200 lumen
- Thermal resistance range Rth 8.13°C/W
- Modular design with mounting holes foreseen for a wide range of LED modules and COB's:
  - All Zhaga Book 11 LED engines and holders
  - Bridgelux V10, V13, V6 HD
  - Citizen CitiLED CLU02J, CLU7B2, CLU7A2
  - Cree XLamp CMT1407
  - Lumileds Luxeon 1202s, 1202
  - Nichia NTCWT012B, NTCWS024B
  - Philips Fortimo SLM 1202 Gen6
  - Seoul Semiconductor SAWx0661A, SAWx1062A, SAWx1063A, SAWS0661A, SAWS1063A, ZC4/6
  - Tridonic Module SLE G7 ADV 09mm
  - Xicato XOB04, XOB06
- Designer series with high end looks
- Diameter 34.5mm - Standard height 45mm  
Other heights on request
- Black anodized or white electro-coating finishing

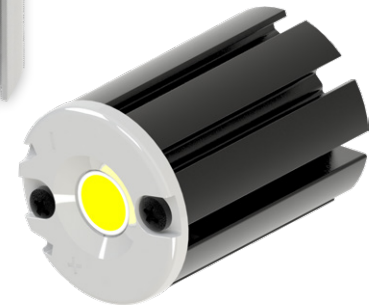

**Zhaga**  
Book 11

### Order Information

#### LED Holders

**BENDER  
+WIRTH**

**BJB**

**IDEAL**

**TE**  
connectivity

#### LED Brands

bridgelux

**CITIZEN**  
Micro-HumanTech

**CREE**

Lit by  
**LUMILEDS**

**LUMINUS**

**NICHIA**

**OSRAM**

**LED** Light for you  
powered by OSRAM  
CERTIFIED PARTNER

**PHILIPS**

**SEOUL**  
SEOUL SEMICONDUCTOR

**TRIDONIC**

**Xicato**

Example : CoolStar® Black 3445

CoolStar® **1** 3445

- 1 Finishing Color  
Black - Black anodized  
White - White electro-coating

CoolStar® 3445 is designed in this way that you can mount LED modules from various manufacturers on the same LED cooler

Simple mounting with M3 screws

Recommended screw force 6lb/in

Screws are available from MechaTronix

## CoolStar® 3445 Designer LED Star Cooler ø34.5mm

### Product Details



#### Model n°

**CoolStar® 3445**

Dimension (mm) <sup>*1</sup>	ø34.5 x h45
Volume (mm <sup>3</sup> )	23639
Cooling Surface (mm <sup>2</sup> )	14237
Weight (gr)	63.8
Thermal Resistance (°C/W) <sup>*2</sup>	8.13
Power Pd (W) <sup>*3</sup>	6
Heat Sink Material	AL6063-T5

<sup>\*1</sup> 3D files are available in ParaSolid, STP and IGS on request

<sup>\*2</sup> The thermal resistance Rth is determined with a calibrated heat source of 10mm x 10mm central placed on the heat sink, Tamb 40° and an open environment. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C  
The thermal resistance of a LED cooler is not a fix value and will vary with the applied dissipated power Pd

<sup>\*3</sup> Dissipated power Pd. Reference data @ heat sink to ambient temperature rise Ths-amb 50°C  
The maximal dissipated power needs to be verified in function of required case temperature Tc or junction temperature Tj and related to the estimated ambient temperature where the light fixture will be placed  
Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module

To calculate the dissipated power please use the following formula:  $Pd = Pe \times (1 - \eta_L)$

Pd - Dissipated power

Pe - Electrical power

$\eta_L$  = Light efficiency of the LED module

#### Notes:

- MechaTronix reserves the right to change products or specifications without prior notice.
- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MechaTronix.