

UG0882
User Guide
PolarFire SoC FPGA ICICLE Kit



a  MICROCHIP company

Microsemi Headquarters

One Enterprise, Aliso Viejo,
CA 92656 USA

Within the USA: +1 (800) 713-4113

Outside the USA: +1 (949) 380-6100

Sales: +1 (949) 380-6136

Fax: +1 (949) 215-4996

Email: sales.support@microsemi.com

www.microsemi.com

©2020 Microsemi, a wholly owned subsidiary of Microchip Technology Inc. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

About Microsemi

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (Nasdaq: MCHP), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Learn more at www.microsemi.com.

Contents

1	Revision History	1
1.1	Revision 1.0	1
2	Getting Started	2
2.1	Kit Contents	2
2.2	Block Diagram	3
2.3	Web Resources	3
2.4	Board Overview	3
2.4.1	Form Factor	4
2.4.2	FPGA Bank IO Assignment for Individual Interfaces	4
2.5	Handling the Board	6
2.6	Operating Temperature	6
2.7	Powering Up the Board	6
3	Installation and Settings	7
3.1	Software Settings	7
3.2	Hardware Settings	7
3.2.1	Jumper Settings	7
3.2.2	Power Supply LEDs	8
3.2.3	Test Points	8
3.3	Power Sources	10
4	Board Components and Operations	12
4.1	LDDR4 Memory Interface	12
4.2	SPI Serial Flash	12
4.3	eMMC and SDIO Interface	12
4.3.1	eMMC	12
4.3.2	SD Card	12
4.4	High Speed Transceivers Configuration	13
4.4.1	Transceivers Block Allocations	13
4.4.2	PCIx16 Connector	13
4.5	Communication Interfaces	13
4.5.1	Ethernet – SGMII Interface	13
4.5.2	CAN Interface	13
4.5.3	USB OTG	13
4.6	Expansion Capabilities	13
4.6.1	Raspberry Pi 4 Connector	13
4.6.2	mikroBUS Connector	13
4.7	Voltage and Current Monitoring	14
4.8	GPIO	14
4.8.1	Switches and LEDs	14
4.8.2	LEDs	14
4.9	User Interface	14
4.9.1	USB to UART Interface	14
4.10	Mux for JTAG Selection	14
4.11	Programming Scheme	15
4.12	System Reset	15
4.13	50-MHz Oscillator	15

5	Pin List	16
6	Board Component Placement	17
7	Demo Design	19
8	Appendix: Programming PolarFire SoC FPGA Using the On-Board FlashPro6 . . .	20

Figures

Figure 1	PolarFire SoC ICICLE Kit Block Diagram	3
Figure 2	PolarFire SoC ICICLE Kit	4
Figure 3	Voltage Rails on PolarFire SoC ICICLE Kit	11
Figure 4	SPI Flash Interface	12
Figure 5	PolarFire SoC Programming Scheme Block Diagram	15
Figure 6	Reset Circuit	15
Figure 7	50-MHz Clock Oscillator	15
Figure 8	Silkscreen Top View	17
Figure 9	Silkscreen Bottom View	18

Tables

Table 1	Kit Contents	2
Table 2	FPGA Bank Assignment	4
Table 3	PolarFire SoC ICICLE Kit Components	5
Table 4	Power Measurements	6
Table 5	Jumper Settings	7
Table 6	Power Supply LEDs	8
Table 7	Test Points	8
Table 8	I/O Voltage Rails	10
Table 9	Power Regulators	11
Table 10	Mux for JTAG Selection	14

1 Revision History

The revision history describes the changes that were implemented in the document. The changes are listed by revision, starting with the most current publication.

1.1 Revision 1.0

The first publication of this document.

2 Getting Started

The Microsemi PolarFire® SoC FPGA ICICLE Kit (MPFS250T-FCVG484EES) is an RoHS-compliant, cost-optimized kit with general-purpose interfaces that enables you to evaluate features of the PolarFire SoC family of FPGAs. The PolarFire SoC ICICLE Kit supports the following interfaces:

- PCI Express Root Port
- eMMC (DDR Model / HS200 / HS400)
- SD card
- LPDDR4
- SGMII
- I2C-Power Monitor
- USB
- UART
- CAN
- mikroBUS
- 40 pin Raspberry Pi 4 interface connector

The PolarFire SoC device available on ICICLE Kit is programmed using the on-board FlashPro6 programmer. The on-board FlashPro6 programmer is used to develop and debug embedded applications using SoftConsole, Identify, or SmartDebug.

Note: Embedded FlashPro6 is enabled only for the production kits. For PROTO kits, the device can be programmed using an external FlashPro 4, 5, or 6 programmer.

2.1 Kit Contents

The following table lists the contents of the PolarFire SoC ICICLE Kit.


Table 1 • Kit Contents

Item	Quantity
PolarFire SoC FPGA ICICLE Kit ES featuring the MPFS250T-FCVG484EESEES device with 254K logic elements	1
12 V/5 A wall-mounted power adapter	1
Ethernet cable	1
USB 2.0 micro AB connector for UART interface to PC	1
Quickstart card	1

2.2 Block Diagram

The following block diagram shows the key components of the PolarFire SoC ICICLE Kit.

Figure 1 • PolarFire SoC ICICLE Kit Block Diagram

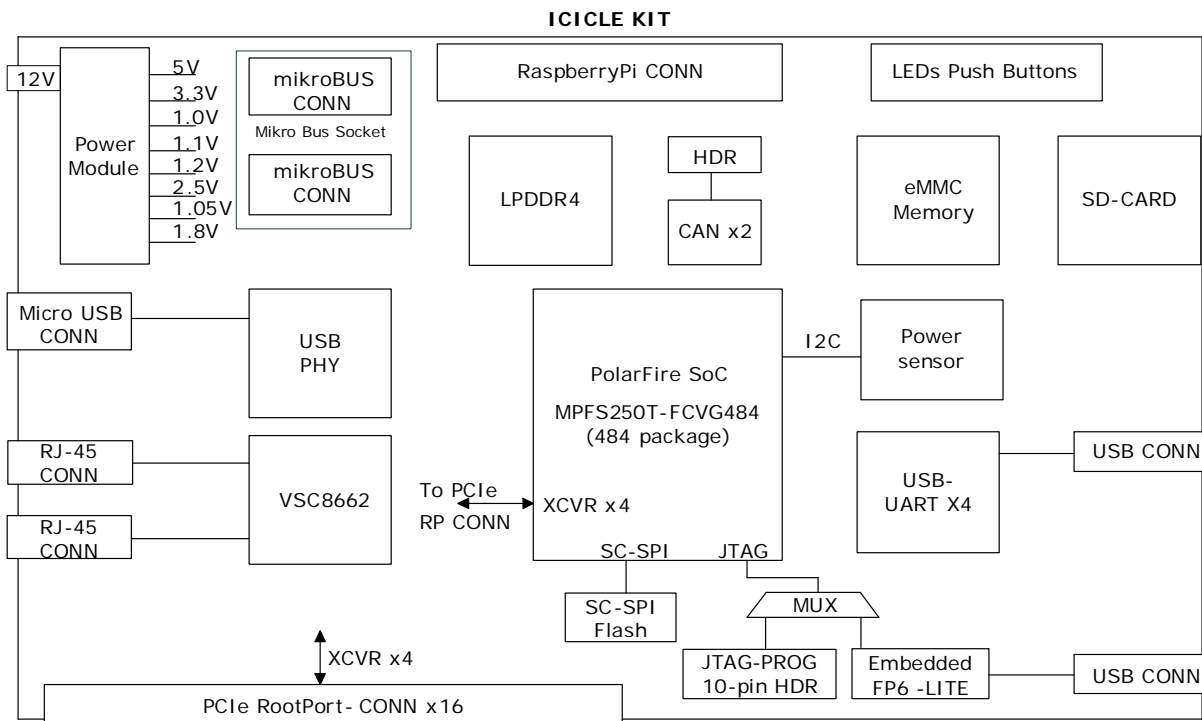

2.3 Web Resources

For more information about the PolarFire SoC ICICLE Kit, see [PolarFire SoC Page](#).


2.4 Board Overview

The PolarFire SoC ICICLE Kit features a MPFS250T-FCVG484EES FPGA with the following capabilities:

- VSC8662 with two RJ45 connectors for 10/100/1000 Mbps Ethernet
- LPDDR4 memory
- Power monitor module
- PCIe Root port
- One SPI flash device
- 40 pin Raspberry Pi 4 interface connector
- mikroBUS expansion port

The following illustration highlights various components of the PolarFire SoC ICICLE Kit.

Figure 2 • PolarFire SoC ICICLE Kit

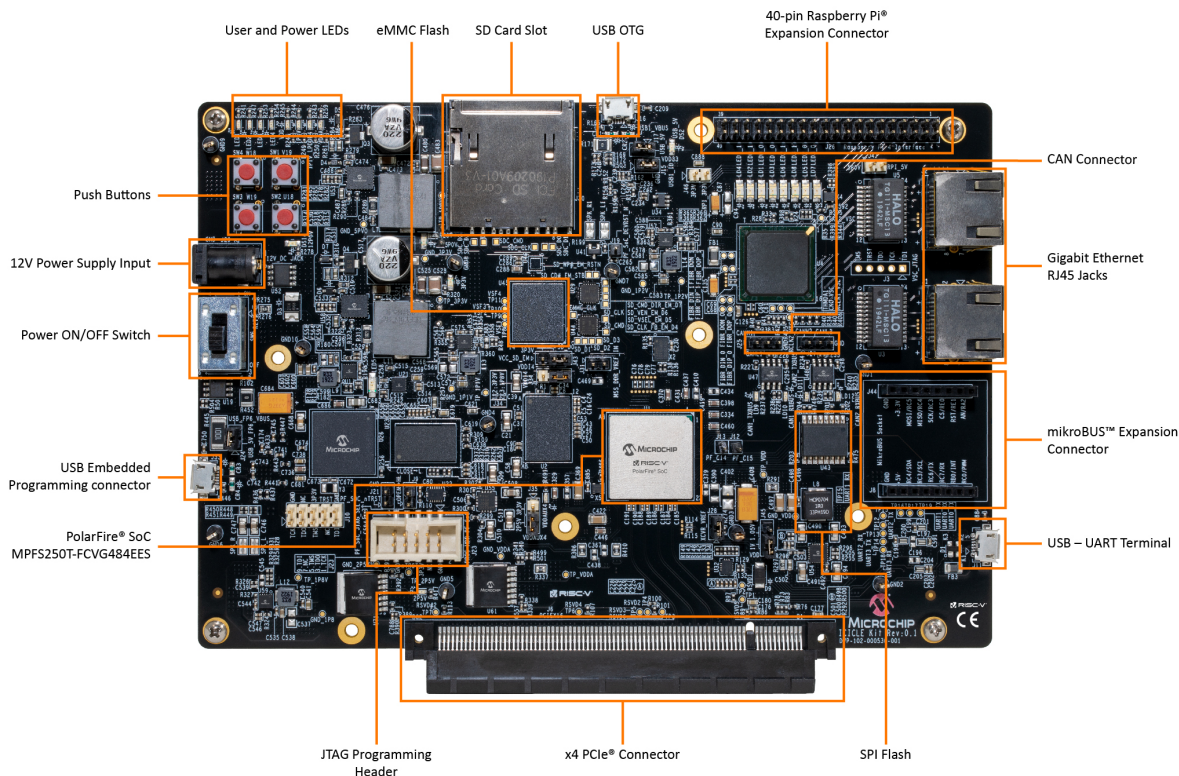

2.4.1 Form Factor

PolarFire SoC ICICLE Kit form factor is 7.2 x 4.95 inches.

2.4.2 FPGA Bank IO Assignment for Individual Interfaces

Table 2 • FPGA Bank Assignment

Interfaces	FPGA Bank Allocation
LPDDR4	B6
SGMII	B5, B1, B9, and B2
PCI	XCVRO, B1, B9
mikroBUS	B1, B9, and B2
USB-UART (x4)	B1, B9
USB interface	B2
SC-SPI_FLASH	B3
JTAG Header	B3
eMMC/SDIO	B4
CAN	B2, B1
Raspberry Pi 4 interface connector	B1
User defined LEDs/Switches	B0

The following table lists the important components of the PolarFire SoC ICICLE Kit.

Table 3 • PolarFire SoC ICICLE Kit Components

Component	Label on Board	Description
Featured Device		
PolarFire SoC FPGA		MPFS250T-FCVG484EES Extended Commercial (0°C to 100°C) temperature support.
Power Supply and Monitoring		
12 V power supply input	J29	The board is powered by a 12 V power source using an external +12 V/5 A DC jack.
ON/OFF switch	SW6	Power ON/OFF switch from +12 V external DC jack.
Clocks		
On-board 50-MHz clock oscillator	X5	50-MHz clock oscillator with single-ended output.
OSC	X2	125-MHz oscillator (differential LVDS output) which is the input to the MSS Reference clk.
FPGA Programming and Debugging		
SPI flash	U43	1 Gb Micron MT25QL01GBBB8ESF-0SIT SPI flash memory device connected to SPI pins on bank3 of the PolarFire SoC device.
JTAG programming header	J23	Header to program and debug the PolarFire SoC device using FlashPro. The appropriate programmer must be selected in the FlashPro software. Note: For PROTO kits, the device can be programmed using an external FlashPro 4, 5, or 6 programmer.
Embedded FlashPro 6	U26	On board programming.
Expansion Interfaces		
mikroBUS	J44, J8	mikrobus connector.
Raspberry Pi 4	J26	Raspberry Pi 4 interface connector.
PCIe X 16	J6	PCI Express Root port connector.
Communication Interfaces		
1000Base-X Gigabit Ethernet Transceiver RJ45 conn-2	J1, J2	Ethernet (RJ45) jack with external magnetics interfacing with VSC8662 in SGMII mode.
USB-UART	J11	USB Micro AB connector.
CAN	J25, J27	CAN Headers.
USB-ULPI	J16	USB Micro AB connector.
Memory Chips		
LPDDR4	U2	MT53D512M32D2DS-053 WT:D TR is used for LPDDR4 interface. Memory size: 16 Gb.
eMMC	U45	SDINBDG4-8G eMMC is used for this interface. Memory size: 8 GB.
SD card	J30	SD connector.
General Purpose I/O		
Debug Switches	SW1 to SW4	For debug.
Light-emitting diodes (LEDs)	LED1 to LED4	Four active-high LEDs connected to some of the user I/Os for debugging.

2.5 Handling the Board

Pay attention to the following points while handling or operating the board to avoid possible damage or malfunction:

- Handle the board with electrostatic discharge (ESD) precautions to avoid damage. For information about using the board with ESD precautions, see https://www.microsemi.com/document-portal/doc_view/126483-esd-appnote.
- Power down the board to switch between programming headers J17 and PCIe CONN (CON1).

2.6 Operating Temperature

Extended commercial temperature range (0 °C to 100 °C).

2.7 Powering Up the Board

To power up the board, do the following:

- Connect 12V/5A power supply brick to J29.
- Slide Switch SW6 to **ON** position.
- Power status LEDs 12P0, 5P0, 2P5V, VDDAUX4, 3P3V, VDD, 1P8, 1P1V_LPDDR4, and VDDA will glow.
- Install the software required for developing designs and set the jumpers for the pre-programmed design. For more information, see [Installation and Settings](#), page 7.

The following table provides probing points for power rails.

Table 4 • Power Measurements

#	Power Rail	Probing Point	Tolerance Allowed	Expected Voltage (in Volt)
1	12P0V	C476	+/-5%	12V
2	5P0V	C482	+/-5%	5V
3	1P8V	C542	+/-5%	1.8V
4	2P5V	C786	+/-5%	2.5V
5	1P5V_DDR3	C602	+/-5%	1.5V
6	0P75V_VTT_DDR3	C514	+/-5%	0.75V
7	VDD	C499	+/-3%	1V
8	1P1V_LPDDR4	C574	+/-5%	1.1V
9	1P2V_PHY_VSC_FP6	C587	+/-5%	1.2V
10	3P3V	C527	+/-5%	3.3V
11	VDDA	C556	+/-3%	1.05V

3 Installation and Settings

This section provides information about the software and hardware settings required to run the pre-programmed demo design on the PolarFire SoC ICICLE Kit.

3.1 Software Settings

Download and install the latest release of Microsemi Libero[®] SoC software from the Microsemi website. Generate a *free silver license* for your software. The Libero SoC installer includes FlashPro5 drivers. For instructions about installing Libero SoC, see the *Libero Software Installation and Licensing Guide*. For instructions about how to download and install Microsemi DirectCores and driver firmware cores on the PC where Libero SoC is installed, see the *Installing IP Cores and Drivers User's Guide*.

3.2 Hardware Settings

This section provides information about jumper settings, switches, LEDs on the PolarFire SoC ICICLE Kit.

3.2.1 Jumper Settings

These are the default jumper settings on board.

Table 5 • Jumper Settings

Jumper	Description	Pin	Default Setting
J31	To select LPDDR4 Vref		Open
J9	Select pin for programming FPGA with external FlashPro header or with on-board programmer.		Open
J21	To select PolarFire SoC JTAG reset.		Open
J46	To select 3.3 V for RPI connector from the ICICLE kit		Open
J47	To select 5 V for RPI connector from the ICICLE kit		Open
J15	To select USB ID	Short pin 1-2	
J17	5 V for VBUS switch for USB3340	Short pin 1-2	
J43	To select 1.8 V or 3.3 V for eMMC modes	Short pin 1-2	
J28	Jumper for PolarFire SoC Serdes Vref	Short pin 1-2	
J24	5 V for VBUS switch for USB3320	Short pin 1-2	
J34	To select 1.8 V or 3.3 V for BANK4 voltage	Short pin 1-2	
J35	To select 2.5 V or 3.3 V for BANK4 Aux voltage	Short pin 1-2	
J45	To select 1 V or 1.05 V for VDD core voltage	Short pin 1-2	

3.2.2 Power Supply LEDs

The following table lists the power supply LEDs on the PolarFire SoC ICICLE Kit.

Table 6 • Power Supply LEDs

LED	Description
12P0	12 V power supply
5P0	5 V power supply
2P5V	2.5 V power supply
VDDAUX4	Bank4 Aux voltage
3P3V	3.3 V power supply
VDD	Core voltage
1P8	1.8V power supply
1P1V_LPDDR4	LPDDR4 voltage
VDDA	Power for Serdes channels

3.2.3 Test Points

The following test points are available on the PolarFire SoC ICICLE Kit:

Table 7 • Test Points

Test Point	Description
GND1TP_BLK to GND10TP_BLK	Test point for Ground
SD_D0	Test point for SD_DATA0/eMMCMC_DATA0 at Mux
SD_D1	Test point for SD_DATA1/eMMCMC_DATA1 at Mux
SD_D2	Test point for SD_DATA2/eMMCMC_DATA2 at Mux
SD_D3	Test point for SD_DATA3/eMMC_DATA3 at Mux
SD_CLK	Test point for SD_CLK/eMMC_CLK at Mux
SD_CMD	Test point for SD_CMD/eMMC_CMD at Mux
eMMC_CLK	Test point for eMMCMC_CLK at eMMCMC device
SDC_CLK	Test point for SD_CLK at SD connector
SDC_CMD	Test point for SD_CMD at SD connector
SDC_D3	Test point for SD_DATA3 at SD connector
SDC_D2	Test point for SD_DATA2 at SD connector
SDC_D1	Test point for SD_DATA1 at SD connector
SDC_D0	Test point for SD_DATA0 at SD connector
SD_CLK_FB_EM_D4	Test point for SD_CLK_FB/eMMC_DATA4 at Mux
SD_VSEL_EM_D5	Test point for SD_VSEL/eMMC_DATA5 at Mux
SD_CMD_DIR_EM_D7	Test point for SD_CMD_DIR/eMMC_DATA7 at Mux
SD_WP#_EM_RSTN	Test point for SD_WP#/eMMC_RSTN at Mux
SD_CD#_EM_STB	Test point for SD_CD#/eMMC_STB at Mux
TP19-UART0 TX Togg	Test point for UART0 TX Togg
TP17-UART0 RX Togg	Test point for UART0 RX Togg

Table 7 • Test Points (continued)

TP16-UART1 TX Togg	Test point for UART1 TX Togg
TP15-UART1 RX Togg	Test point for UART1 RX Togg
TP12-UART2 TX Togg	Test point for UART2 TX Togg
TP13-UART2 RX Togg	Test point for UART2 RX Togg
TP14-UART3 TX Togg	Test point for UART3 TX Togg
TP18-UART3 RX Togg	Test point for UART3 RX Togg
XTAL2_VSC	Test point for XTAL2 for Phy
RCLK1_VSC	Test point for Phy recovered clk1
RCLK2_VSC	Test point for Phy recovered clk2
CKO_VSC	Test point for Phy clkout
THMDA1	Test point for THMDA1
FIBR_DIP_1	Test point for PHY_Serdes receiver input pair
FIBR_DIN_1	Test point for PHY_Serdes receiver input pair
FIBR_DOP_1	Test point for PHY_Serdes transmitter output pair
FIBR_DON_1	Test point for PHY_Serdes transmitter output pair
FIBR_DIP_0	Test point for PHY_Serdes receiver input pair
FIBR_DIN_0	Test point for PHY_Serdes receiver input pair
FIBR_DOP_0	Test point for PHY_Serdes transmitter output pair
FIBR_DON_0	Test point for PHY_Serdes transmitter output pair
TP1 to TP6 -	Test points for PCIe reserved pins
TP_VDD	Test point for VDD_core voltage
TP_1P1V	Test point for 1.1V
GND_1P1V	Test point for 1.1V_Ground
TP_1P2V	Test point for 1.2V
GND_1P2V	Test point for 1.2V_Ground
TP_3P3V	Test point for 3.3V
TP_VDDA	Test point for VDDA voltage
TP_2P5V	Test point for 2.5V
TP_1P8V	Test point for 1.8V
TP_5P0V	Test point for 5V
GND_1P8V	Test point for 1.8V_Ground

3.3 Power Sources

The PolarFire SoC ICICLE Kit uses Microsemi power supply devices. For more information about these power supply devices, see [Microsemi Power Management web page](#).

The following table lists the key power supplies required for normal operation of the PolarFire SoC ICICLE Kit.


Table 8 • I/O Voltage Rails

Supply Name	Description	Value (in Voltage)
VDD	Core Power	1.0 / 1.05
VDD25	Power for PLL/ICB/Bank Controller/PNVM/Programming Analog block	2.5
VDDA	Power for SerDes RX Channels [3:0] Power for SerDes TX Channels [3:0]	1.0 / 1.05
VDDA25	Power for SerDes PLLs	2.5
VDD18	HSIO/MSS_DDR Receiver Input Power SE Corner Oscillator Power for programming blocks, analog block and SW Corner Oscillator	1.8
VDDI0	HSIO Bank Power	1.2, 1.5, 1.8
VDDI1	GPIO Bank Power	1.2, 1.5, 1.8, 2.5, 3.3
VDDI2	MSSIO Bank Power	1.2, 1.5, 1.8, 2.5, 3.3
VDDI3	Power for JTAG Ios	1.8, 2.5, 3.3
VDDI4	MSSIO Bank Power	1.2, 1.5, 1.8, 2.5, 3.3
VDDI5	MSS SGMII Bank Power & Pre-Driver	2.5, 3.3
VDDI6	MSS DDR (HSIO) Bank Power	1.2, 1.5, 1.8
VDDI7	GPIO Bank Power	1.2, 1.5, 1.8, 2.5, 3.3
VDDI8	HSIO Bank Power	1.2, 1.5, 1.8
VDDI9	GPIO Bank Power	1.2, 1.5, 1.8, 2.5, 3.3
VDDAUX1	GPIO Pre-Driver Bank Power	2.5, 3.3
VDDAUX2	MSSIO Pre-Driver Bank Power	2.5, 3.3
VDDAUX4	MSSIO Pre-Driver Bank Power	2.5, 3.3
VDDAUX7	GPIO Pre-Driver Bank Power	2.5, 3.3
VDDAUX9	GPIO Pre-Driver Bank Power	2.5, 3.3
XCVR_VREF	All SerDes RefClk receiver's voltage reference pin	0.9/1.25

Note: Bank 9 VDDI power pins are connected to Bank 1 VDDI power pins within the package substrate for pin migration compatibility.

The following figure shows voltage rails (12 V, 5 V, 3.3 V, 2.5 V, 1.8 V, 1.2 V, and 1.0 V) available on the PolarFire SoC ICICLE Kit.

Figure 3 • Voltage Rails on PolarFire SoC ICICLE Kit

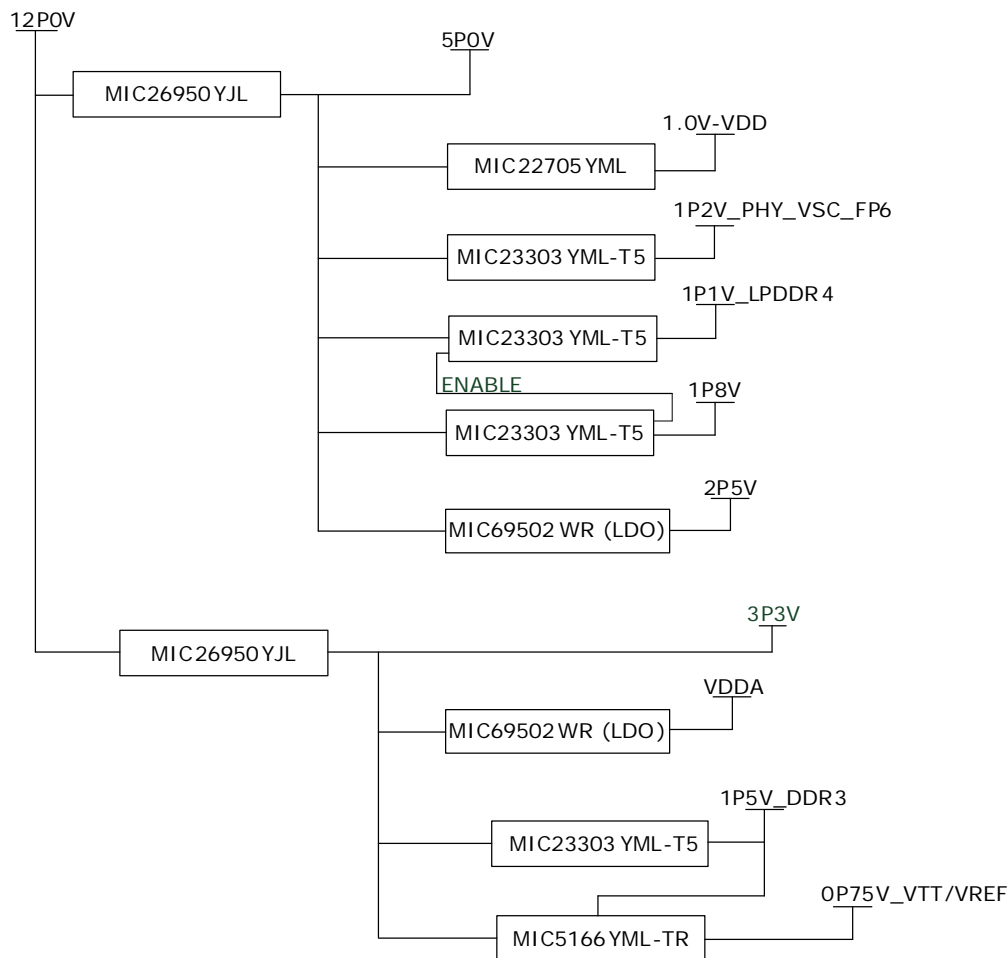

The following table lists the power regulators used for PolarFire SoC FPGA ICICLE voltage rails.

Table 9 • Power Regulators

Voltage Rail	Part Number	Description	Current
5V	MIC26950JL	IC REG BUCK ADJ 12A	12A
VDD (1V)	MIC22705YML	IC REG BUCK ADJUSTABLE 7A	7A
VSC_PHY(1.2V)	MIC23303YML-T5	IC REG BUCK ADJUSTABLE 3A	3A
1.1V_LPDDR4	MIC23303YML-T5	IC REG BUCK ADJUSTABLE 3A	3A
1P8V	MIC23303YML-T5	IC REG BUCK ADJUSTABLE 3A	3A
2P5V	MIC69502WR	IC REG LINEAR POS ADJ 5A	5A
3P3V	MIC26950JL	IC REG BUCK ADJ 12A	12A
VDDA	MIC69502WR	IC REG LINEAR POS ADJ 5A	5A
1P5V_DDR3	MIC23303YML-T5	IC REG BUCK ADJUSTABLE 3A	3A
VTT	MIC5166YML-TR	IC PWR SUP 3A HS DDR TERM 10MLF	3A

4 Board Components and Operations

This section describes the key components of the PolarFire SoC ICICLE Kit and provides information about important board operations. For device datasheets, see [PolarFire SoC Page](#).

For more information, see the [Board Level Schematics document](#).

4.1 LDDR4 Memory Interface

LPDDR4 is connected to the MSS BANK 6.

- Part number: MT53D512M32D2DS-053 WT:D TR
- Manufacturer: Micron
- Frequency range: 800 MHz
- Memory size: 16 Gb


4.2 SPI Serial Flash

PolarFire SoC ICICLE Kit has one SPI flash 1 Gb (Giga bit). Flash is connected to BANK3 SC-SPI pins to support IAP programming.

- Part number: MT25QL01GBBB8ESF-0SIT
- Manufacturer: Micron
- Flash Type: NOR

The following figure shows the SPI Flash interface of the PolarFire SoC ICICLE Kit.

Figure 4 • SPI Flash Interface

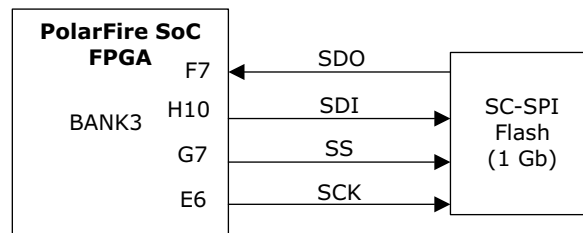

4.3 eMMC and SDIO Interface

PolarFire SoC MSS BANK4 has MUXed IOs for SDIO or eMMC interface. PolarFire SoC ICICLE Kit uses on board MUX U44 and U29 to select interface between 8 GB eMMC device or SD card connector.

4.3.1 eMMC

- Part number: SDINBDG4-8G
- Manufacturer: SanDisk
- eMMC 5.1
- Supports variable clock frequencies of 0-20 MHz, 0-26 MHz (default), 0-52 MHz (high-speed), 0-200MHz SDR (HS200), 0-200 MHz DDR (HS400)
- Dual power system: Core voltage (Vcc) 2.7 to 3.3V, IO (VCCQ) voltage either: 1.7-1.95V or 2.7-3.6V

4.3.2 SD Card

PolarFire SoC ICICLE Kit has one SD card connector

- Part number: 10067847-001RLF
- Manufacturer: Amphenol ICC (FCI)
- SD interface is connected using voltage translator between SD card connector and MUX (eMMC/SD)
- Supported modes are default speed (25 MHz), high speed (50 MHz), UHS-I (SDR12, SDR25, SDR50, SDR14, and DDR50).

4.4 High Speed Transceivers Configuration

4.4.1 Transceivers Block Allocations

- MPFS250T-FCVG484EES has one XCVR block and 4 SERDES LANES available.

4.4.2 PCIE16 Connector

XCVR x4 lanes are mapped to PCIe CONN.

On board PCIe16 straddle Mount root port connector is available in PolarFire SoC ICICLE Kit.

- Part number: 10025026-10103TLF
- Manufacturer: Amphenol ICC
- 4-TX/Rx pairs are connected to SERDES block
- 100MHz reference clock is provided to connector

4.5 Communication Interfaces

4.5.1 Ethernet – SGMII Interface

VSC8662 device is a low-power, dual Gigabit Ethernet transceiver (1000BASE-X Gigabit Ethernet Transceiver PHY)

- Part number: VSC8662
- VSC8662 MAC interface dual port signals (Port 0 and Port1) RX/TX is connected on MSS SGMII Bank 5
- VSC8662 MDC and MDIO signals are connected MSS BANK 2

4.5.2 CAN Interface

PolarFire SoC ICICLE Kit has two CAN interfaces. One interface is from the MSS BANK 2 and another interface is from the GPIO BANK 1.

- Part number: MCP2562FDT-E/SN
- Manufacturer: Microchip

4.5.3 USB OTG

USB3340 is a Hi-Speed USB 2.0 Transceiver that provides a physical layer (PHY) solution well-suited for portable electronic devices.

- Part number: USB3340-EZK-TR
- Manufacturer: Microchip
- USB interface uses MSS BANK 2
- 26MHz on board crystal for reference clock

4.6 Expansion Capabilities

Below are the expansion connectors for PolarFire SoC ICICLE Kit.

4.6.1 Raspberry Pi 4 Connector

PolarFire SoC ICICLE Kit has 40 pin Raspberry pi connector.

- Part number: 61204021621
- Manufacturer: Wurth Electronics.
- Raspberry pi signals use GPIO BANK 1, BANK 9

4.6.2 mikroBUS Connector

PolarFire SoC ICICLE Kit has 16 pin mikroBUS interface connector.

- UART, SPI, and I2C signals
- SPI signals use MSS BANK 2
- I2C, UART and other GPIO signals use GPIO BANK 1, BANK 9

4.7 Voltage and Current Monitoring

PolarFire SoC ICICLE Kit has provision to measure current for four power rails.

1. VDD
2. VDD25
3. VDDA25
4. VDDA

Current sensing is done by PAC1934T-I/JQ. I2C interface available on digital values to read back values. Sensor's I2C interface is connected to MSS I2C interface.

4.8 GPIO

4.8.1 Switches and LEDs

PolarFire SoC ICICLE Kit is equipped with four tact switches and four LED indicators.

- Switches and LEDs are connected to HSIO BANK 0

4.8.2 LEDs

LED's to indicate:

- Power
- User defined LEDs (quantity – 4)

4.9 User Interface

The PolarFire SoC ICICLE Kit has four user defined LEDs and four push-button switches.

4.9.1 USB to UART Interface

CP2108 is a USB to quad UART bridge controller to support 4 UART interface on board. UART IOs are connected to the Fabric IOs (Bank1) of PolarFire SoC.

- Part number: CP2108-B02-GM
- Manufacturer: Silicon Labs
- UART interface uses GPIO BANK 1, BANK 9

4.10 Mux for JTAG Selection

Multiplexer U22 is used for JTAG selection for on board FlashPro connector and Embedded FlashPro 6.

- Part number: 74CBTLV3257BQ,115
- Manufacturer: NXP

Table 10 • Mux for JTAG Selection

Jumper (J9)	JTAG Selection
Open	On board connector
Close	Embedded FlashPro 6


4.11 Programming Scheme

PolarFire SoC silicon is programmed in two ways:

1. Using FlashPro header connected to BANK3 of PolarFire SoC
2. On-board programmer (BANK 7)

Below is the block diagram for programming scheme of PolarFire SoC.


Figure 5 • PolarFire SoC Programming Scheme Block Diagram

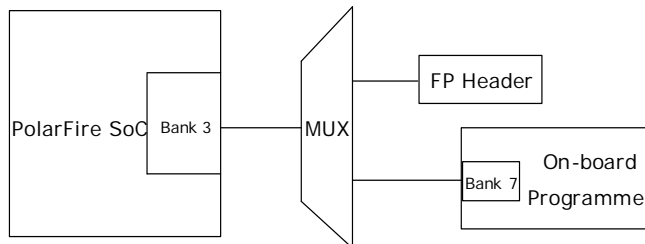

4.12 System Reset

DEVRST_N is an input-only reset pad that allows a full reset of the chip to be asserted at any time. The following figure shows a sample reset circuit that uses a Microchip MCP121T-240E/TT device.

Figure 6 • Reset Circuit

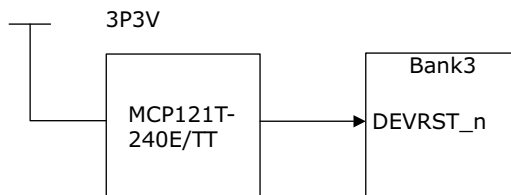


4.13 50-MHz Oscillator

A 50-MHz clock oscillator with an accuracy of +/-10 ppm is available on the board. This clock oscillator is connected to the FPGA fabric to provide a system reference clock.

The pin number of the 50-MHz oscillator is W12, and the pin name is HSIO92PB0/CLKIN_N_2/CCC_NW_CLKIN_N_2/CCC_NW_PLL1_OUT0.

The following figure shows the 50-MHz clock oscillator interface.

Figure 7 • 50-MHz Clock Oscillator

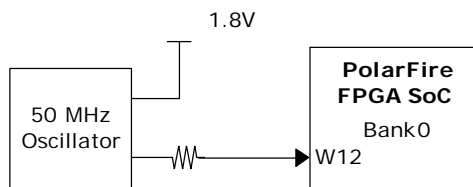

For more information, see the Board-Level Schematics document (provided separately).

5 Pin List

For information about all package pins on the PolarFire SoC, see *PolarFire SoC MPFS250T_MPFS250TS-FCVG484 Package Pin Assignment Table*.

6 Board Component Placement

The following figure shows the placement of various components on the PolarFire SoC ICICLE Kit silkscreen.

Figure 8 • Silkscreen Top View


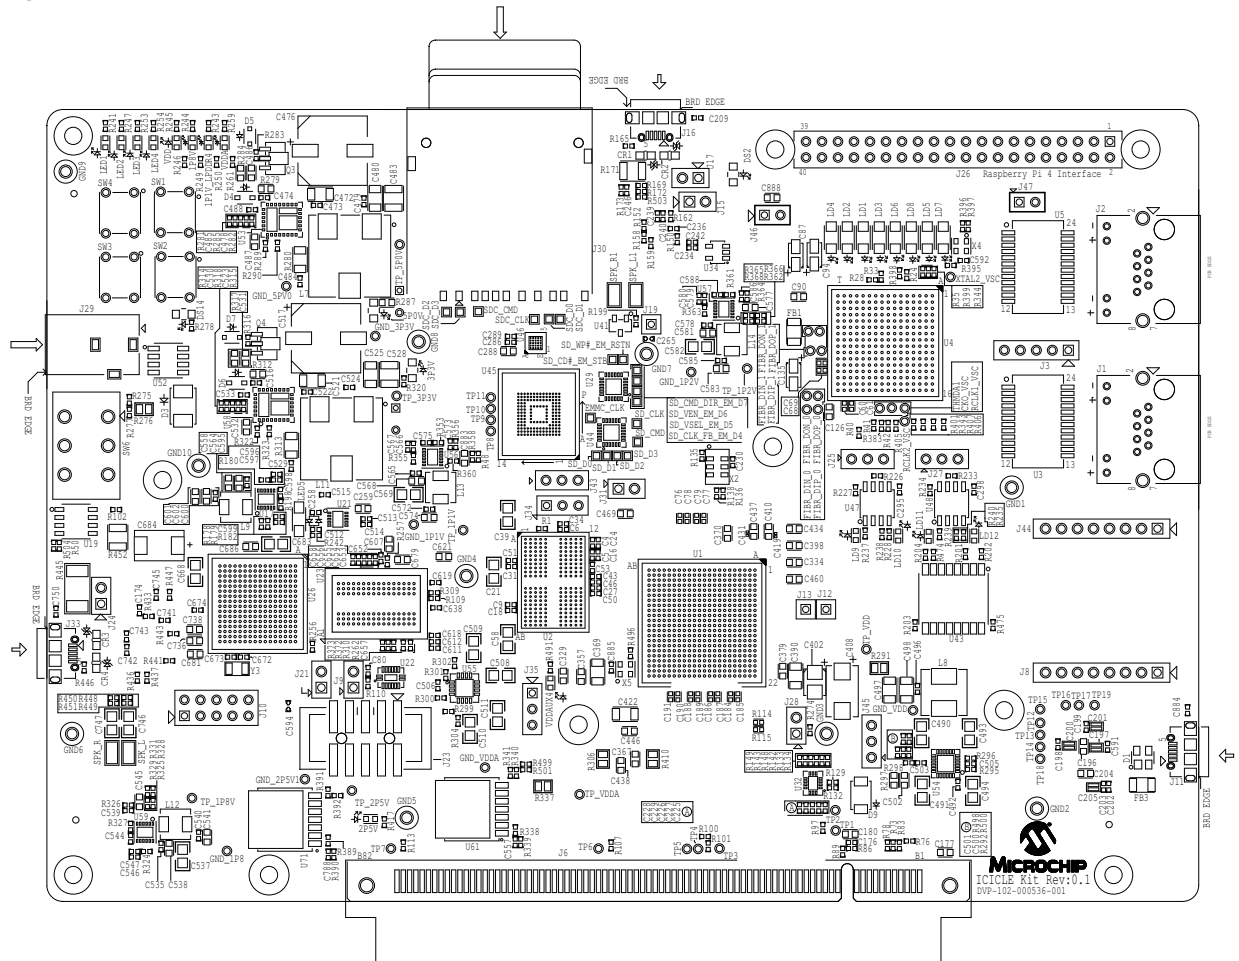


Figure 9 • Silkscreen Bottom View

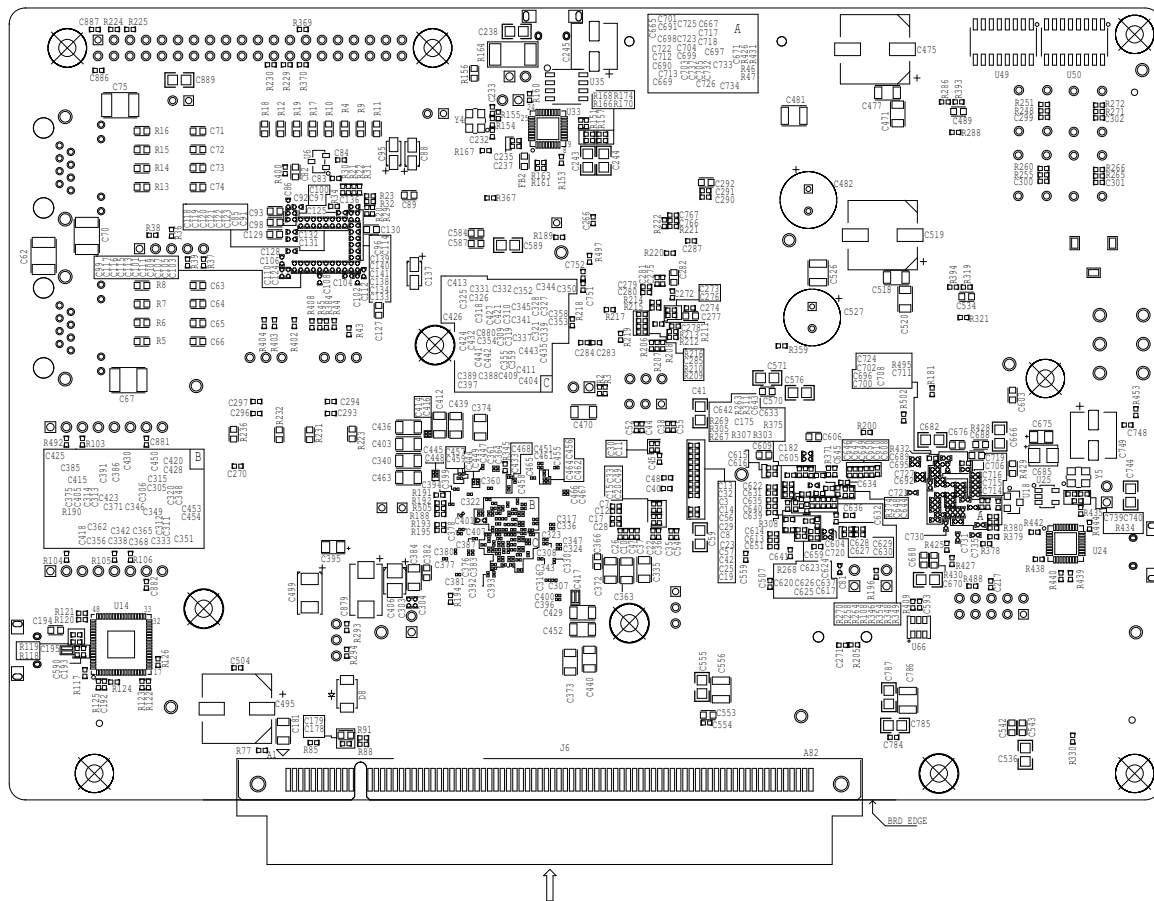

7 Demo Design

To be updated in future version.

8 Appendix: Programming PolarFire SoC FPGA Using the On-Board FlashPro6

The PolarFire SoC ICICLE Kit includes an on-board FlashPro6 programmer. An external programmer hardware is, therefore, not required to program the PolarFire SoC device. The device can be programmed using the FlashPro software installed on the host PC.

Follow these steps to program an on-board PolarFire SoC device using the on-board FlashPro6 programmer.

Note: The programming file will be available in a future release.

1. Connect the power supply cable to the J23 connector on the board.
2. Open Jumper J9 for mux U22.
3. Power on the board using the **SW6** slide switch.
When the board is successfully set up, the power LEDs start glowing.
Download FlashPro Express from the following location: <https://www.microsemi.com/product-directory/programming/4977-flashpro#software>
4. On the host PC, start the FlashPro Express software.
5. Click **New Project** to create a new project.
6. In the **New Project** window, do the following, and click OK:
 - Enter a project name.
 - Select **Single device** as the programming mode.
7. Click **Configure Device**.
8. Click **Browse**, and select the .stp file from the Load Programming File window.
9. From the **View Programmer** pane, select the on-board FlashPro6 programmer.
10. Click Program to program the device.
The **Programmer List** window in the FlashPro Express software shows the programmer name, programmer type, port, programmer status, and information about whether the programmer is enabled.
11. When the device is programmed successfully, a **Run Program PASSED** status is displayed.