

**APPLICATIONS**

- ✓ RS-232 and RS-423 Data Lines
- ✓ T1/E1 & T3/E3
- ✓ ATM Circuit Interfaces
- ✓ ADSL/HDSL & ISDN Interfaces
- ✓ V.34/V.90
- ✓ Cable Modem Intra-Structure Protection

**IEC COMPATIBILITY (EN61000-4)**


- ✓ 61000-4-2 (ESD): Air - 15kV, Contact - 8kV
- ✓ 61000-4-4 (EFT): 40A - 5/50ns
- ✓ 61000-4-5 (Surge): 8/20 $\mu$ s - 95A, L4(Line-Gnd) & 48A, L4(Line-Line) & 83A, L2(Power)

**FEATURES**

- ✓ 600 Watts Peak Pulse Power per Line (tp=10/1000 $\mu$ s)
- ✓ 100A (2/10 $\mu$ s) per Bellcore GR-1089 (Intra-Building)
- ✓ Isolated VSIP® Technology
- ✓ ESD Protection > 40 kilovolts
- ✓ High Surge Capability
- ✓ Lead Spacing of 0.100"
- ✓ Available in 3 Voltages: 5V, 6.5V & 12V
- ✓ Low Capacitance < 50pF
- ✓ RoHS Compliant

**MECHANICAL CHARACTERISTICS**

- ✓ Molded Plastic VSIP® Package
- ✓ Weight 1.5 grams (Approximate)
- ✓ Available in Lead-Free Pure-Tin Plating(Annealed)
- ✓ Solder Reflow Temperature:  
Pure-Tin - Sn, 100: 260-270°C
- ✓ Consult Factory for Leaded Device Availability
- ✓ Flammability Rating UL 94V-0
- ✓ Marking: Logo, Part Number, Date Code & Pin One Defined By Dot on Top of Package

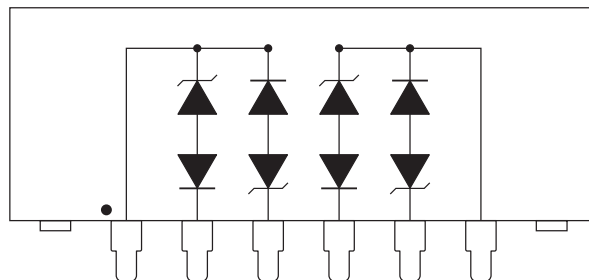
**6 PIN VSIP**
**PIN CONFIGURATION**


# VSB06P05LCI thru VSB06P12LCI

## DEVICE CHARACTERISTICS

### MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

PARAMETER	SYMBOL	VALUE	UNITS
Peak Pulse Power ( $t_p = 10/1000\mu s$ ) - See Figure 1	$P_{PP}$	600	Watts
Operating Temperature	$T_L$	-55°C to 150°C	°C
Storage Temperature	$T_{STG}$	-55°C to 150°C	°C

### ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

PART NUMBER (See Note 1)	DEVICE MARKING	RATED STAND-OFF VOLTAGE  $V_{WM}$ VOLTS	MINIMUM BREAKDOWN VOLTAGE  @ 1mA $V_{(BR)}$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)  @ $I_P = 10A$ $V_C$ VOLTS	MAXIMUM CLAMPING VOLTAGE (See Fig. 2)  @ 10/1000 $\mu s$ $V_C @ I_{FP}$	MAXIMUM LEAKAGE CURRENT  @ $V_{WM}$ $I_b$ $\mu A$	MAXIMUM CAPACITANCE  0V @ 1 MHz $C_j$ pF
VSB06P05LCI	VSB06P05LCI	5	6.0	12.5	16.5V @ 36.0A	300	50
VSB06P6.5LCI	VSB06P6.5LCI	6.5	7.2	11.6	15.6V @ 38.0A	300	50
VSB06P12LCI	VSB06P12LCI	12	13.3	18.8	22.8V @ 26.0A	2	50

**Note 1:** Do not surge from pins 2 to 1, 1 to 3 or 4 to 6, 6 to 5. PIV typically greater than 100 volts for each rectifier diode. For circuit applications external pins 2 & 3 and 4 & 5 are connected.

GRAPHS

FIGURE 1  
 PEAK PULSE POWER VS PULSE TIME

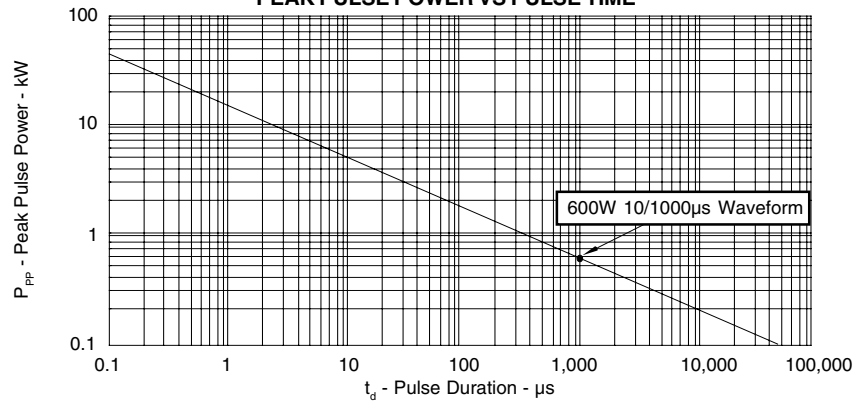


FIGURE 2  
 PULSE WAVE FORM



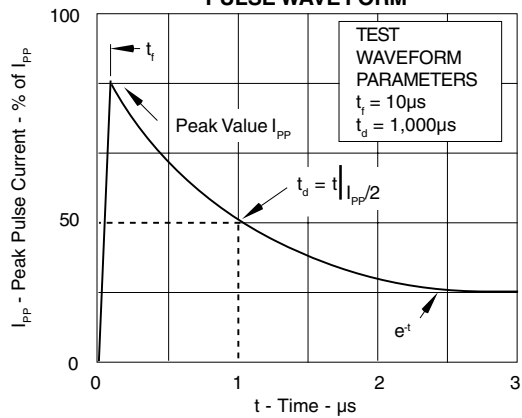


FIGURE 3  
 POWER DERATING CURVE

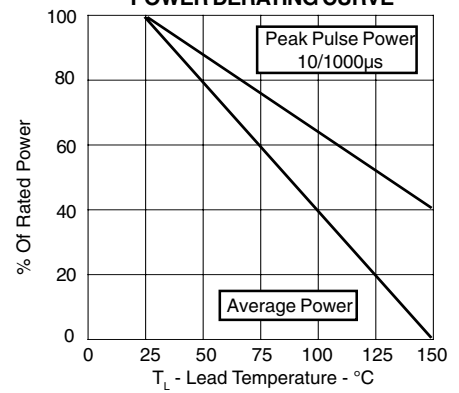

# VSB06P05LCI thru VSB06P12LCI

## 6 PIN VSIP PACKAGE OUTLINE & DIMENSIONS

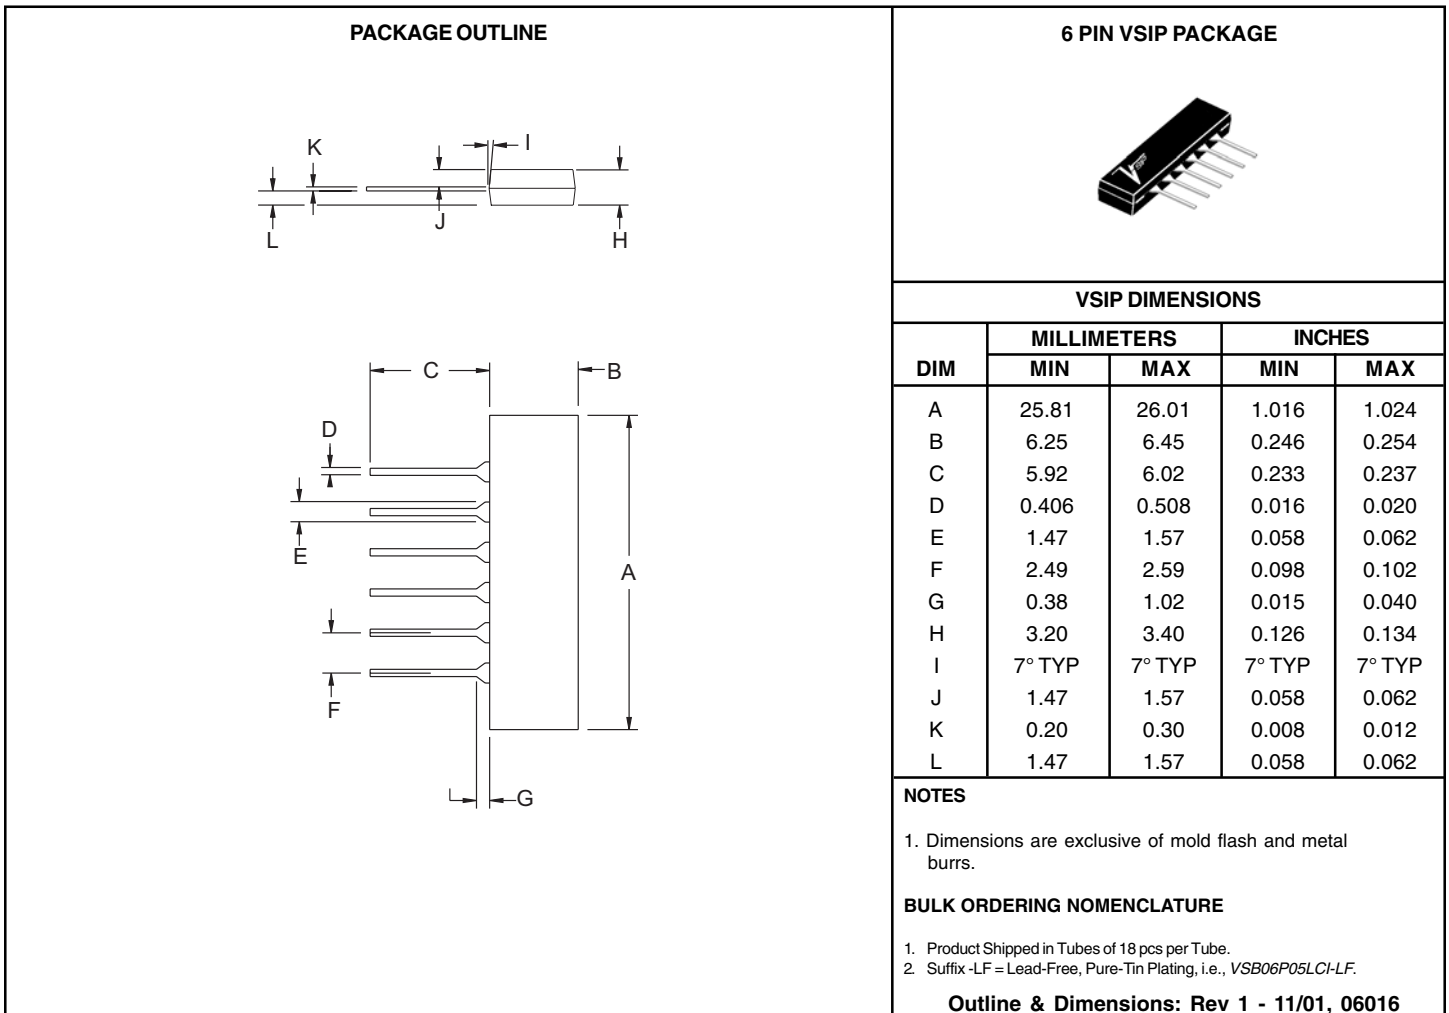

**COPYRIGHT © ProTek Devices 2007**

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice (except JEDEC).

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice, and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance, ProTek assumes no responsibility with respect to the selection or specifications of such products.

**ProTek Devices**  
2929 South Fair Lane, Tempe, AZ 85282  
Tel: 602-431-8101 Fax: 602-431-2288  
E-Mail: [sales@protekdevices.com](mailto:sales@protekdevices.com)  
Web Site: [www.protekdevices.com](http://www.protekdevices.com)