




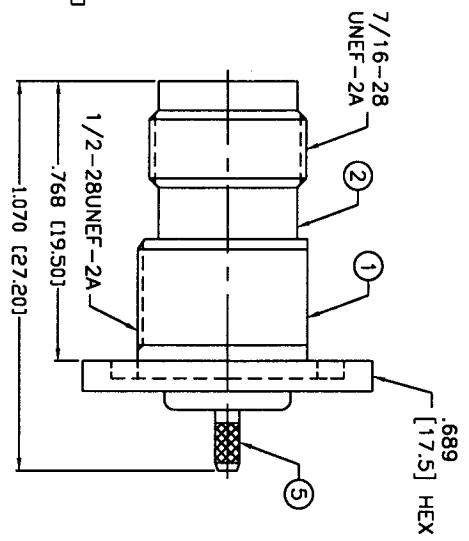
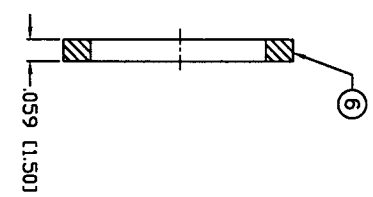
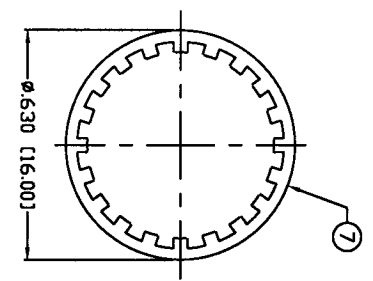


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO RF INDUSTRIES.
 ANY UNAUTHORIZED USE OF THIS DRAWING IS EXPRESSLY PROHIBITED
 WITHOUT WRITTEN PERMISSION FROM RF INDUSTRIES.
 ANY VIOLATION IS PUNISHABLE UNDER U.S. COPYRIGHT LAWS.

ALL DIMENSIONS ARE REFERENCE ONLY

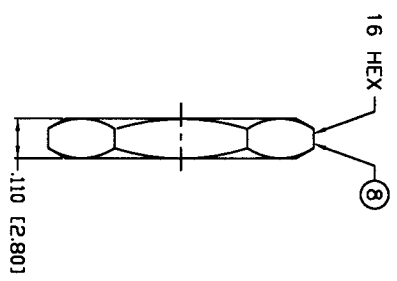

RECOMMENDED
STRIPPING DIMENSIONS



RECOMMENDED
MOUNTING HOLE

SPECIFICATIONS:

IMPEDANCE: 50 Ohms
 FREQUENCY RANGE: 0-11 GHz
 WORKING VOLTAGE: 500 VRMS
 INSULATION RESISTANCE: 5k M ohms min.
 TEMPERATURE RANGE: -65°C TO 85°C
 FOR RG-178, 178A, 178B, 196 & 196A/U CABLE

#	DESCRIPTION	QTY	MATERIAL	FINISH	APPROVALS	DATE
1	BODY	1	BRASS	NICKEL, 100μ"		
2	TNC BODY	1	BRASS	NICKEL, 100μ"		0088974
3	INSULATOR	1	PTFE	---		
4	PIN	1	PHOS BRONZE	GOLD, 50μ"		
5	FERRULE STUD	1	BRASS	NICKEL, 100μ"		
6	GASKET	1	RUBBER	---		
7	LOCK WASHER	1	BRASS	NICKEL, 100μ"		
8	HEX NUT	1	BRASS	NICKEL, 100μ"		
9	PIN	1	BRASS	GOLD, 50μ"		
10	FERRULE	1	COPPER	NICKEL, 100μ"		
11					DRAWN	
12					G. CALLEGOS	1/30/02
13					CHECKED	1/30/02
14					ORU DRAWN	1/30/02

UNLESS OTHERWISE SPECIFIED:
 1. REMOVE ALL BURRS
 2. BREAK ALL CORNERS & EDGES .005 R. MAX.
 3. CHAMFER 1ST & LAST THREADS 45°
 4. SURFACE ROUGHNESS 63 FINISH MIL-STD-10
 5. DIAMETERS ON COMMON CENTERS TO BE
 CONCENTRIC WITHIN .002 T.I.R.
 6. ALL DIMENSIONS ARE AFTER PLATING.

DIMENSIONS ARE IN INCHES
 AND [MILLIMETERS]
 UNLESS OTHERWISE NOTED
 TOLERANCES ARE:
 DECIMALS .xxx±.003 [.03]
 .xxx±.005 [.13]

RF connectors
 DIVISION OF RF INDUSTRIES, LTD.
 7610 MIRAMAR RD
 SAN DIEGO, CA 92126
 (858) 549-6340
 (858) 549-6345 FAX

TNC JACK CRIMP

REVERSE POLARITY, BULKHEAD

SIZE	CABLE GROUP	DWG. NO.	REV
A	A	RP-1212-A	-
SCALE:	NTS	CAD FILE	OUTLINE
SHEET	1	OF	1

REV	DESCRIPTION	DWN	DATE	APPROVED
-	ENGINEERING RELEASE	GGC	10/16/97	JDMC

PART NO. **RP-1212-A**