

# Sierra Wireless AirPrime™ Embedded Wireless Modules Q Series

## Wireless Anywhere with One Single Design

Available in 2G and 3G versions, all AirPrime Q Series modules are footprint compatible. Make a single product design to communicate on any cellular network, anywhere in the world.

To simplify hardware integration into your product, its industrial-grade board-to-board connector offers a wide range of interfaces.

With its application framework and cloud-based device management services, the smart AirPrime Q Series modules accelerate your M2M deployment.

Choose the AirPrime Q Series to connect your solutions for the transportation, industrial, energy, healthcare and security sectors.

### AIRPRIME Q2698

The AirPrime Q2698 is a 5-band 3G HSPA+ module with GPS for your worldwide deployments.

### AIRPRIME Q2686

The AirPrime Q2686 is a quad-band 2G GPRS module.

### AIRPRIME Q2687

The AirPrime Q2687 supports quad-band 2G connectivity up to EDGE.

### AIRPRIME Q26 ELITE

The AirPrime Q26 Elite is a 2G CDMA 2000 1xRTT module.

### EXTENSIVE HARDWARE FEATURES

All AirPrime Q Series modules support an extended temperature range of -40°C to +85°C, present best-in-class analog and digital audio capabilities and offer a wide range of hardware interfaces.

### ADVANCED SOFTWARE CAPABILITIES

OpenAT

#### Open AT Application Framework

The AirPrime Q Series\* features the Open AT Application Framework to make software application development easier and less expensive. Its software building blocks and tools are field-proven, with a 10-year track record.

#### A Comprehensive Set of Libraries

Open AT features a best-in-class embedded IP stack, a security library, a location library and a large set of audio APIs.

### CONNECTION TO A CLOUD-BASED PLATFORM


The AirPrime Q Series enables access to the AirVantage Platform to remotely monitor, control and upgrade your devices in the field through a web portal.



#### KEY BENEFITS

- Easy hardware integration
- Fast embedded software development
- Extensive global network coverage
- Form-factor compatibility between 2G and 3G markets
- Safe investment with cloud-based device management services

Smart

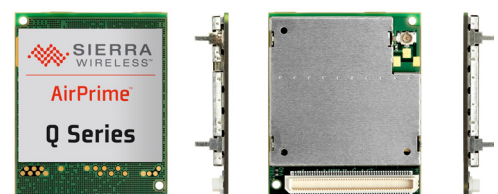

AirPrime™

\*All AirPrime Q Series modules except for the AirPrime Q26 Elite

# Sierra Wireless AirPrime™ Embedded Wireless Modules Q Series



	Q2686	Q2687	Q2698	Q26 Elite
<b>AIR INTERFACE</b>				
GSM/GPRS	GSM/GPRS	GSM/GPRS/EDGE	GSM/GPRS/EDGE/HSPA+	CDMA 1xRTT
<b>FREQUENCY BANDS</b>				
GSM/GPRS/EDGE	850/900/1800/1900 MHz	850/900/1800/1900 MHz	850/900/1800/1900 MHz	
WCDMA			800/850/900/1900/2100 MHz	
CDMA 1xRTT				800/1900 MHz
<b>APPROVALS</b>				
Regulatory	GCF-CC, PTCRB R&TTE (CE), FCC	GCF-CC, PTCRB R&TTE (CE), FCC, A-Tick, Anatel	GCF-CC, PTCRB - Planned R&TTE (CE), FCC/IC, A-Tick, JPA - Planned	FCC, IC, CDG 1&2
Carrier		AT&T, Vodafone	Telstra, NTT DoCoMo, AT&T - Planned	Sprint, Verizon
<b>CURRENT CONSUMPTION</b>				
Alarm	17uA	17uA	30uA	
Standby and Idle	2.5mA	2.5mA	2.5mA	5mA
GSM/GPRS max	400mA max GPRS class 10	400mA max GPRS class 10	600mA GPRS class 10	
HSPA max			600mA max; HSDPA full power	
<b>CPU PERFORMANCES</b>				
Processor	ARM946 / DSP	ARM946 / DSP	ARM1136	ARM9
Core frequency	26-104 MHz	26-104 MHz	480 MHz	192 MHz
User MIPS available	87 MIPS	87 MIPS	500 MIPS	
<b>AUDIO</b>				
Analog audio	2 x speaker out -2 x micro in	2 x speaker out -2 x micro in	1 x speaker out -1 x micro in	2 x speaker out -2 x micro in
Digital audio Codec	PCM HR, FR, EFR, AMR	PCM HR, FR, EFR, AMR	PCM GSM: HR, FR, EFR, AMR WCDMA: AMR	PCM EVRC/QCELP/EVRC-B
Quality	VDA2A	VDA2A		
Echo cancellation & noise reduction	✓	✓	✓	✓
DTMF	✓	✓	✓	✓
<b>INTERFACES</b>				
UART	2	2	2	2
USB	USB 2.0 Full Speed (12 Mbps)	USB 2.0 Full Speed (12 Mbps)	USB 2.0 High Speed (480 Mbps)	Device 2.0 (Full Speed)
SPI	2	2	2	
I2C	1	1	1	1
ADC	2	2	3	2
DAC	1	1		1
GPIO	Up to 44	Up to 44	Up to 45	Up to 20*
RTC	✓	✓	✓	✓
Timers (HW, SW, Capture)	✓	✓	✓	
Interrupts pins	2	2	3	
Flash LED output	1	1	1	1
PWM (Buzzer)	1	1	1	1
Keyboard interface	5x5	5x5		5x5
SIM interface	1.8V/3V SIM and U-SIM	1.8V/3V SIM and U-SIM	1.8V/3V SIM and U-SIM	RUIM
<b>ANTENNA DIVERSITY</b>			✓	
<b>LOCATION SOLUTION</b>				
	AirPrime XM0110 GPS module and Location Library	AirPrime XM0110 GPS module and Location Library	GPSOne XTRA™ and Location Library	GPSOne
<b>EMBEDDED SIM</b>	Optional	Optional	Optional	
<b>CONTROL OPTIONS</b>	AT commands, C/C++ language	AT commands, C/C++ language	AT commands, C/C++ language	AT commands
<b>APPLICATION FRAMEWORK</b>	Open AT	Open AT	Open AT	
<b>MANAGEMENT SERVICES</b>	✓	✓	✓	
<b>INTERNET SERVICES</b>	TCP/UDP/FTP/HTTP/SMTP/POP3/ SNMP/SSL/MMS	TCP/UDP/FTP/HTTP/SMTP/POP3/ SNMP/SSL/MMS	TCP/UDP/FTP/HTTP/SMTP/POP3/ SSL/MMS	TCP/UDP
<b>HOST OS COMPATIBILITY</b>				
Windows® Mobile/CE RIL	✓	✓	✓	
Android™ RIL	✓	✓	✓	
Linux® SDK	✓	✓	✓	
<b>DEVICE DIMENSIONS</b>	32 x 40 x 4 mm	32 x 40 x 4 mm	32 x 40 x 6.2 mm	32 x 40 x 6.63 mm
<b>TEMPERATURE</b>	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C

\* Multiplexed