


X-STM32MP expansion board for robotics applications

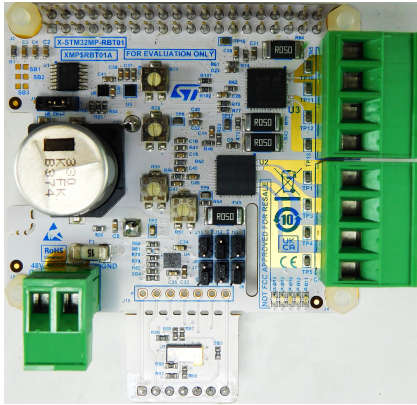

Features

- STSPIN948 motor driver IC
- Able to drive four DC motors simultaneously
- ISM330DHCXTR, on board iNEMO inertial module for accelerometer and gyroscope
- LPS22HH, pressure sensor for altitude measurement
- IIS2MDC, magnetometer for position accuracy
- VL53L5CX, ToF sensor
- LEDs for power and motors
- M24C32-RMN6TP, EEPROM for automatic GPIO setup and driver setup
- Compatible with both STM32MP157F-DK2, STM32MP257F-DK and Raspberry Pi's GPIO connector

Description

Product summary	
X-STM32MP expansion board for robotics applications	X-STM32MP-RBT01
Software for X-STM32MP-RBT01	X-LINUX-RBT1
Discovery kit with STM32MP157F MPU	STM32MP157F-DK2
Discovery kit with STM32MP257F MPU	STM32MP257F-DK
Applications	Factory automation /Home and professional appliances/ Industrial robots

The X-STM32MP-RBT01 is an MPU expansion board with STSPIN948 motor driver IC for brushed DC motors. Using two STSPIN948 devices, the board can drive four DC motors simultaneously with up to 48 V power supply.

The power rating of the board is 480 Watts at 48 V dc voltage rating with each of the four DC motor consuming a maximum 2.5 A current.

The X-STM32MP-RBT01 interfaces with the STM32MP microprocessor via 40-pin GPIO connector pins using I²C, UART, PWM, and GPIO connections for various components. It is compatible with both STM32MP157F-DK2, STM32MP257F-DK and Raspberry Pi's GPIO connector layout.

The STSPIN948 is a 4.5 A dual full-bridge driver for brushed DC motors. The power stage is designed with high dynamic performance, allowing to achieve high frequency PWM control with precise duty-cycle.

The iNEMO inertial module ISM330DHCX has a full-scale acceleration range of $\pm 2/\pm 4/\pm 8/\pm 16$ g and a wide angular rate range of $\pm 125/\pm 250/\pm 500/\pm 1000/\pm 2000/\pm 4000$ dps.

The LPS22HH is a high-performance MEMS nano pressure sensor: 260-1260 hPa absolute digital output barometer.

The IIS2MDC is a high-accuracy, ultra-low-power 3-axis digital magnetometer having a dynamic range up to ± 50 gauss.

The VL53L5CX is a Time-of-Flight (ToF) 8x8 multizone ranging sensor with a wide field of view.

1 Connector

Figure 1. Connector



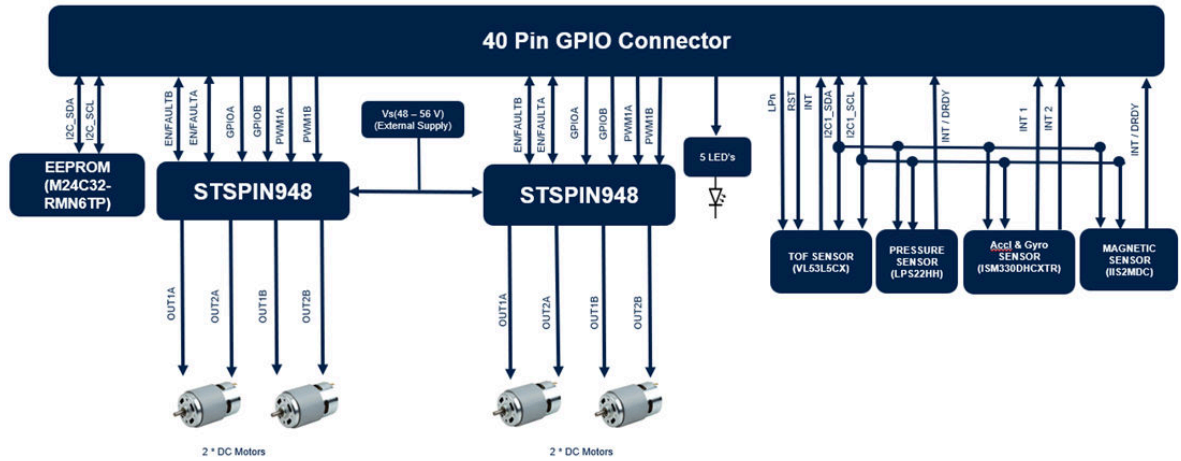


Figure 2. X-STM32MP-RBT01 circuit schematics (1 of 10)

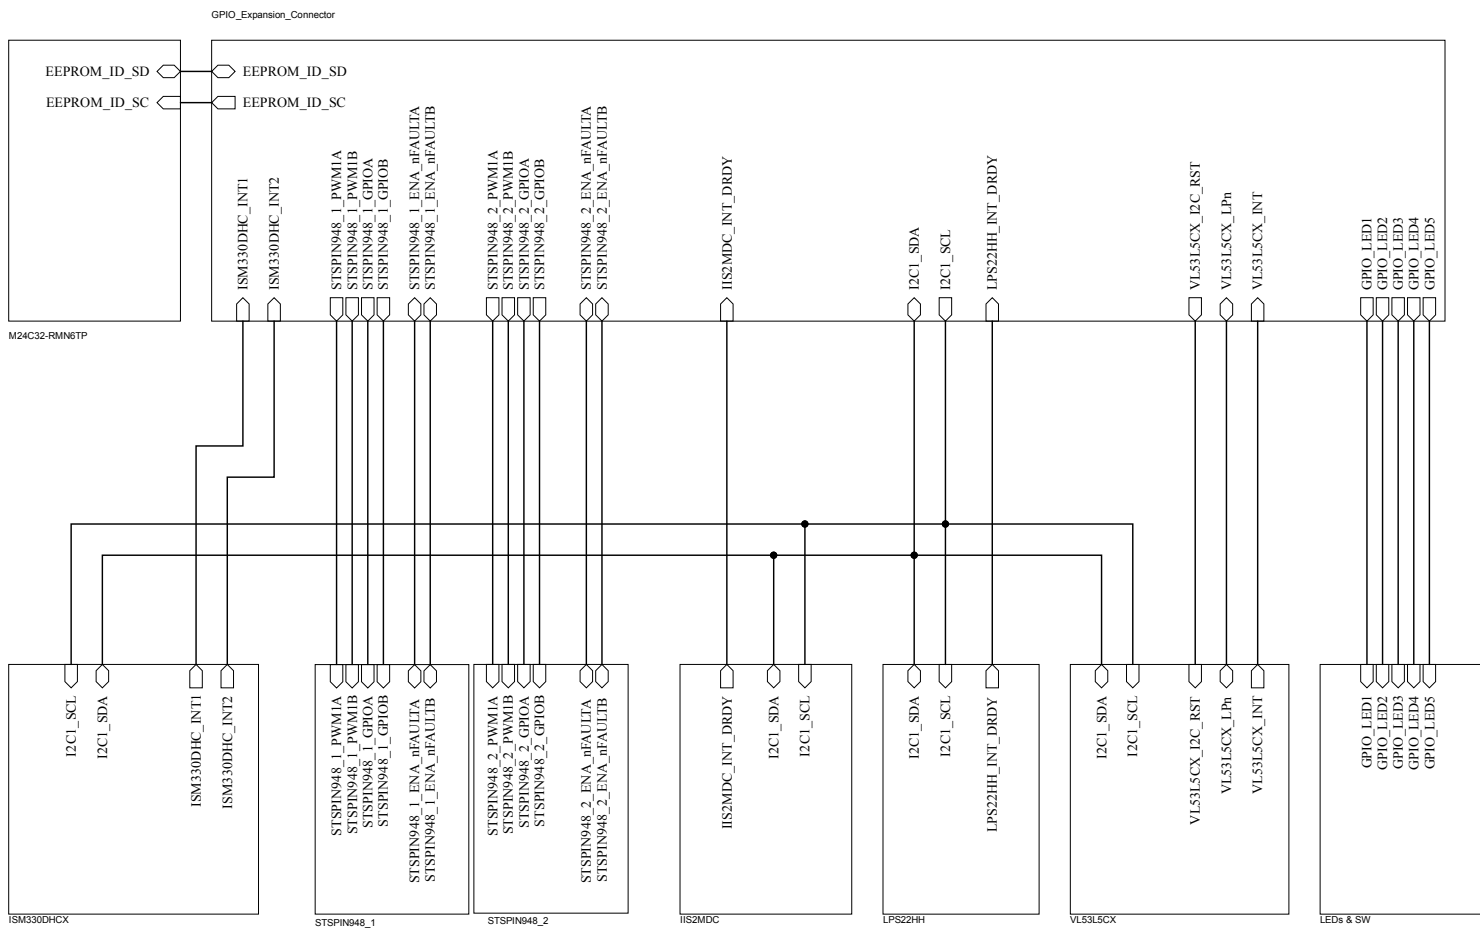

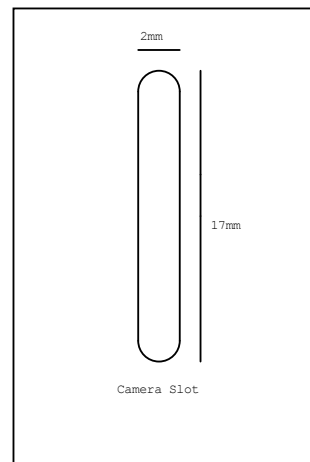

Jumper	EEPROM (WC)
1-2	WRITE_ENABLE
2-3 (DEFAULT)	WRITE_DISABLE



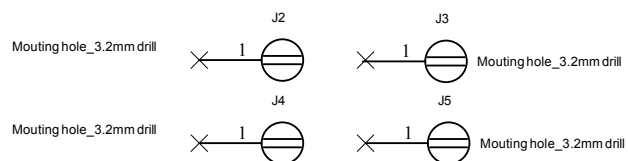


Figure 4. X-STM32MP-RBT01 circuit schematics (3 of 10)

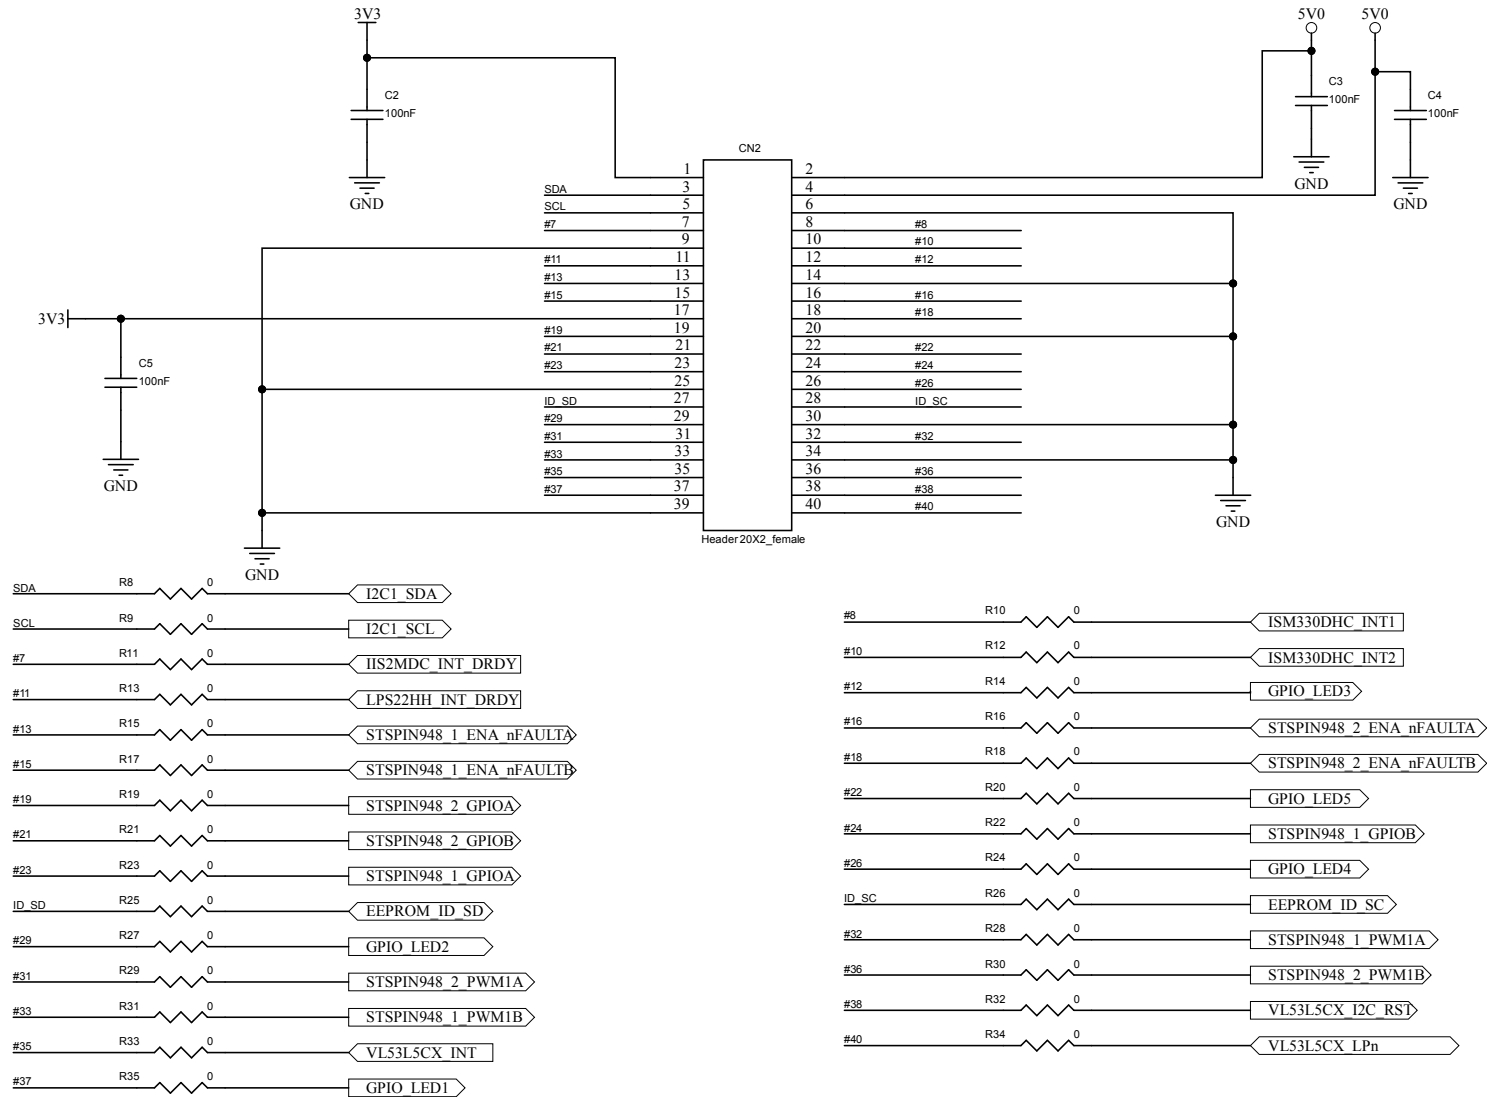


X-STM32MP-RBT01

Schematic diagrams

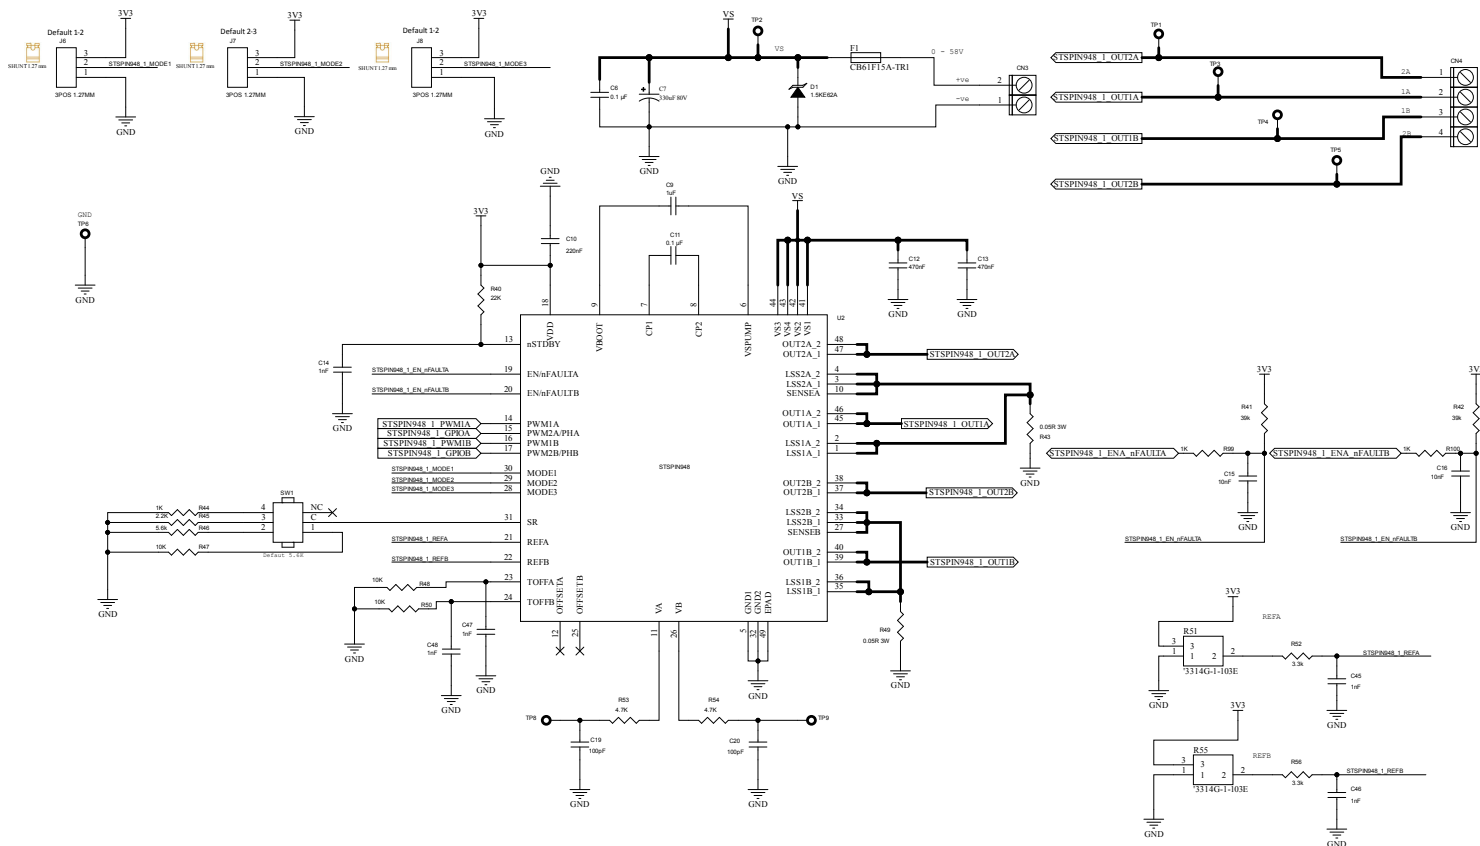

X-STM32MP-RBT01

Schematic diagrams

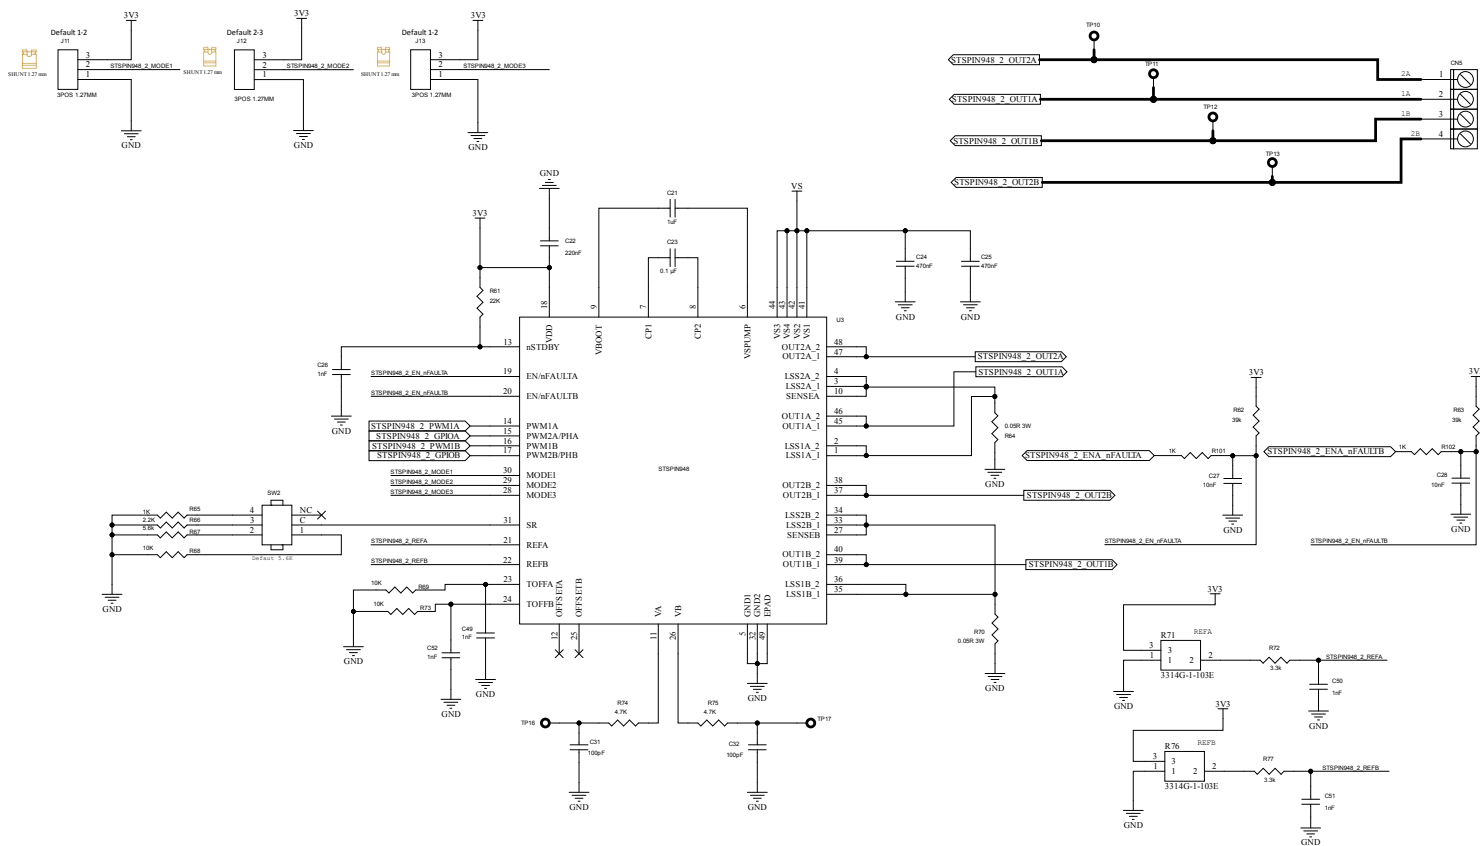


Accelerometer and Gyroscope






Figure 8. X-STM32MP-RBT01 circuit schematics (7 of 10)

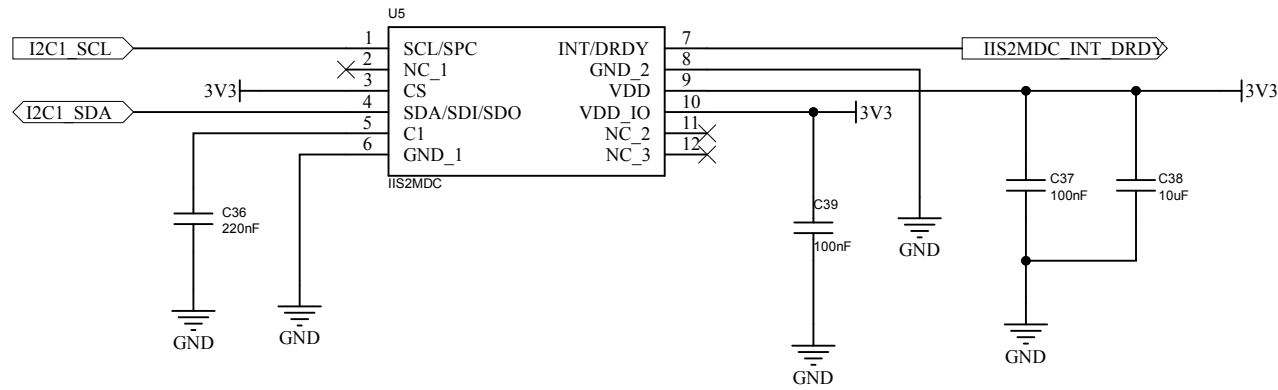


Magnetometer

Figure 9. X-STM32MP-RBT01 circuit schematics (8 of 10)

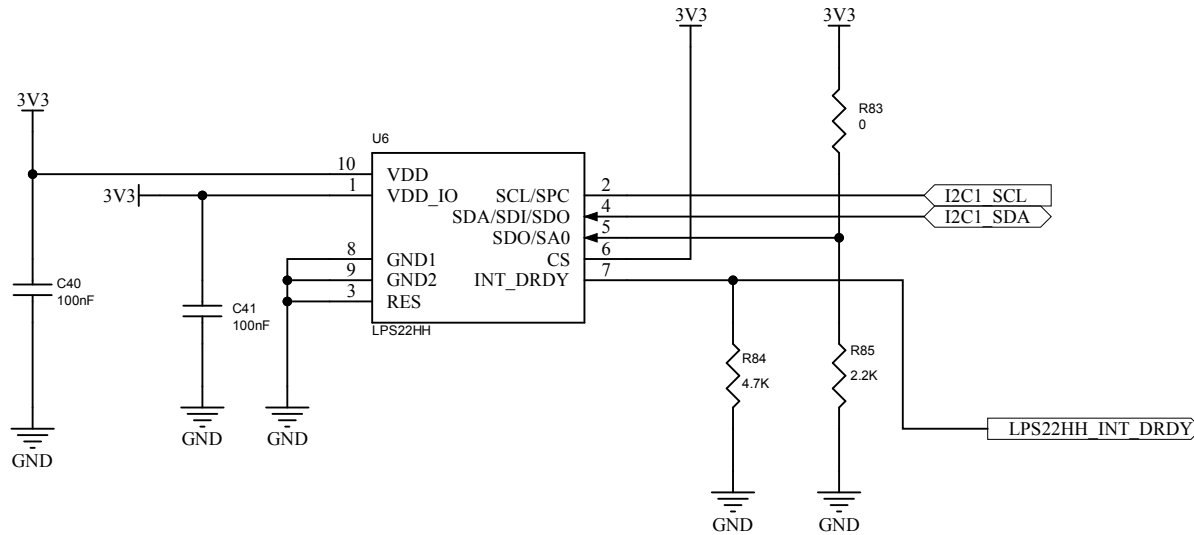

Pressure Sensor






Figure 10. X-STM32MP-RBT01 circuit schematics (9 of 10)

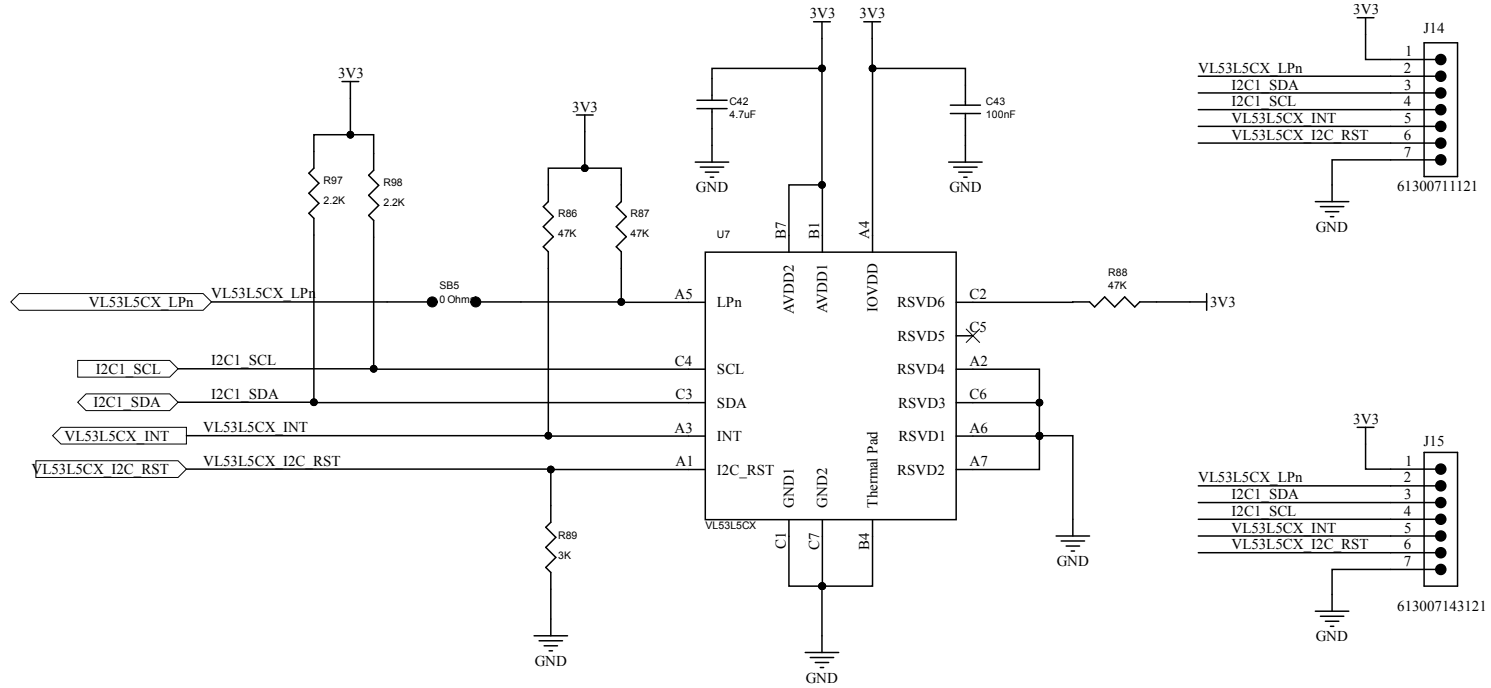

Time of Flight
Ranging Sensor



Figure 11. X-STM32MP-RBT01 circuit schematics (10 of 10)

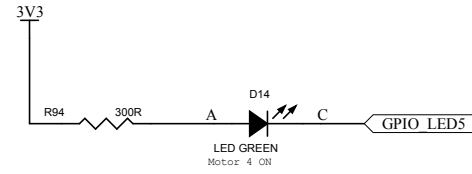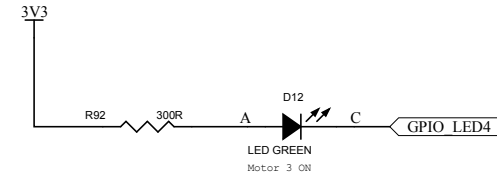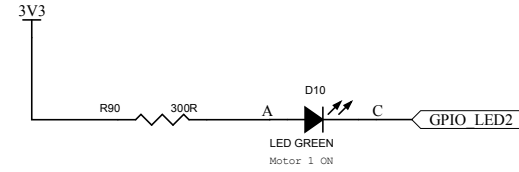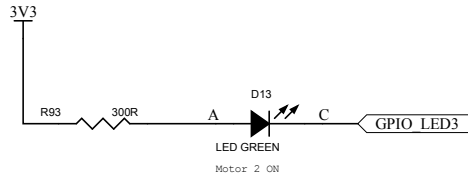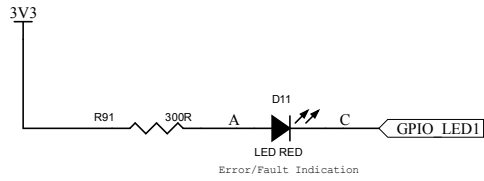

Revision history

Table 1. Document revision history

Date	Revision	Changes
20-Feb-2025	1	Initial release.

IMPORTANT NOTICE – READ CAREFULLY

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgment.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, refer to www.st.com/trademarks. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2025 STMicroelectronics – All rights reserved