



SPECIFICATION FOR APPROVAL


File No.: Q/FRK 0.GS.E.C42-A04

Product Name	Box-type Metallized Polypropylene Film Interference Suppression Capacitor (Class X2)
Product Type	C42(MKP62 Series)
Product Code	
Customer	
Customer Code	
Issue Date	2010-11

SURGE COMPONENTS, INC.
95 E. Jefryn Blvd., Deer Park, NY 11729
Tel: (631) 595-1818 * Fax: (631) 595-1283
www.surgecomponents.com

Metallized polypropylene film interference suppression capacitor(Class X2, 275Vac/305Vac)

■ Outline Drawing

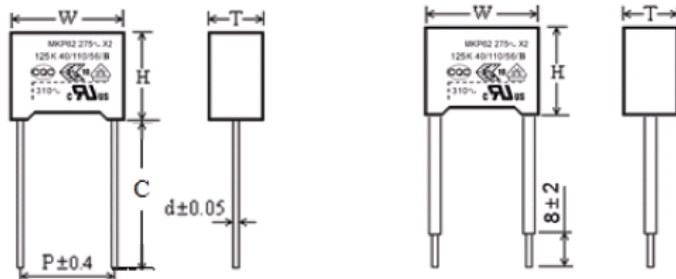

W±0.4mm, H±0.4mm, T±0.4mm

Lead Wire

Insulated Lead Wire(P≥10mm)

Note: There are two kind of the insulated lead wire:

- 1. Insulated rigid leads;
- 2. Insulated flexible leads.

Lead Wire Dia.	0.6	0.8	1.0
Insulated Lead Wire Gauge	AWG22	AWG20	AWG18

■ Features

- Metallized polypropylene structure
- Withstanding overvoltage stressing
- Excellent active and passive flame resistant abilities
- Widely used in across-the-line, interference suppression circuit, etc.

■ Safety Approvals

•	CQC	GB/T 14472-1998, X2, 275/305VAC, 0.0010μF~10.0μF, 40/110/56/B Certificate No.: CQC03001002875
•	ENEC-VDE	EN 60384-14:2005, X2, 275/305VAC, 0.0010μF~10.0μF, 40/110/56/B Certificate No.: 40000358
•	UL/CUL	UL1414, CSA C22.2 No.1, 250 VAC, 0.001μF to 1.0μF Certificate No.: E186600
		UL1283, CSA C22.2 No.8, 310 VAC, 0.001μF to 45.0μF Certificate No.: E186662
• CB TEST CERTIFICATE		IEC 60384-14:2005, X2, 275/305 VAC, 0.001μF~10.0μF, 40/110/56/B Certificate No.: DE1--12559/M2, DE1-40344

■ Specifications

Class	Class X2		
Climatic Category/Passive Flammability Class	40/110/56/B		
Operating Temperature Range	-40°C ~ +110°C		
Rated Voltage (U _R)	275/305Vac(ENEC/CQC), 250Vac(UL1414), 310Vac(UL1283)		
Maximum continuous DC voltage	630Vdc		
Capacitance Range	0.0010μF~10.0μF		
Capacitance Tolerance	±10%(K), ±20%(M)		
Voltage Proof	Between Terminals:	2 000Vdc(2s) C _R ≤1.0μF	
	Between Terminals To Case:	1 800Vdc(2s) C _R >1.0μF	
Insulation Resistance	≥15 000MΩ, C _R ≤0.33μF	(20°C, 100V, 1min)	
	≥5 000s, C _R >0.33μF		
Dissipation Factor	0.0010μF≤C _R ≤0.47μF	≤10×10 ⁻⁴ (1kHz, 20°C)	≤20×10 ⁻⁴ (10kHz, 20°C)
	0.47μF<C _R ≤1.0μF	≤20×10 ⁻⁴ (1kHz, 20°C)	≤40×10 ⁻⁴ (10kHz, 20°C)
	1.0μF<C _R ≤10μF	≤30×10 ⁻⁴ (1kHz, 20°C)	-----

■ Part number system

The 18 digits part number is formed as follow:

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
C	4	2															

Digit 1 to 3 Series code

C42=MKP62

Digit 4 to 5 A.C. rated voltage

P2=275V Q2=305V

Digit 6 to 8 Rated capacitance value

For example : 103=10×10³ pF= 0.01μF

Digit 9 Capacitance tolerance

K=±10%, M=±20%

Digit 10 Pitch

3=7.5mm 4=10.0mm 6=15.0mm

9=22.5mm B=27.5mm F=37.5mm

Digit 11 Internal use

Digit 12 to 15 Lead form and packaging code

Digit 16 to 18 Internal use

Table1 Lead form and packaging code

Digit 12		Digit 13		Digit 14		Digit 15	
code	explanation	code	explanation	code	explanation	code	explanation
A	ammo-pack	3	F=7.5mm	0	straight	1	each cap. among two consecutive holes P3=12.7mm, H=18.5mm(For pitch=7.5mm)
		4	F=10.0mm			5	P3=25.4mm;H=18.5mm (For pitch=10/15mm) (Detail parameter refer to page 15)
		6	F=15.0mm				
C	straight lead "C" in the figure above	code	explanation	0		0	Length tolerance ±0.5mm Or standard length
		00	standard lead length (18mm~26mm)				
		45	lead length 4.5mm				

■ Dimensions(mm)

Miniature version

275Vac [#]						
C (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.4	d ±0.05	Part number
0.0010	10.5	9.0	4.0	7.5	0.6	C42P2102-30****++
0.0012	10.5	9.0	4.0	7.5	0.6	C42P2122-30****++
0.0015	10.5	9.0	4.0	7.5	0.6	C42P2152-30****++
0.0018	10.5	9.0	4.0	7.5	0.6	C42P2182-30****++
0.0022	10.5	9.0	4.0	7.5	0.6	C42P2222-30****++
0.0027	10.5	9.0	4.0	7.5	0.6	C42P2272-30****++
0.0033	10.5	9.0	4.0	7.5	0.6	C42P2332-30****++
0.0039	10.5	9.0	4.0	7.5	0.6	C42P2392-30****++
0.0047	10.5	9.0	4.0	7.5	0.6	C42P2472-30****++
0.0056	10.5	9.0	4.0	7.5	0.6	C42P2562-30****++
0.0068	10.5	9.0	4.0	7.5	0.6	C42P2682-30****++
0.0082	10.5	9.0	4.0	7.5	0.6	C42P2822-30****++
0.010	10.5	9.0	4.0	7.5	0.6	C42P2103-30****++
0.012	10.5	9.0	4.0	7.5	0.6	C42P2123-30****++
0.015	10.5	9.0	4.0	7.5	0.6	C42P2153-30****++
0.018	10.5	9.0	4.0	7.5	0.6	C42P2183-30****++
0.022	10.5	9.0	4.0	7.5	0.6	C42P2223-30****++
0.027	10.5	11.0	5.0	7.5	0.6	C42P2273-30****++
0.033	10.5	11.0	5.0	7.5	0.6	C42P2333-30****++
0.039	10.5	12.0	6.0	7.5	0.6	C42P2393-30****++
0.047	10.5	12.0	6.0	7.5	0.6	C42P2473-30****++
0.0047	13.0	9.0	4.0	10.0	0.6	C42P2472-40****++
0.0056	13.0	9.0	4.0	10.0	0.6	C42P2562-40****++
0.0068	13.0	9.0	4.0	10.0	0.6	C42P2682-40****++
0.0082	13.0	9.0	4.0	10.0	0.6	C42P2822-40****++
0.010	13.0	9.0	4.0	10.0	0.6	C42P2103-40****++
0.012	13.0	9.0	4.0	10.0	0.6	C42P2123-40****++
0.015	13.0	9.0	4.0	10.0	0.6	C42P2153-40****++
0.018	13.0	9.0	4.0	10.0	0.6	C42P2183-40****++
0.022	13.0	9.0	4.0	10.0	0.6	C42P2223-40****++
0.027	13.0	9.0	4.0	10.0	0.6	C42P2273-40****++
0.033	13.0	9.0	4.0	10.0	0.6	C42P2333-4S****++
0.039	13.0	9.0	4.0	10.0	0.6	C42P2393-4S****++
0.047	13.0	9.0	4.0	10.0	0.6	C42P2473-4S****++
0.056	13.0	11.0	5.0	10.0	0.6	C42P2563-4S****++
0.068	13.0	11.0	5.0	10.0	0.6	C42P2683-4S****++
0.082	13.0	11.0	5.0	10.0	0.6	C42P2823-4S****++
0.10M	13.0	11.0	5.0	10.0	0.6	C42P2104M4S****++
0.10K	13.0	12.0	6.0	10.0	0.6	C42P2104K4S****++
0.12	13.0	13.0	7.0	10.0	0.6	C42P2124-4S****++
0.15	13.0	13.0	7.0	10.0	0.6	C42P2154-4S****++
0.18	13.0	14.0	8.0	10.0	0.6	C42P2184-4S****++
0.22M	13.0	14.0	8.0	10.0	0.6	C42P2224M4S****++

275Vac [#]						
C (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.4	d ±0.05	Part number
0.010	17.5	9.5	5.0	15.0	0.6	C42P2103-6A****++
0.012	17.5	9.5	5.0	15.0	0.6	C42P2123-6A****++
0.015	17.5	9.5	5.0	15.0	0.6	C42P2153-6A****++
0.018	17.5	9.5	5.0	15.0	0.6	C42P2183-6A****++
0.022	17.5	9.5	5.0	15.0	0.6	C42P2223-6A****++
0.027	17.5	9.5	5.0	15.0	0.6	C42P2273-6A****++
0.033	17.5	9.5	5.0	15.0	0.6	C42P2333-6A****++
0.039	17.5	9.5	5.0	15.0	0.6	C42P2393-6A****++
0.047	17.5	9.5	5.0	15.0	0.6	C42P2473-6A****++
0.056	17.5	9.5	5.0	15.0	0.6	C42P2563-6A****++
0.068	17.5	9.5	5.0	15.0	0.6	C42P2683-6A****++
0.082	17.5	9.5	5.0	15.0	0.6	C42P2823-6A****++
0.10M	17.5	9.5	5.0	15.0	0.6	C42P2104M6A****++
0.10	17.5	11.0	5.0	15.0	0.6	C42P2104-6S****++
0.12	17.5	11.0	5.0	15.0	0.6	C42P2124-6S****++
0.15M	17.5	11.0	5.0	15.0	0.6	C42P2154M6S****++
0.15K	17.5	12.0	6.0	15.0	0.6	C42P2154K6S****++
0.18	17.5	12.0	6.0	15.0	0.6	C42P2184-6S****++
0.22M	17.5	12.0	6.0	15.0	0.6	C42P2224M6S****++
0.22K	17.5	12.5	9.0	15.0	0.6	C42P2224K6A****++
0.22K	17.5	13.5	6.0	15.0	0.6	C42P2224K6B****++
0.22K	17.5	12.0	7.0	15.0	0.6	C42P2224K6C****++
0.22K	17.5	13.5	7.5	15.0	0.6	C42P2224K6S****++
0.27	17.5	13.5	7.5	15.0	0.6	C42P2274-6S****++
0.33M	17.5	13.5	7.5	15.0	0.6	C42P2334M6S****++
0.33K	17.5	14.0	8.0	15.0	0.6	C42P2334K6S****++
0.33M	17.5	12.5	9.0	15.0	0.6	C42P2334M6A****++
0.33M	17.5	17.5	6.0	15.0	0.6	C42P2334M6B****++
0.33K	17.5	18.5	7.5	15.0	0.8	C42P2334K6A****++
0.39	17.5	14.5	8.5	15.0	0.6	C42P2394-6S****++
0.47M	17.5	14.5	8.5	15.0	0.6	C42P2474M6S****++
0.47	17.5	18.5	7.5	15.0	0.8	C42P2474-6A****++
0.47K	17.5	16.0	10.0	15.0	0.8	C42P2474K6S****++
0.56	17.5	16.0	10.0	15.0	0.8	C42P2564-6A****++
0.56	17.5	19.0	11.0	15.0	0.8	C42P2564-6S****++
0.60	17.5	19.0	11.0	15.0	0.8	C42P2604-6S****++
0.68	17.5	19.0	11.0	15.0	0.8	C42P2684-6S****++
0.82M	17.5	19.0	11.0	15.0	0.8	C42P2824M6S****++

Note: 1. “-”=capacitance tolerance code, M=±20%,K=±10%

2. “****”=lead form and packaging code (refer to table 1)

3. “#”when the rated voltage is 305VAC,the digit 4~5 is Q2.

■ Dimensions(mm)

Miniature version

275Vac [#]						
C (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.4	d ±0.05	Part number
0.15	26.5	15.0	6.0	22.5	0.8	C42P2154-90****+++
0.18	26.5	15.0	6.0	22.5	0.8	C42P2184-90****+++
0.22	26.5	15.0	6.0	22.5	0.8	C42P2224-9S****+++
0.27	26.5	15.0	6.0	22.5	0.8	C42P2274-9S****+++
0.33	26.5	15.0	6.0	22.5	0.8	C42P2334-9S****+++
0.39	26.5	15.0	6.0	22.5	0.8	C42P2394-9S****+++
0.47M	26.5	15.0	6.0	22.5	0.8	C42P2474M9S****+++
0.47K	26.5	16.0	7.0	22.5	0.8	C42P2474K9S****+++
0.56	26.5	16.0	7.0	22.5	0.8	C42P2564-9S****+++
0.60	26.5	17.0	8.5	22.5	0.8	C42P2604-9S****+++
0.68	26.5	17.0	8.5	22.5	0.8	C42P2684-9S****+++
0.82	26.5	18.5	10.0	22.5	0.8	C42P2824-9S****+++
1.0	26.5	18.5	10.0	22.5	0.8	C42P2105-9S****+++
1.2	26.5	20.0	11.0	22.5	0.8	C42P2125-9S****+++
1.5M	26.5	20.0	11.0	22.5	0.8	C42P2155M9S****+++
1.5K	26.5	22.0	12.0	22.5	0.8	C42P2155K9S****+++
1.8	26.5	24.5	15.5	22.5	0.8	C42P2185-9S****+++
2.2	26.5	24.5	15.5	22.5	0.8	C42P2225-9S****+++
0.47	32.0	18.0	9.0	27.5	0.8	C42P2474-B0****+++
0.56	32.0	18.0	9.0	27.5	0.8	C42P2564-B0****+++
0.68	32.0	18.0	9.0	27.5	0.8	C42P2684-B0****+++
0.82	32.0	18.0	9.0	27.5	0.8	C42P2824-BS****+++
1.0	32.0	18.0	9.0	27.5	0.8	C42P2105-BS****+++
1.2	32.0	20.0	11.0	27.5	0.8	C42P2125-BS****+++
1.5	32.0	20.0	11.0	27.5	0.8	C42P2155-BS****+++
1.8	32.0	22.0	13.0	27.5	0.8	C42P2185-BS****+++
2.2M	32.0	22.0	13.0	27.5	0.8	C42P2225MBS****+++
2.2K	32.0	25.0	13.0	27.5	0.8	C42P2225KBS****+++
2.7	32.0	28.0	14.0	27.5	0.8	C42P2275-BS****+++
3.3M	32.0	24.5	15.0	27.5	0.8	C42P2335MBB****+++
3.3K	32.0	28.0	17.0	27.5	0.8	C42P2335KBB****+++
3.3	32.0	30.0	16.0	27.5	0.8	C42P2335-BA****+++
3.3	32.0	33.0	18.0	27.5	0.8	C42P2335-BS****+++
3.9	32.0	33.0	18.0	27.5	0.8	C42P2395-BS****+++
4.7M	32.0	33.0	18.0	27.5	0.8	C42P2475MBS****+++
4.7 K	32.0	33.0	18.0	27.5	0.8	C42P2475KBA****+++
4.7	32.0	31.0	21.0	27.5	0.8	C42P2475KBB****+++
4.7K	32.0	37.0	22.0	27.5	0.8	C42P2475KBS****+++
5.6	32.0	37.0	22.0	27.5	0.8	C42P2565-BS****+++
6.8M	32.0	37.0	22.0	27.5	0.8	C42P2685MBS****+++

275Vac [#]						
C (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.4	d ±0.05	Part number
1.5	41.0	22.0	11.0	37.5	1.0	C42P2155-FS****+++
1.8	41.0	22.0	11.0	37.5	1.0	C42P2185-FS****+++
2.2	41.0	24.0	13.0	37.5	1.0	C42P2225-FS****+++
2.7	41.0	24.0	13.0	37.5	1.0	C42P2275-FS****+++
3.3	42.0	28.0	14.0	37.5	1.0	C42P2335-FS****+++
3.9	41.0	30.0	16.0	37.5	1.0	C42P2395-FS****+++
4.7	41.0	30.0	16.0	37.5	1.0	C42P2475-FS****+++
5.6	41.0	33.5	18.5	37.5	1.0	C42P2565-FS****+++
6.8	41.0	33.5	18.5	37.5	1.0	C42P2685-FS****+++
8.2	41.0	37.0	22.0	37.5	1.0	C42P2825-FS****+++
10.0M	41.0	37.0	22.0	37.5	1.0	C42P2106MFS****+++
10.0K	41.0	41.0	26.0	37.5	1.0	C42P2106KFS****+++

Note: 1. “-”=capacitance tolerance code, M=±20%,K=±10%

2. “****”=lead form and packaging mode code (refer to table 1)

3. ”#”when the rated voltage is 305VAC,the digit 4~5 is Q2.

■ Dimensions(mm)

275Vac [#]						
C (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.4	d ±0.05	Part number
0.033	13.0	11.0	5.0	10.0	0.6	C42P2333-40*****++
0.039	13.0	11.0	5.0	10.0	0.6	C42P2393-40*****++
0.047	13.0	11.0	5.0	10.0	0.6	C42P2473-40*****++
0.056	13.0	11.0	5.0	10.0	0.6	C42P2563-40*****++
0.068	13.0	12.0	6.0	10.0	0.6	C42P2683-40*****++
0.082	13.0	12.0	6.0	10.0	0.6	C42P2823-40*****++
0.10	13.0	12.0	6.0	10.0	0.6	C42P2104-40*****++
0.12	13.0	14.0	8.0	10.0	0.6	C42P2124-40*****++
0.15	13.0	14.0	8.0	10.0	0.6	C42P2154-40*****++
0.010	17.5	11.0	5.0	15.0	0.8	C42P2103-60*****++
0.012	17.5	11.0	5.0	15.0	0.8	C42P2123-60*****++
0.015	17.5	11.0	5.0	15.0	0.8	C42P2153-60*****++
0.018	17.5	11.0	5.0	15.0	0.8	C42P2183-60*****++
0.022	17.5	11.0	5.0	15.0	0.8	C42P2223-60*****++
0.027	17.5	11.0	5.0	15.0	0.8	C42P2273-60*****++
0.033	17.5	11.0	5.0	15.0	0.8	C42P2333-60*****++
0.039	17.5	11.0	5.0	15.0	0.8	C42P2393-60*****++
0.047	17.5	11.0	5.0	15.0	0.8	C42P2473-60*****++
0.056	17.5	11.0	5.0	15.0	0.8	C42P2563-60*****++
0.068	17.5	11.0	5.0	15.0	0.8	C42P2683-60*****++
0.082	17.5	11.0	5.0	15.0	0.8	C42P2823-60*****++
0.10	17.5	11.0	5.0	15.0	0.8	C42P2104-60*****++
0.12	17.5	12.0	6.0	15.0	0.8	C42P2124-60*****++
0.15	17.5	12.0	6.0	15.0	0.8	C42P2154-60*****++
0.18	17.5	13.5	7.5	15.0	0.8	C42P2184-60*****++
0.22	17.5	13.5	7.5	15.0	0.8	C42P2224-60*****++
0.27	17.5	14.5	8.5	15.0	0.8	C42P2274-60*****++
0.33	17.5	16.0	10.0	15.0	0.8	C42P2334-60*****++
0.39	17.5	19.0	11.0	15.0	0.8	C42P2394-60*****++
0.47	17.5	19.0	11.0	15.0	0.8	C42P2474-60*****++

275Vac [#]						
C (μF)	W ±0.4	H ±0.4	T ±0.4	P ±0.4	d ±0.05	Part number
0.22	26.5	15.0	6.0	22.5	0.8	C42P2224-90*****++
0.27	26.5	16.0	7.0	22.5	0.8	C42P2274-90*****++
0.33	26.5	16.0	7.0	22.5	0.8	C42P2334-90*****++
0.39	26.5	17.0	8.5	22.5	0.8	C42P2394-90*****++
0.47	26.5	17.0	8.5	22.5	0.8	C42P2474-90*****++
0.56	26.5	18.5	10.0	22.5	0.8	C42P2564-90*****++
0.68	26.5	18.5	10.0	22.5	0.8	C42P2684-90*****++
0.82	26.5	22.0	12.0	22.5	0.8	C42P2824-90*****++
1.0	26.5	22.0	12.0	22.5	0.8	C42P2105-90*****++
1.2	26.5	24.5	15.5	22.5	0.8	C42P2125-90*****++
1.5	26.5	24.5	15.5	22.5	0.8	C42P2155-90*****++
0.82	32.0	20.0	11.0	27.5	0.8	C42P2824-B0*****++
1.0	32.0	20.0	11.0	27.5	0.8	C42P2105-B0*****++
1.2	32.0	22.0	13.0	27.5	0.8	C42P2125-B0*****++
1.5	32.0	22.0	13.0	27.5	0.8	C42P2155-B0*****++
1.8	32.0	24.5	15.0	27.5	0.8	C42P2185-B0*****++
2.2	32.0	28.0	14.0	27.5	0.8	C42P2225-B0*****++
2.7	32.0	33.0	18.0	27.5	0.8	C42P2275-B0*****++
3.3	32.0	33.0	18.0	27.5	0.8	C42P2335-B0*****++
3.9	32.0	37.0	22.0	27.5	0.8	C42P2395-B0*****++
4.7	32.0	37.0	22.0	27.5	0.8	C42P2475-B0*****++
1.8	41.0	26.0	12.0	37.5	1.0	C42P2185-F0*****++
2.2M	41.0	26.0	12.0	37.5	1.0	C42P2225MF0*****++
2.2K	42.0	28.0	14.0	37.5	1.0	C42P2225KF0*****++
2.7	42.0	28.0	14.0	37.5	1.0	C42P2275-F0*****++
3.3	41.0	30.0	16.0	37.5	1.0	C42P2335-F0*****++
3.9	41.0	32.0	17.0	37.5	1.0	C42P2395-F0*****++
4.7	41.0	33.5	18.5	37.5	1.0	C42P2475-F0*****++
5.6	41.0	37.0	22.0	37.5	1.0	C42P2565-F0*****++
6.8	41.0	37.0	22.0	37.5	1.0	C42P2685-F0*****++
8.2	41.0	41.0	26.0	37.5	1.0	C42P2825-F0*****++
10.0	41.0	43.0	28.0	37.5	1.0	C42P2106-F0*****++

- Note: 1. “-”=capacitance tolerance code, M=±20%,K=±10%
 2. “*****”=lead form and packaging mode code (refer to table 1)
 3. “#”when the rated voltage is 305VAC,the digit 4~5 is Q2.
 4. For new design, please refer to reduced sizes

■ **Maximum permissible voltage change per unit of time**

Rated Voltage (Vac)	Max dV/dt(V/us)					
	P=7.5mm	P=10mm	P=15mm	P=22.5mm	P=27.5mm	P=37.5mm
275/305	500	500	400	200	150	100


Note:

1. Rated voltage pulse slope $(dV/dt)_R$ at rated voltage.
2. If the working voltage(U) is lower than the rated voltage(U_R),the capacitor can be worked at a higher dV/dt. In this case, the maximum allowed dV/dt is obtain by multiplying the right value with U_R/U .

■ **Impedance Vs. Frequency**

TYPICAL GRAPHS

Z=f(f) Typical values

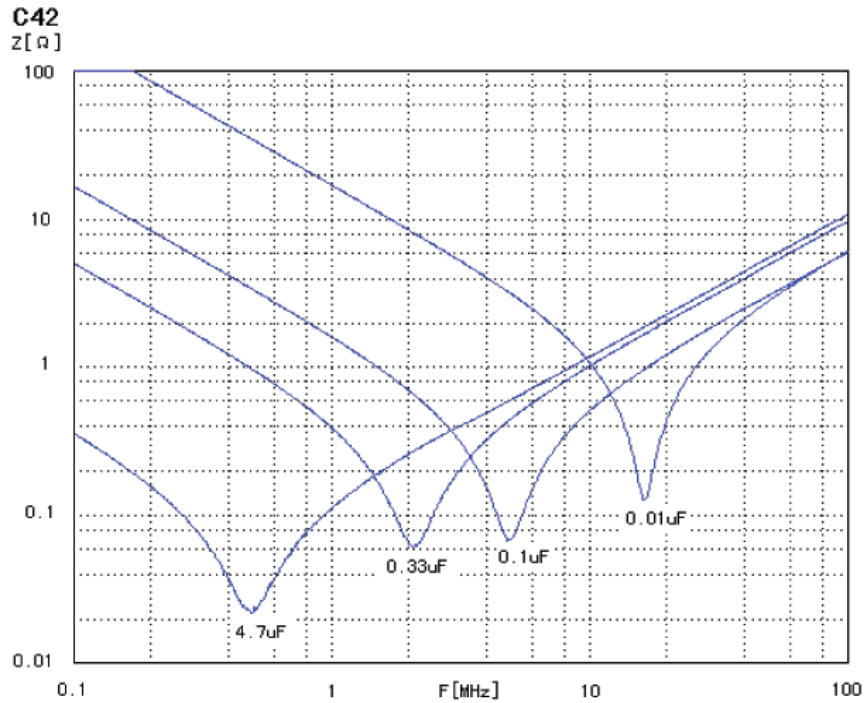


■ Test Method And Performance

No.	Item	Performance	Test Method (IEC 60384-14)
1	Solderability	Good quality of tinning	Solder temperature: 245°C ±5°C Immersion time: 2.0s±0.5s
2	Terminal strength	There shall be no visible damage	Tense: 0.50<d≤0.80, 10N 0.80<d≤1.25, 20N Bend: 0.50<d≤0.80, 5N 0.80<d≤1.25, 10N The terminals shall be bent 2 times in each direction
3	Resistance to solder heat	There shall be no visible damage ΔC/C ≤±5%(relative to the initial value)	Solder temperature:260°C±5°C Immersion time: 10s±1s
4	Solvent resistance of the marking	The marking shall be legible	Solvent: Industrial isopropanol. Solvent temperature:23°C±5°C Dipping time: 5min±0.5min Condition:scrub Scrub material:absorbent cotton Reverting time:No
5	Initial measurement	Capacitance、Tgδ	
	Rapid change of temperature	There shall be no evidence of deterioration.	θ _A =-40°C, θ _B =+110°C 5 cycles Duration: t=30min
	Vibration	There shall be no evidence of deterioration.	Amplitude 0.75mm or acceleration 100m/s ² (whichever is the smaller severity), f: 10Hz to 500Hz.Three directions, 2h for each direction, total 6h.
	Bump	There shall be no evidence of deterioration.	4 000 times, Acceleration: 400m/s ² , Pulse duration, 6ms
	Final measurement	There shall be no visible damage ΔC/C ≤±5%(relative to the initial value)	
6	Climate sequence	Initial measurement	
		Dry heat	+110°C, 16h
		Damp heat,Cyclic	Test Db, Severity: b, the first cycle
		Cold	-40°C, 2h
		Damp heat, cyclic other	Test Db, Severity b, the other cycles,
	Final measurement	There shall be no visible damage, legible marking ΔC/C ≤±5%(relative to the initial value) Increase of tgδ: C _R ≤1μF: ≤0.008 (10kHz) C _R >1μF: ≤0.005 (1kHz) Dielectric strength : there shall be no permanent breakdown or flashover I.R.: ≥ 50% of the rated value	


No.	Item	Performance	Test Method (IEC 60384-14)
7	Damp heat steady state	<p>There shall be no visible damage, legible marking</p> <p>$\Delta C/C \leq \pm 5\%$ (relative to the initial value)</p> <p>Increase of $\text{tg}\delta$: $C_R \leq 1\mu\text{F}$: ≤ 0.008 (10kHz) $C_R > 1\mu\text{F}$: ≤ 0.005 (1kHz)</p> <p>Dielectric strength : there shall be no permanent breakdown or flashover</p> <p>I.R.: $\geq 50\%$ of the rated value</p>	<p>Temperature: $40^\circ\text{C} \pm 2^\circ\text{C}$</p> <p>Humidity: $93 \begin{smallmatrix} +2 \\ -3 \end{smallmatrix} \% \text{RH}$</p> <p>Duration: 56 days</p>
8	Impulse voltage	<p>There are three or more waveforms which indicate that no self-heating breakdown have occurred when it is monitored by the monitor</p>	<p>Each individual capacitor shall be subjected to 24 impulses of the same polarity (when any three successive impulses are shown by the monitor to have a wave form indicating that no self-healing breakdown have taken place the impulses can be stopped), the time between impulses shall not be less than 10S, and the peak value of the voltage impulse: 2.5kV (suitable for $C_R \leq 1\mu\text{F}$; When $C_R > 1\mu\text{F}$, the capacitor can endure pulse voltage value is $2.5/\sqrt{C_R}$ kV)</p>
9	Endurance	<p>There shall be no visible damage, legible marking</p> <p>$\Delta C/C \leq \pm 10\%$ (relative to the initial value)</p> <p>Increase of $\text{tg}\delta$: $C_R \leq 1\mu\text{F}$: ≤ 0.008 (10kHz) $C_R > 1\mu\text{F}$: ≤ 0.005 (1kHz)</p> <p>Dielectric strength : There shall be no breakdown or flashover</p> <p>I.R. : $\geq 50\%$ of the rated value</p>	<p>$+110^\circ\text{C}$, $1.25U_R$ Va.c., 1 000h</p> <p>The voltage shall be subjected to 1000Vrms for 0.1s every one hour during test.</p>
10	Charging and discharging	<p>$\Delta C/C \leq \pm 10\%$ (relative to the initial value)</p> <p>Increase of $\text{tg}\delta$: $C_R \leq 1\mu\text{F}$: ≤ 0.008 (10kHz) $C_R > 1\mu\text{F}$: ≤ 0.005 (1kHz)</p> <p>I.R.: $\geq 50\%$ of the rated value</p>	<p>Times: 10 000</p> <p>Duration of charging: 0.5s</p> <p>Duration of discharging: 0.5s</p> <p>Charging voltage: $\sqrt{2}U_R$ V d.c.</p> <p>Charging resistance: $220/C_R$ (Ω) or the current $\leq 1.0\text{A}$ (whichever is the minor)</p> <p>Discharging resistance:</p> $R = \frac{\sqrt{2}U_R}{C_R \times \frac{dU}{dt}} (\Omega)$ <p>C_R: Capacitance (μF) dU/dt (V/us) : 100V/μs</p>

No.	Item	Performance	Test Method (IEC 60384-14)
11	Passive flammability	The flaming time of each capacitor shall not go beyond 10s after it is taken apart from the flame. Drop of each capacitor caused by flame shall not fire the tissue below.	Ref.item 4.17 Needle flame test The category of flammability: B Expose time: 1 time Capacitor Volume Exposing time 250<V(mm ³)≤500 20s 500<V(mm ³)≤1750 30s V(mm ³)>1750 60s
12	Active flammability	The cheese cloth around the capacitor shall not burn with a flame.	The specimens shall be individually wrapped in at least 1, but not more than 2, complete layers of cheesecloth, the cheesecloth shall be untreated pure cotton cloth. Each sample shall be subjected to 20 discharged, the interval between successive discharges shall be 5s. $U_i = 2.5kV_0^{+7}\%$ U_R be applied and be maintained for 120_0^{+10} s after the last discharge.


■ Marking

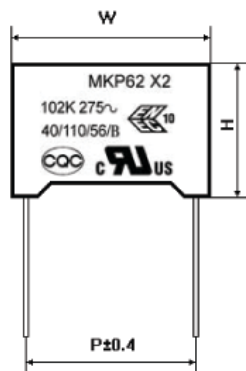

P=7.5 or 10.0mm

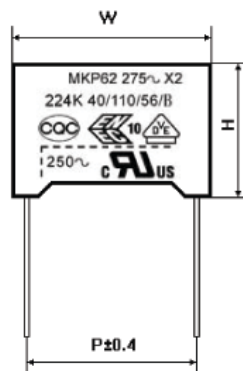

P≥15.0mm and $C_R \leq 1.0\mu F$

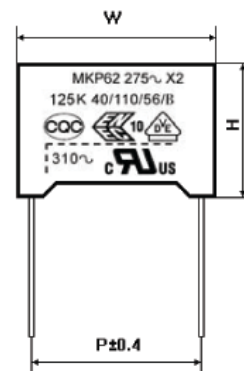

$C_R > 1.0\mu F$

Marking Introduction

Sign	explain	Sign	explain
	Brand		ENEC-VDE Approval
MKP62	Type		CQC Approval
275~	Rated voltage		UL,CUL Approval
X2	Class	250~/310~	Rated voltage (UL, UCL)
102/224/125K	Rated capacitance and tolerance	40/110/56/B	Climate category / Passive Flammability Class

■ Taping specification for box-type capacitors

▲ Outline Drawing

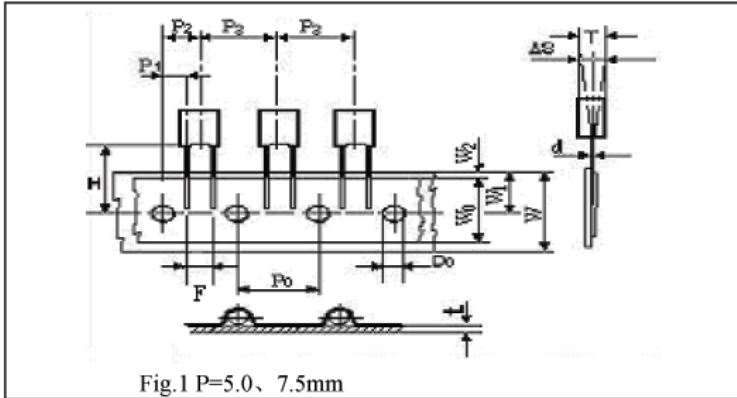


Fig.1 P=5.0、7.5mm

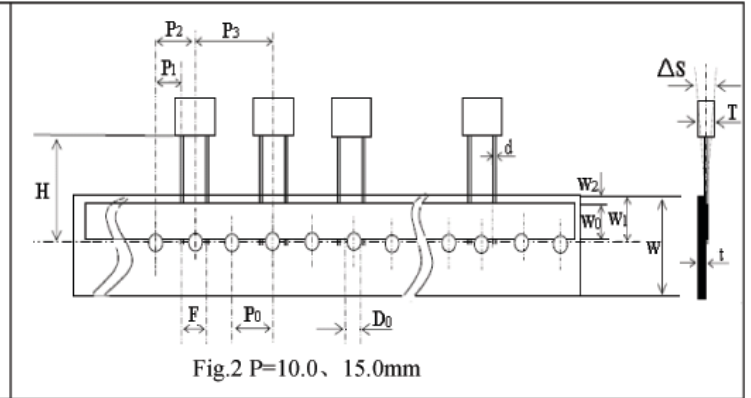


Fig.2 P=10.0、15.0mm

▲ Taping Dimensions(mm)

Technology index title	Code	Dimensions				Tolerance
		P=5.0	P=7.5	P=10.0	P=15.0	
Taping type	—	Fig 1	Fig 1	Fig2	Fig 2	—
Part number Digit12-15	Ammo-pack	A201	A301	A405	A605	
Taping pitch	P ₃	12.7	12.7	25.4	25.4	±1.0
Feed hole pitch	P ₀	12.7	12.7	12.7	12.7	±0.2
Center of wire	P ₁	3.85	2.6	7.7	5.2	±0.7
Center of body	P ₂	6.35	6.35	12.7	12.7	±1.3
Pitch of taping wire	F**	5.0	7.5	10.0	15.0	+0.6 -0.1
Component alignment	ΔS	0	0	0	0	±2.0
Height of component from tape center	H***	18.5	18.5	18.5	18.5	±0.5
Carrier tape width	W	18.0	18.0	18.0	18.0	+1.0 -0.5
Hold down tape width	W ₀	6min	12min	12min	12min	—
Hole position	W ₁	9.0	9.0	9.0	9.0	±0.5
Hold down tape position	W ₂	1.5max	1.5max	1.5max	1.5max	—
Feed hole dia.	D ₀	4.0	4.0	4.0	4.0	±0.2
Tape thickness	t	0.7	0.7	0.7	0.9	±0.2

▲ Packing Quantity

Pitch (mm)	Box thickness T(mm)	Ammo-pack (pcs/box)	
		Domestic	Export
5.0	2.5	2500	2 000
	3.5	1 700	1 500
	4.5	1 400	1 300
	5.0	1 200	1 000
	6.0	1 000	800
7.5	3.5	1 700	1 500
	4.0	1 500	1 300
	5.0	1 200	1 000
	6.0	1 000	800
10.0/ 15.0	4.0	750	650
	5.0	600	500
	6.0	500	450
15.0	7.5	400	350
	8.5	350	300
	10.0	300	250
	11.0	250	200


Note: * P₀=15mm is also available;

**F can be other lead spacing;


***H=16.5mm is available;

■ Packing sizes


1. Out packing box for bulk

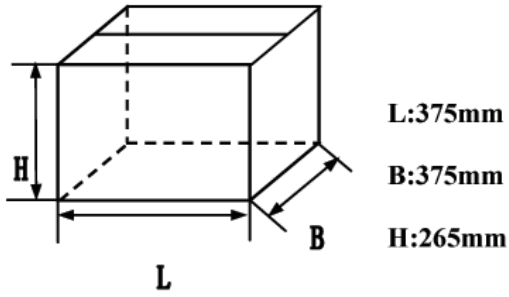

2. Inner packing box for bulk

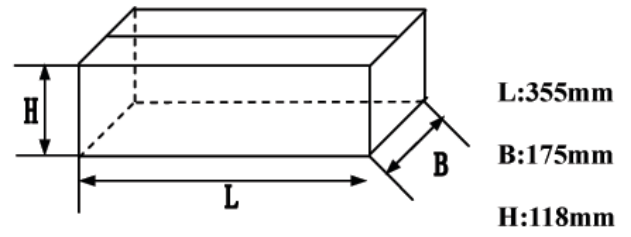

3. Box sizes for Ammo-pack



A=48 ± 3; B=260 ± 3; C=330 ± 3