




www.surgecomponents.com

MB2S thru MB12S

Miniature Glass Passivated Single-Phase Surface Mount Bridge Rectifiers
Reverse Voltage 200 to 1200 Volts Forward Current 0.5 Ampere


Features

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junctions
- ◆ High surge overload rating: 35A peak
- ◆ Saves space on printed circuit boards
- ◆ High temperature soldering guaranteed: 260°C/10 seconds.



Mechanical Data

- ◆ Case: Molded plastic body over passivated junctions
- ◆ Terminals: Plated leads solderable per MIL-STD-750, Method 2026
- ◆ Mounting Position: Any
- ◆ Weight: 0.078 oz., 0.22 g

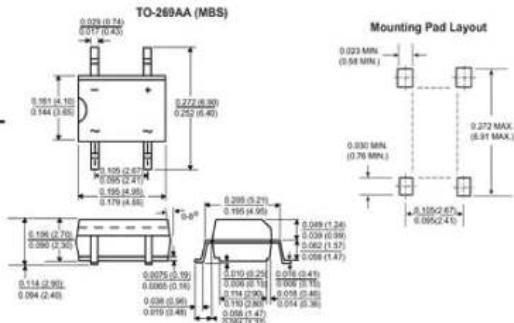

Package outline dimensions in inches (millimeters)

Maximum Ratings and Electrical Characteristics

($T_A=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbols	MB2S	MB4S	MB6S	MB8S	MB10S	MB12S	Units
Maximum repetitive peak reverse voltage	V_{RPM}	200	400	600	800	1000	1200	Volts
Maximum RMS voltage	V_{RMS}	140	280	420	560	700	840	Volts
Maximum DC blocking voltage	V_{DC}	200	400	600	800	1000	1200	Volts
Maximum average forward output rectified current (see Fig.1) on glass-epoxy P.C.B. on aluminum substrate	$I_{F(AV)}$				0.5 (1) 0.8 (2)			Amp
Peak forward surge current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}				35.0			Amps
Rating for fusing ($t < 8.3\text{ms}$)	F_t				5.0			A^2sec
Maximum instantaneous forward voltage drop per leg at 0.4A	V_F				1.0			Volt
Maximum DC reverse current at $T_A = 25^\circ\text{C}$ rated DC blocking voltage per leg	I_R				5.0 100			μA
Typical thermal resistance per leg	R_{JJA} R_{JJA} R_{JUL}				85 (1) 70 (2) 20 (1)			$^\circ\text{C}/\text{W}$
Typical junction capacitance per leg at 4.0V, 1.0MHz	C_J				13			pF
Operating junction and storage temperature range	T_J, T_{SG}				-55 to +150			$^\circ\text{C}$

Notes: 1. On glass epoxy P.C.B. mounted on 0.05×0.05 " (1.3 x 1.3mm) pads

2. On aluminum substrate P.C.B. with an area of $0.8" \times 0.8"$ (20 x 20mm) mounted on 0.05×0.05 " (1.3 x 1.3mm) solder pad



www.surgecomponents.com

RATINGS AND CHARACTERISTIC CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

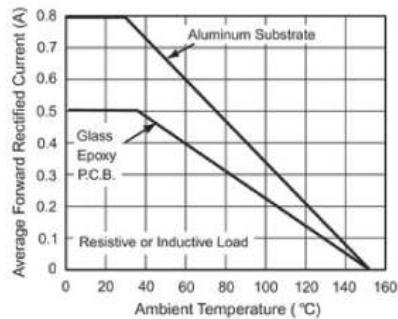


Figure 1. Derating Curve for Output Rectified Current

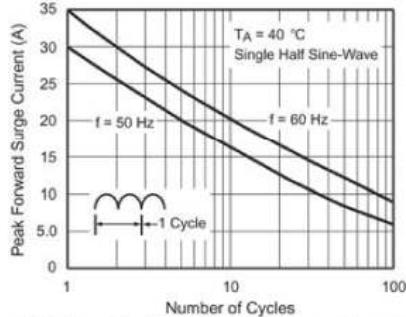


Figure 2. Maximum Non-Repetitive Peak Forward Surge Current Per Leg

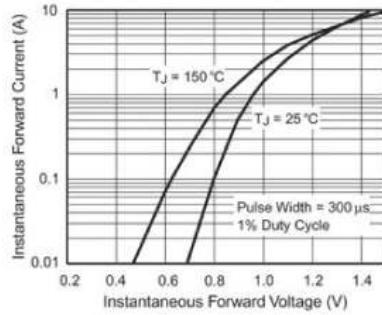


Figure 3. Typical Forward Voltage Characteristics Per Leg

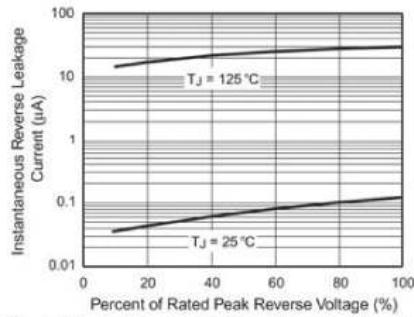


Figure 4. Typical Reverse Leakage Characteristics Per Leg

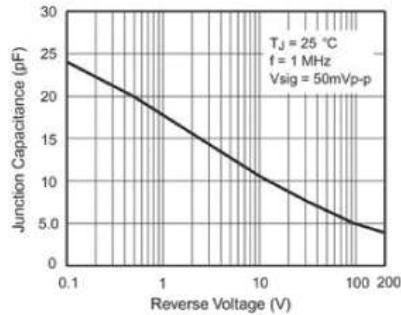


Figure 5. Typical Junction Capacitance Per Leg