

## **MINI BETACURVE (MBD)**

### Thermistor Probe

#### SPECIFICATIONS

- **NTC Temperature Sensor**
- **Fast time response**
- **Small tip diameter**
- **Various lead lengths available**

NTC Thermistor soldered to 30 AWG Solid Silver Plated Copper Wire with PVDF Insulation. Unit is potted in a polyimide tube with thermally conductive black epoxy.

## MINI BETACURVE (MBD)

Thermistor Probe

### FEATURES

- Rapid Time Constant  
(400 milliseconds in liquids).
- Standards supplied with  $\pm 0.2^{\circ}\text{C}$  tolerance  
( $0^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$ ).
- Custom tolerances available on request
- Temperature range  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$

### APPLICATIONS

- Reduced size allows localized  
temperature sensing
- Small Medical probes
- Micro-flow sensing

### PERFORMANCE SPECS

Parameters	Units	Value
Nominal Resistance at $+25^{\circ}\text{C}$	Ohms	10000
Resistance tolerance from $0^{\circ}\text{C}$ to $+70^{\circ}\text{C}$	$^{\circ}\text{C}$	$\pm 0.2$
Alpha Value at $+25^{\circ}\text{C}$	$\%/^{\circ}\text{C}$	4.39
Beta Value 25/85	K	3976
Tolerance on Beta Value 25/85	%	$\pm 0.5$
Time response in Liquids	milliseconds	400
Dissipation Constant in still air	$\text{mW}/^{\circ}\text{C}$	0.5

### MECHANICAL DETAILS

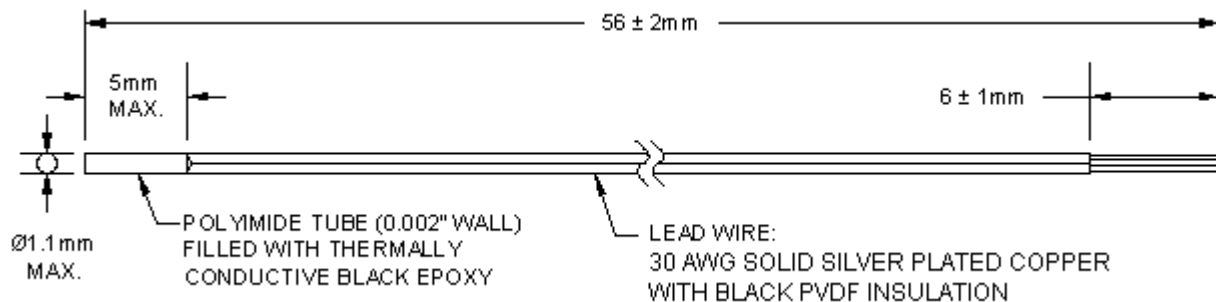


Figure 1: Mini BetaCURVE Thermistor Probe (MBD)

# MINI BETACURVE (MBD)

Thermistor Probe

## RESISTANCE V TEMPERATURE TABLE

Temp. °C	Ohms
----------	------

-40	336103.2
-39	314558.0
-38	294529.1
-37	275900.8
-36	258567.0
-35	242430.2
-34	227400.9
-33	213396.6
-32	200341.4
-31	188165.5
-30	176804.8
-29	166199.8
-28	156296.1
-27	147043.2
-26	138394.7
-25	130307.6
-24	122742.3
-23	115662.2
-22	109033.4
-21	102824.6
-20	97006.9
-19	91553.3
-18	86439.2
-17	81641.4
-16	77138.6
-15	72911.1
-14	68940.4
-13	65209.7
-12	61702.9
-11	58405.5
-10	55303.9
-9	52385.2
-8	49637.8
-7	47050.6
-6	44613.4
-5	42316.7
-4	40151.6
-3	38110.0
-2	36184.0
-1	34366.6
0	32650.9

Temp. °C	Ohms
----------	------

1	31030.8
2	29500.5
3	28054.4
4	26687.5
5	25395.0
6	24172.5
7	23015.9
8	21921.2
9	20884.7
10	19903.2
11	18973.3
12	18092.2
13	17256.9
14	16464.9
15	15713.7
16	15000.9
17	14324.5
18	13682.3
19	13072.6
20	12493.3
21	11943.0
22	11419.9
23	10922.7
24	10449.8
<b>25</b>	<b>10000.0</b>
26	9572.0
27	9164.7
28	8777.0
29	8407.7
30	8056.1
31	7721.0
32	7401.7
33	7097.3
34	6807.1
35	6530.3
36	6266.2
37	6014.3
38	5773.8
39	5544.2
40	5325.0
41	5115.6

Temp. °C	Ohms
----------	------

42	4915.6
43	4724.4
44	4541.7
45	4367.0
46	4200.0
47	4040.2
48	3887.4
49	3741.1
50	3601.1
51	3467.0
52	3338.7
53	3215.8
54	3098.0
55	2985.2
56	2877.0
57	2773.3
58	2673.9
59	2578.6
60	2487.1
61	2399.4
62	2315.2
63	2234.4
64	2156.8
65	2082.3
66	2010.8
67	1942.1
68	1876.0
69	1812.6
70	1751.6
71	1693.0
72	1636.6
73	1582.4
74	1530.2
75	1480.1
76	1431.8
77	1385.3
78	1340.6
79	1297.5
80	1256.1
81	1216.1
82	1177.7

Temp. °C	Ohms
----------	------

83	1140.6
84	1104.9
85	1070.5
86	1037.3
87	1005.3
88	974.4
89	944.7
90	916.0
91	888.3
92	861.5
93	835.8
94	810.9
95	786.8
96	763.6
97	741.2
98	719.6
99	698.6
100	678.4
101	658.9
102	640.0
103	621.8
104	604.2
105	587.1
106	570.6
107	554.6
108	539.2
109	524.3
110	509.8
111	495.9
112	482.3
113	469.2
114	456.5
115	444.2
116	432.3
117	420.8
118	409.7
119	398.8
120	388.4
121	378.2
122	368.3
123	358.8
124	349.5
125	340.6

## MINI BETACURVE (MBD)

Thermistor Probe

### ORDERING INFORMATION

Part Number	Description	$\Omega$ @25°C	MOQ
10K3MBD1	Mini BetaCurve Thermistor Probe (MBD)	10000	1000 *

\* For quantities less than Minimum Order Quantity – contact distribution

#### NORTH AMERICA

Measurement Specialties, Inc.,  
a TE Connectivity Company  
910 Turnpike Road  
Shrewsbury, MA 01545  
Tel: 1-508-842-0516  
Fax: 1-508-842-0342  
Sales: temperature.cs.amer@meas-spec.com

#### EUROPE

Measurement Specialties (Europe), Ltd.,  
a TE Connectivity Company  
Ballybrit Business Park  
Galway Ireland  
Tel: +353-91-753238  
Fax: +353-91-770789  
Sales: temperature.cs.emea@meas-spec.com

#### ASIA

Measurement Specialties (China), Ltd.,  
a TE Connectivity Company  
No. 26 Langshan Road  
Shenzhen High-Tech Park (North)  
Nanshan District, Shenzhen 518057  
China  
Sales: temperature.cs.asia@meas-spec.com

#### [TE.com/sensorsolutions](http://TE.com/sensorsolutions)

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.