

# POWER TRANSFORMER PC MOUNT: WORLD SERIES

### **VPP20-250**

#### Electrical Specifications (@25C)


1. Maximum Power: 5.0VA

2. Input: **Series:** 230VAC, 50/60Hz; **Parallel:** 115VAC, 50/60Hz 3. Output: **Series<sup>1</sup>:** 20.0V CT@ 0.25A; **Parallel<sup>2</sup>:** 10.0V @ 0.5A

4. Voltage Regulation: 25% TYP @ full load to no load

5. Temperature Rise: 30C TYP (45C MAX allowed) 6. Insulation Resistance:  $100M\Omega$ 

7. Hipot: 4000VAC between primary to secondary and windings to core.



#### Construction:

Dual bobbin construction with an insulated shroud, both made of a high temperature material that exceeds UL flammability requirements.

#### Safety:

Since the dual bobbin construction effectively reduces capacitance, electrostatic shielding is not required. World Series Transformers are designed and manufactured to meet the following agency approvals:







#### **Agency File:**

UL: File E53148, UL 5085-1 and 3 (formerly UL 506), General Purpose. UL: File E65390, UL 5085-1 and 3 (formerly UL1585), Class 2/3.

CSA: File LR 221330. C22.2 NO. 66, General Purpose.

TUV: File R72103639, EN 60950, (IEC950) information Technology Equipment.

A. Dimensions:						Units: In inches	
Α	В	С	D	Е	F	G	Н
1.062	1.375	0.187	0.200	0.400	1.312	1.625	1.000

B. PIN DIM. : 0.025 SQ C. WT Lbs. : 0.37

D. Mounting Holes: 0.112 dia. x 2.0

#### Connections<sup>3</sup>:

**Input:** Series – Pin 1 to Pin 6, Jumper Pin 4 to Pin 3


Parallel - Pin 1 to Pin 6, Jumper Pin 1 to Pin 4 and Pin 3 to Pin 6

Output: Series – Pin 7 to Pin 12, Jumper Pin 9 to Pin 10

Parallel – Pin 7 to Pin 12, Jumper Pin 7 to Pin 10 and Pin 9 to Pin 12

RoHS Compliance: Meets the requirements of 2002/95/EC, known as the RoHS initiative.


\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.




<sup>&</sup>lt;sup>2</sup> Inherently limited. No fusing required. Class 2.

<sup>&</sup>lt;sup>3</sup> Primary and secondary windings are designed to be connected in series or parallel. Winding are not intended to be used independently.



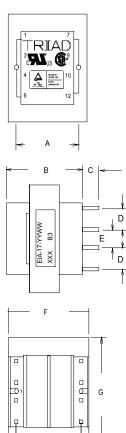



**SCHEMATIC** 

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Triad Magnetics: VPP20-250