


Data sheet

Commercial Art.No.: 25.350.3216.0

PCB pin header 8213 S / 2 G OB THR

PCB pin header, connection method depends on used socket part , 2 poles, with solder pin (2.6mm, tin plated), pitch: 5.08 mm, type of packing: Tape on reel, color: black, This product can be soldered by reflow and wave soldering,

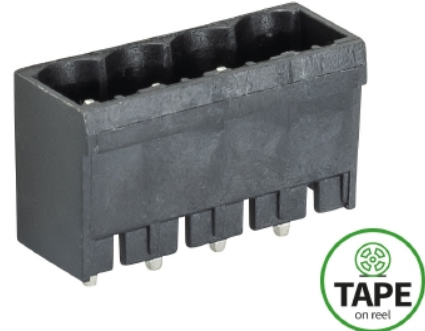

Commercial Art.No.	25.350.3216.0
EAN	4015573868816
Order Unit	170

Certificates / Approvals



Technical data

General

Modular spacing	5.08 mm
Soldering process	THR
Packaging	Tape on Reel
Number of poles	2
Number of levels	1
Marking	No
Fastening	None
Mating direction towards (circuit) board	90°

Technical data

Rated current	12 A
Overvoltage Category I	1000 V
Overvoltage Category II	400 V
Overvoltage Category III	250 V
Rated impulse voltage	4 kV

Technical Data UL/CSA

Voltage UL	300 V
Current field wiring	15 A
Current factory wiring	15 A
Voltage CSA	300 V
Current CSA	15 A

Other



Type of insulation material	Thermoplastic
-----------------------------	---------------

Color	black
Height	12 mm
Length	12.16 mm
Depth	8.4 mm
Material contact base	CuZn
Material contact surface	Sn



Classification

ECLASS 8.1	27440402
ETIM 7.0	EC002637
ETIM 6.0	EC002637
ETIM 5.0	EC002637
ETIM 4.0	EC002637



LP-Stiftleiste
8213 S / 2 THR
25.350.3296.0

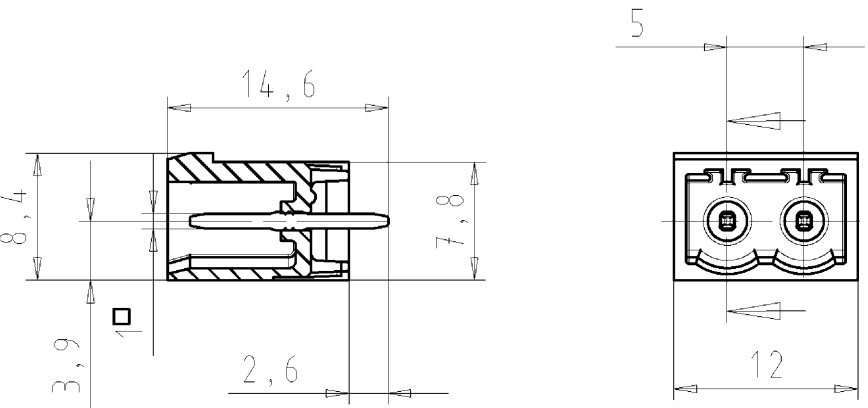


LP-Stiftleiste
8213 S / 3 THR
25.350.3396.0




LP-Stiftleiste
8213 S / 4 THR
25.350.3496.0

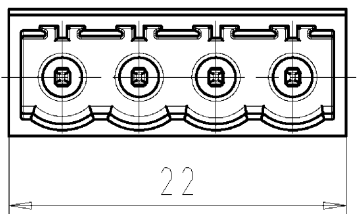

gezeichnete Ausführung 2-polig
drawn version 2-poles

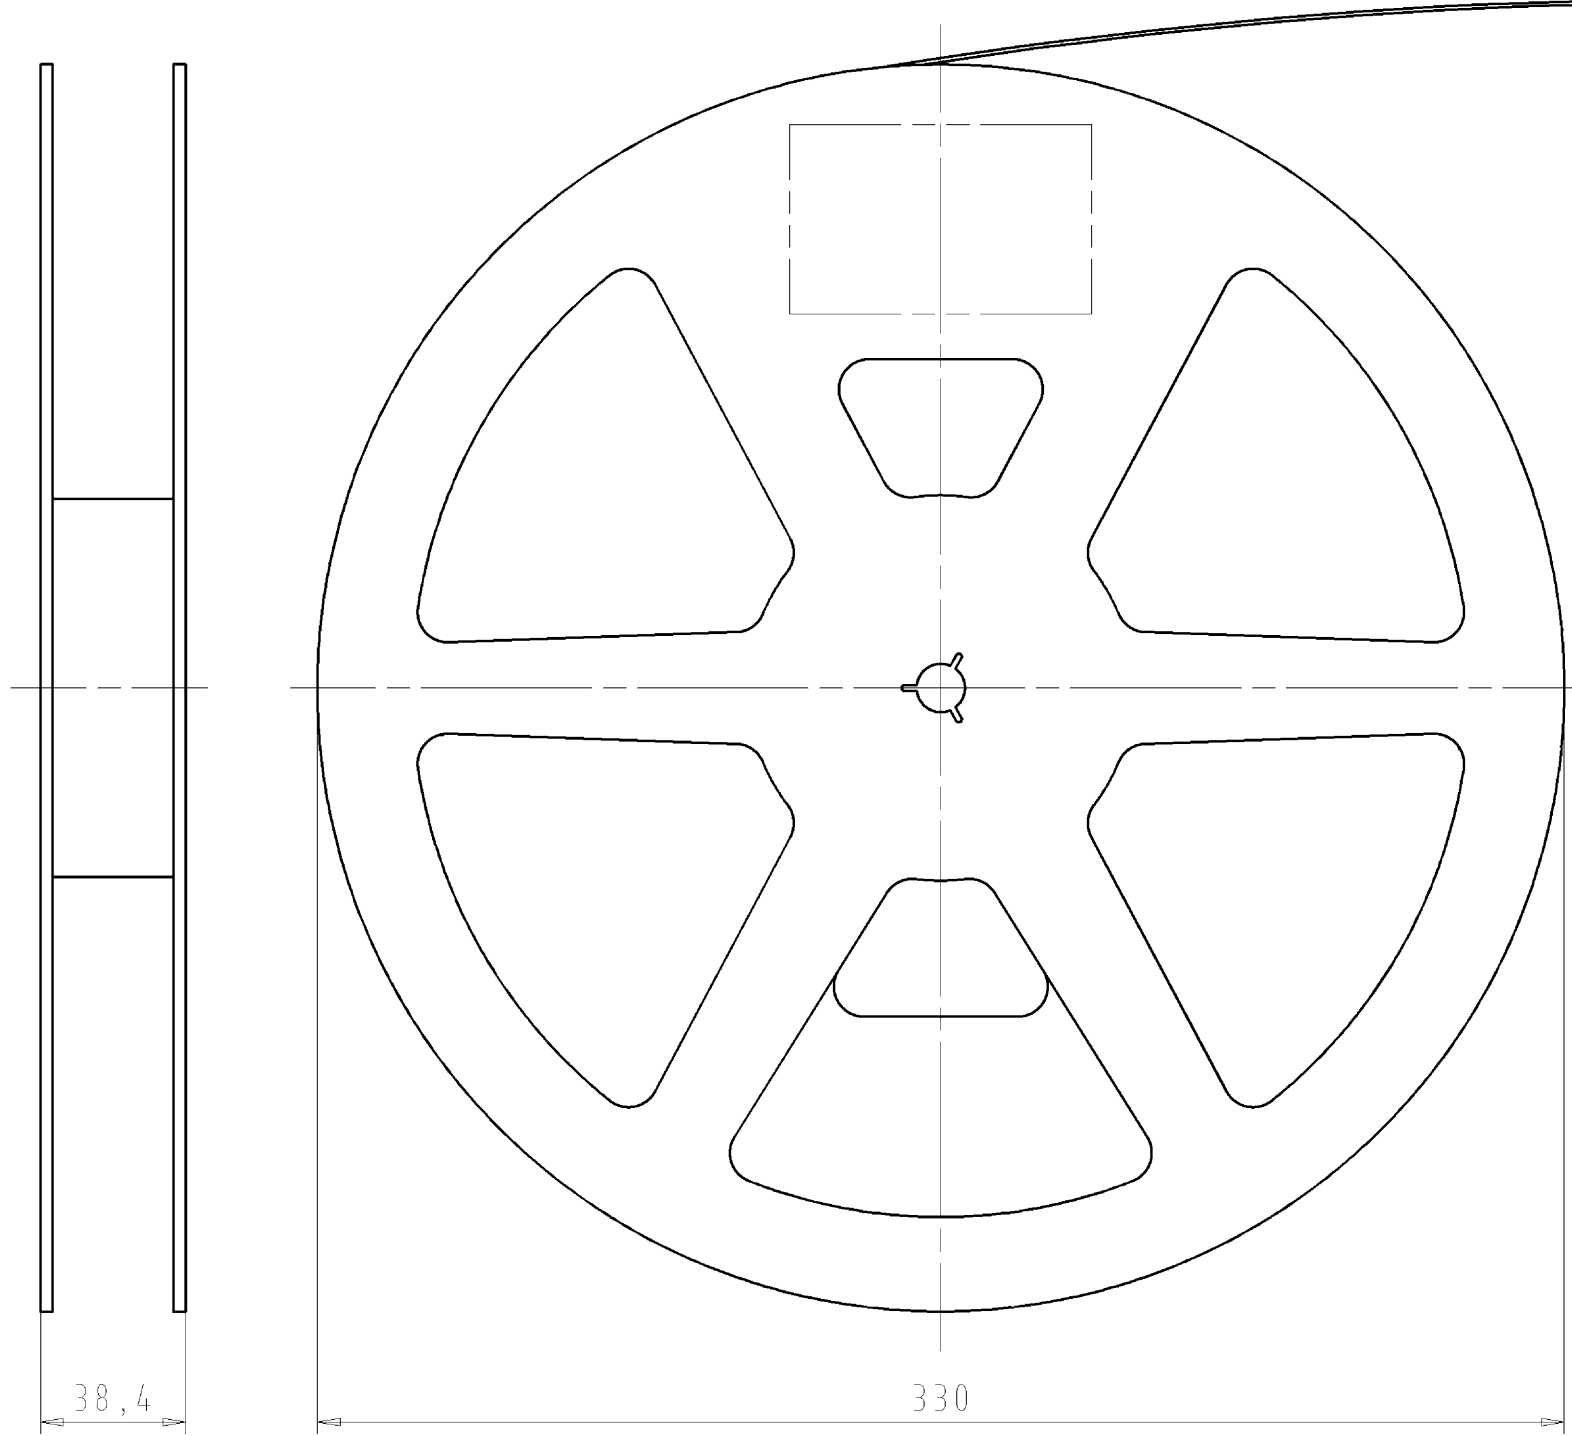


Lage der Teile im Gurt

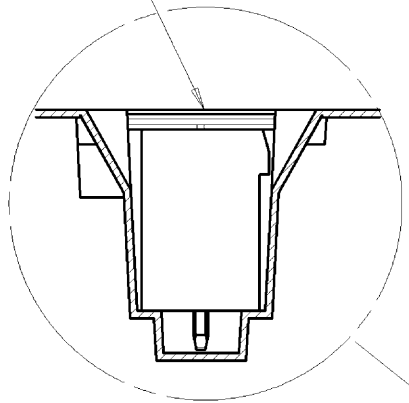


Zuführrichtung
direction of feed

Gurt im Schnitt dargestellt
tape drawn in section

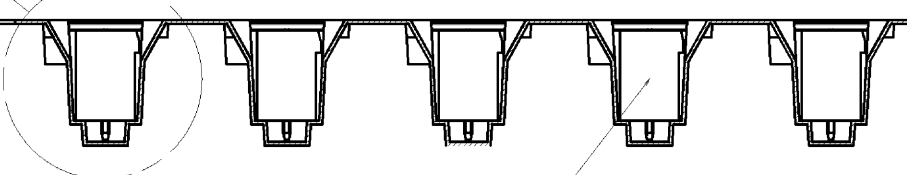

170 x Pos.1

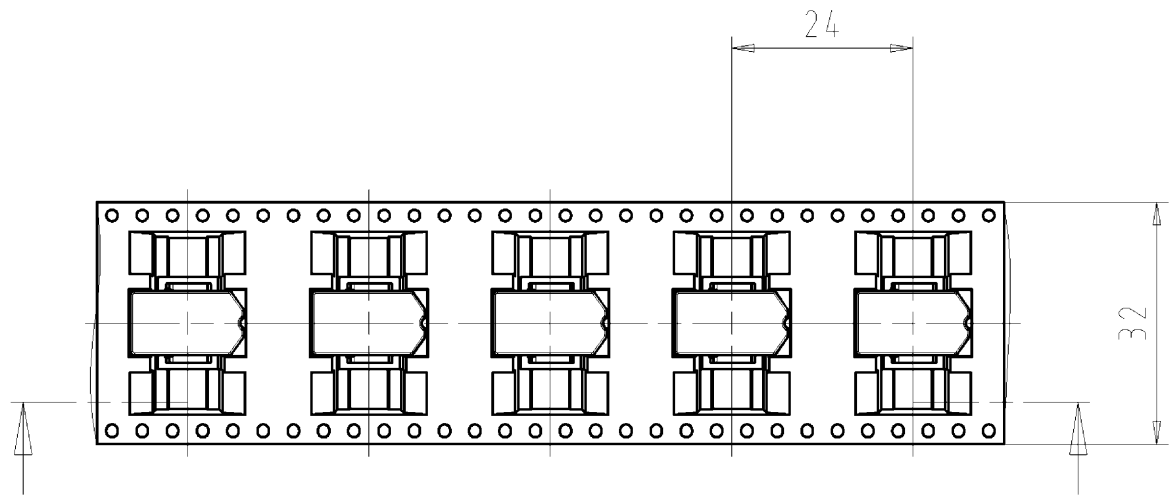

170 Teile pro Tape on Reel
Gurtung und Spule nach DIN IEC 60286-3
Gurtvorlauf nach DIN IEC 60286-3
Gurtnachlauf nach DIN IEC 60286-3
Spule und Gurt sind antistatisch.
170 parts per tape on reel
tape on reel according to DIN IEC 60286-3
tape feed according to DIN IEC 60286-3
tape supply according to DIN IEC 60286-3
reel and tape are antistatic

Zulässige Abweichungen nach DIN 7167/Permissible deviations acc. to DIN 7167. [This DIN-standard describes the envelope principle. According to the envelope principle the deviations of form and parallelism are limited by the size tolerances].				ja/yes ☒ Stoffverbots- und Deklarationsliste nach UU-TQM-05/03 ist einzuhalten. List of banned and declarable substances according to Wieland document e-UU-TQM-05/03 is to obey.						
Freitoleranz nach - General tolerance			CAD - Zeichnung, keine manuellen Änderungen CAD - drawing, no manual modifications allowed			1.Verwendung: - First Use:		Blatt: 1 von 1 Sheet: of 1		
	/		Werkstoff/Material	2013	Tag/Date	Name	T	Zeichnung Nr./Drawing No.		Index
	/			gezeichnet drawn	26.02.	Eller		25.350.3216.0 01K		
	/			geprüft checked	-	-				
	/			Normspr. Stand. check	-	-				
				Maße in mm/Dimensions are in mm						
	/	Vol.	mm	ØH./Surf.		mm	Ersatz für/Replacement for: -			
	/		wieland		Type		Benennung/Title TAPE_ON_REEL LP-Stiftleiste 8213 S/.. THR gerade			
	/									
	/									
Index	Datum / Sheet Date / Blatt									
Änderung/Revision			Elektrische Verbindungen							