


# 6Amps

## ATH06

Total Power: 33W  
 Input Voltages: 3.3V, 5V, 12V  
 No. of Outputs: Single

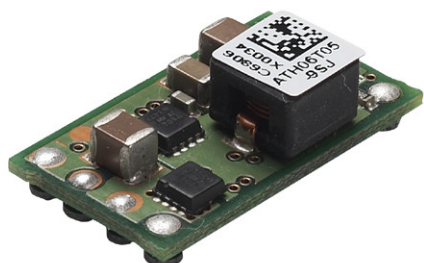

### Special Features

- Point-of-Load Alliance product
- Open frame TH or SMT termination
- Auto-Track™ Sequencing
- Output Voltage Adjust (Resistor Programming)
- Under Voltage Lockout
- Pre-Biased start-up<sup>2</sup>
- Output On/Off Inhibit
- -40°C to +85°C Ambient Air Operation
- Non Isolated module

### Environmental

Ambient air operating temperature range:  
 -40°C to +85°C

Storage temperature: -40°C to +125°C

Demonstrated MTBF: 3.7M Hrs

### Safety

UL, cUL 60950 Recognition

EN 60950 through TUV or VDE (Pending)

### Electrical Specs

#### Input

Input Range 3.0 - 3.6V  
 4.5 - 5.5V  
 10.8 - 13.2V

Under Voltage Lockout with hysteresis

Efficiency up to 95%

#### Output

Overall Regulation 1% of Vo Typ

Noise/Ripple 30mV Typ (2.5Vo and below)

1% Vo Typ (Vo > 2.5V)

Remote sense Up to 300mV max

Transient Response 100mV typical for 3.3Vo  
 for 50% to 100% I<sub>O,MAX</sub> step change  
 70us recovery time (Co = 330uF)

Over Current Protection 160% I<sub>O,MAX</sub> typical (autorecovery)

#### Control

Inhibit On/Off Negative Logic  
 (OPEN = Normal Operation)  
 (GROUND = Function Active)

Output Voltage Adjust See output range on page 2

Output Margin ±5% V<sub>O,NOM</sub>

Output Auto-Track™ (See Note 5)

Specifications subject to change without notice

## AMERICAS

5810 Van Allen Way  
Carlsbad, CA 92008  
Telephone: 760-930-4600  
Facsimile: 760-930-0698

## EUROPE

Astec House, Waterfront Business Park  
Merry Hill, Dudley  
West Midlands, DY5 1LX, UK  
Telephone: 44 (1384) 842-211  
Facsimile: 44 (1384) 843-355

## ASIA

Units 2111-2116, Level 21  
Tower1, Metroplaza  
223, Hing Fong Road  
Fwai Fong, New Territories  
Hong Kong  
Telephone: 852-2437-9662  
Facsimile: 852-2402-4426



## Ordering Information

| Input Voltage  | Output Voltage | Output <sup>3</sup> Current | Efficiency <sup>4</sup> | Model Number       |
|----------------|----------------|-----------------------------|-------------------------|--------------------|
| 3.0V to 3.6V   | 0.8V to 2.5V   | 6A                          | 94%                     | ATH06T033- 9(S)(J) |
| 4.5V to 5.5V   | 0.8V to 3.6V   | 6A                          | 95%                     | ATH06T05 - 9(S)(J) |
| 10.8V to 13.2V | 1.2V to 5.5V   | 6A                          | 93%                     | ATH06K12 - 9(S)(J) |

## OPTIONS:

- "-9J" - Output Trim, TH termination, Tray Packaging
- "-9SJ" - Output Trim, SMT termination, Tray Packaging
- "-9S" - Output Trim, SMT Termination, T&R packaging



## Pin Assignments

## Single Output

|           | PINS |
|-----------|------|
| GND       | : 1  |
| Track     | : 2  |
| Vin       | : 3  |
| Inhibit   | : 4  |
| Vo Adjust | : 5  |
| Vout      | : 6  |

## Notes:

- Nominal values apply with sense pins connected to +Vout and Ground Return with other control pins unconnected.
- Pre-Bias startup capability exists for 3.3Vin and 5Vin devices.
- Output derating applies at elevated ambient temperature.
- Typical efficiency taken at 4A load, 2.5V output (3.3Vin device); 4A load, 3.3V output (5Vin device); 5A load, 5V output (12Vin device).
- Consult the technical reference notes when available.
- Mechanical Dimensions are nominal values.
- Auto-Track™ is a trademark of Texas Instruments.
- Specification subject to change without notice.

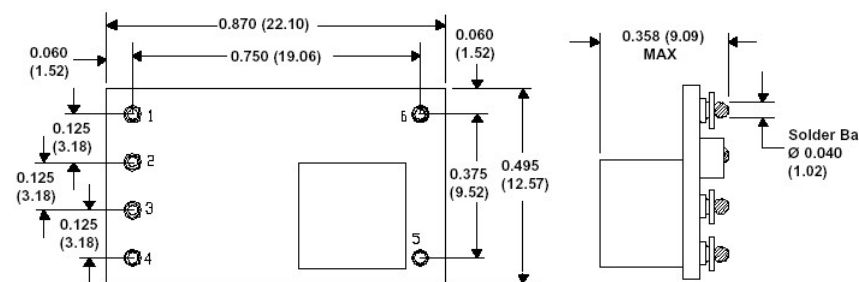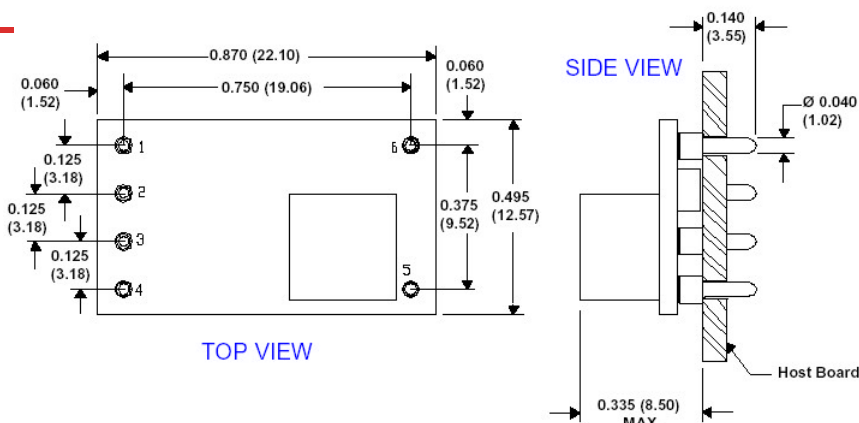

Through-hole and SMT Outline [in (mm)]

Astec reserves the right to make changes to the information contained herein without notice and assumes no liability as a result of its use or application. (REV02: OCTOBER 21, 2004)