


# C&K 8060 Series

## Alternate Action and Momentary Pushbutton Switches



A

Pushbutton

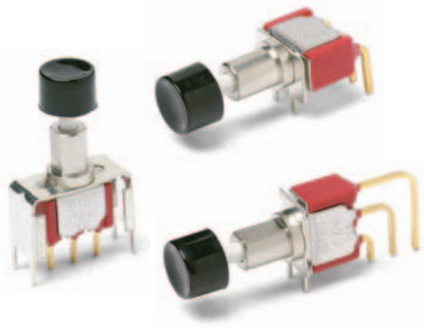

### Features/Benefits

- Long travel
- Available with LED
- Long life contact design

### Typical Applications

- Instrumentation
- Computers and peripherals
- Telecommunications and networking equipment



Models Available

### Specifications

CONTACT RATING: Q contact material: 6AMPS @ 120V AC or 28V DC; 3AMPS @ 250V AC. See page A-53 for additional ratings.  
 ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.  
 CONTACT RESISTANCE: Below 20mΩ typ. initial @ 2-4V DC, 100mA, for both silver and gold plated contacts.  
 INSULATION RESISTANCE: 10<sup>9</sup>Ω min.  
 DIELECTRIC STRENGTH: 1,000Vrms min. @ sea level.  
 OPERATING TEMPERATURE: -30°C to 65°C  
 SOLDERABILITY: Per MIL-STD-202F method 208D, or EIA RS-186E method 9 (1 hour steam aging).  
 CAP INSTALLATION FORCE: 10lbs. maximum permissible.

**NOTE:** Specifications and materials listed above are for switches with standard options. For information on specific and custom switches, consult Customer Service Center.

### Materials

CASE: Glass filled nylon 6/6 or diallyl phthalate (DAP) flame retardant (UL 94V-0).  
 PLUNGER: S, S1, S2 Options: Glass filled nylon or glass filled polyester (PBT) (UL 94V-0). L, L1 Options: Brass, nickel plated.  
 CAP & FRAME: Nylon, black standard.  
 BUSHING: Brass or zinc, nickel plated.  
 HOUSING: Stainless steel.  
 SWITCH SUPPORT: Brass or steel, tin plated.  
 END CONTACTS: Q contact material: Coin silver, silver plated. See page A-53 for additional contact materials.  
 CENTER CONTACT & ALL TERMINALS: Q contact material: Copper alloy, silver plated. See page A-53 for additional contact materials.  
 TERMINAL SEAL: Epoxy  
 HARDWARE: Nut & Locking Ring: Brass, nickel plated; Lockwasher: Steel, nickel plated.


### Build-A-Switch

To order, simply select desired option from each category and place in the appropriate box. Available options are shown and described on pages A-47 thru A-54. For additional options not shown in catalog, consult Customer Service Center. All models have epoxy terminal seal and are compatible with all "bottom-wash" PCB cleaning methods.

<p><b>Switch Function</b></p> <p><b>8161</b> (STD.) SPDT 0n-0n  <b>8168</b> (STD.) SPDT 0n-Mom.  <b>8261</b> (STD.) DPDT 0n-0n</p>	<p><b>Actuator or Plunger</b></p> <p><b>S</b> (STD.) .710" high plunger with .375" dia. cap  <b>J80</b> Snap-in  <b>J81</b> Snap-in with frame  <b>J82</b> Snap-in with frame for LED  <b>J86</b> Snap-in with frame &amp; LED  <b>L</b> .740" high plunger with .395" dia. cap  <b>L1</b> .740" high plunger with .590" dia. cap  <b>S1</b> .615" high plunger with .200" dia. cap  <b>S2</b> .710" high plunger with .310" dia. cap</p>	<p><b>Bushing</b></p> <p><b>H</b> (STD.) .300" high, flat, hi torque  <b>H9</b> (STD.) .300" high, flat, hi torque  <b>NONE</b> No bushing choice required  <b>Y3</b> 7.6mm, keyway</p> <p><b>Terminations</b></p> <p><b>A</b> (STD.) Right angle, PC thru-hole  <b>AV2</b> (STD.) Vertical right angle, PC thru-hole  <b>C</b> (STD.) PC Thru-hole  <b>Z</b> (STD.) Solder lug  <b>A3</b> Right angle, snap-in, PC thru-hole  <b>AV3</b> Vertical right angle, snap-in, PC thru-hole  <b>V3</b> .460" high, V-bracket  <b>V4</b> .630" high, V-bracket  <b>V6</b> .460" high, V-bracket  <b>V21</b> .555" high, snap-in V-bracket  <b>V31</b> .460" high, snap-in V-bracket  <b>W</b> .750" long, wire wrap  <b>Z3</b> Quick connect</p>	<p><b>Contact Material</b></p> <p><b>B</b> (STD.) Gold  <b>Q</b> (STD.) Silver  <b>G</b> Gold over silver  <b>K</b> Gold, tin-lead  <b>L</b> Gold over silver, tin-lead  <b>M</b> Silver, tin-lead</p> <p><b>Seal</b></p> <p><b>E</b> (STD.) Epoxy  <b>I</b> Epoxy potted base</p> <p><b>Cap Color</b></p> <p><b>2</b> (STD.) Black  <b>1</b> White  <b>3</b> Red  <b>4</b> Orange  <b>5</b> Yellow  <b>9</b> Gray</p> <p><b>Frame Color</b></p> <p><b>2</b> (STD.) Black</p> <p><b>LED Color</b></p> <p><b>3</b> (STD.) Red  <b>NONE</b> Models without LED</p>
--	---	---	--

# C&K 8060 Series Alternate Action and Momentary Pushbutton Switches

## SWITCH FUNCTION




NO. POLES	MODEL NO.	SWITCH FUNCTION		CONNECTED TERMINALS		SCHEMATIC
		POS. 1	POS. 2	POS. 1	POS. 2	
SP	<b>8161 (STD.)</b> <b>8168</b>	ON ON	ON MOM	2-3 2-3	2-1 2-1	SPDT 
<b>SPDT</b> <p>Part number shown: 8161SHZQE</p>						
DP	<b>8261 (STD.)</b>	ON ON	ON ON	2-3-5-6 2-1-5-4	2-1-5-4	DPDT 
<b>DPDT</b> <p>Part number shown: 8261SHZQE</p>						

MOM = Momentary

All models with all options when ordered with G, L, Mor Q contact material.

## ACTUATOR—SNAP-IN FRONT MOUNT




OPTION CODE	CAP COLOR
<b>2</b>	(STD.) BLACK
<b>1</b>	WHITE
<b>3</b>	RED
<b>4</b>	ORANGE
<b>5</b>	YELLOW
<b>9</b>	GRAY

Cap Finish: matte.  
Other colors available, consult Customer Service Center.

Available with C, W, Z or Z3 terminations.


**NOTE:** Caps & frames available separately, see pages A-54 and A-55.

### J80 SNAP-IN

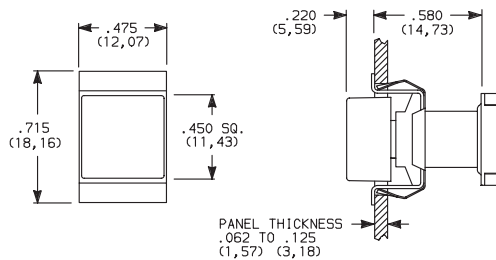

### PANEL MOUNTING


.005 R. MAX. (0,13) TYP.



\*Increase this dimension to .620/.625 (15,75/15,88) for .091/.125 (2,41/2,18) thick panels.




### J81 SNAP-IN WITH BLACK FRAME

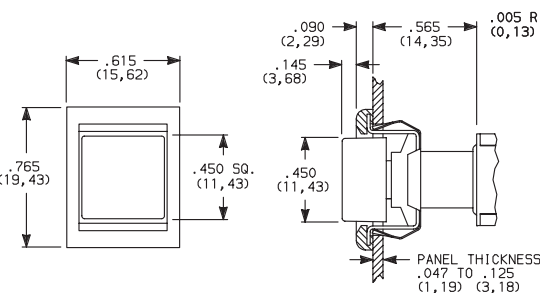

### PANEL MOUNTING

.005 R. MAX. (0,13) TYP.



\*Increase this dimension to .620/.625 (15,75/15,88) for .091/.125 (2,41/2,18) thick panels.



Third Angle Projection  
Dimensions are shown: IN (mm)  
Dimensions subject to change




A

Pushbutton


# C&K 8060 Series Alternate Action and Momentary Pushbutton Switches

## ACTUATOR—SNAP-IN FRONT MOUNT



**J82** SNAP-IN WITH BLACK FRAME FOR LED

Pushbutton  
A

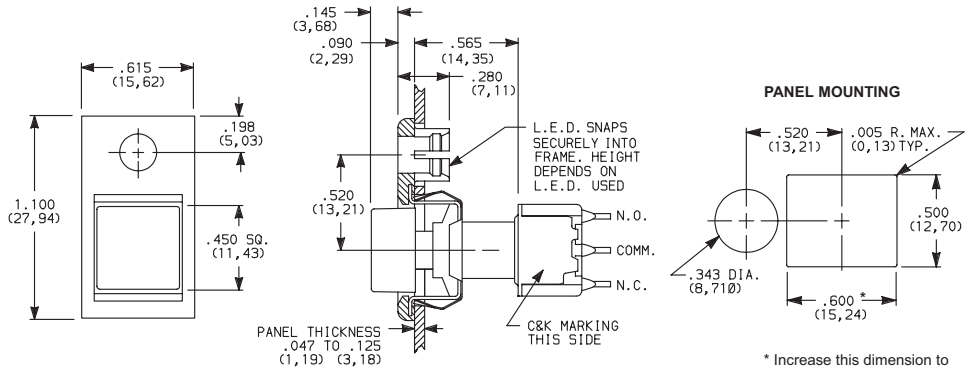

\* Increase this dimension to .620/.625 (15,75/15,88) for .091/.125 (2,31/3,18) thick panels.

Available with C, W, Z or Z3 terminations.


**LED not included.**  
For LED information, see page A-55

**NOTE:** Caps & frames available separately, see pages A-54 and A-55


Other colors available, consult Customer Service Center.

OPTION CODE	CAP COLOR
<b>2</b>	(STD.) BLACK
<b>1</b>	WHITE
<b>3</b>	RED
<b>4</b>	ORANGE
<b>5</b>	YELLOW
<b>9</b>	GRAY


## ACTUATOR—SNAP-IN FRONT MOUNT



**J86** SNAP-IN WITH BLACK FRAME AND LED



8161J86ZQE 223  
SPDT

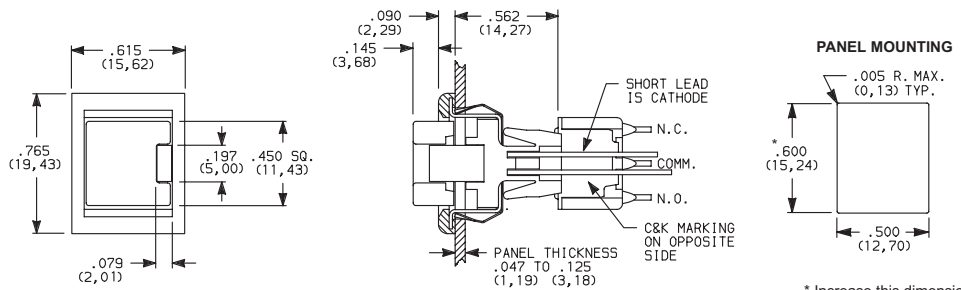

\* Increase this dimension to .620/.625 (15,75/15,88) for .091/.125 (2,31/3,18) thick panels.

Available with C, W, Z or Z3 terminations and SPDT models only.

**NOTE:** Caps & frames available separately, see pages A-54 and A-55

Other colors available, consult Customer Service Center.

OPTION CODE	CAP COLOR
<b>2</b>	(STD.) BLACK
<b>1</b>	WHITE
<b>3</b>	RED
<b>4</b>	ORANGE
<b>5</b>	YELLOW
<b>9</b>	GRAY

OPTION CODE	LED COLOR
<b>3</b>	(STD.) RED

For LED information, see page A-55




Dimensions are shown: IN (mm)  
Dimensions subject to change


# C&K 8060 Series Alternate Action and Momentary Pushbutton Switches

## PLUNGER


**S** (STD.) PLUNGER WITH CAP P/N 7527




**S1** PLUNGER WITH CAP P/N 7089



**S2** PLUNGER WITH CAP P/N 8018




**S, S1, S2 plunger dimensions.**




Plunger material: Glass filled nylon or glass filled polyester (UL 94V-0).


**L** PLUNGER WITH CAP P/N 8941



**L1** PLUNGER WITH CAP P/N 8940



**L, L1 plunger dimensions.**



Plunger Material: Brass, chrome plated.

OPTION CODE	CAP COLOR
<b>2</b>	(STD.) BLACK
<b>1</b>	WHITE
<b>3</b>	RED
<b>4</b>	ORANGE
<b>5</b>	YELLOW
<b>9</b>	GRAY


Cap Finish: gloss. Cap supplied not installed. Other colors available, consult Customer Service Center.

**NOTE:** When selecting plunger and cap option, bushing selection must also be made, see below.

## BUSHING

**H** (STD.) .300" HIGH THREADED, FLAT

**H9** (STD.) .300" HIGH UNTHREADED, FLAT




H bushing standard with C, W, Z or Z3 terminations.  
H9 bushing standard with A, A3, AV2, AV3, AW or V3-V31 terminations.

Withstands 12 in./lbs. of torque with no distortion.

**NONE** NO BUSHING CHOICE REQUIRED (JXX ACTUATORS)



**Y3** 7.6mm THREADED, KEYWAY

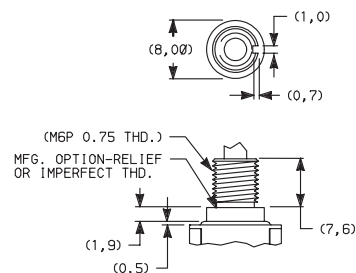


Withstands 12 in./lbs. of torque with no distortion.

**NOTE:** When selecting bushing option, plunger selection must also be made, see above. No bushing option choice required when any JXX actuator option is selected.

### PANEL MOUNTING

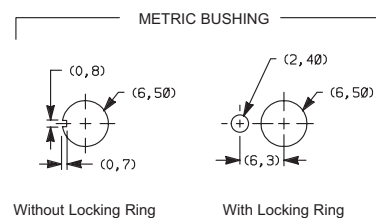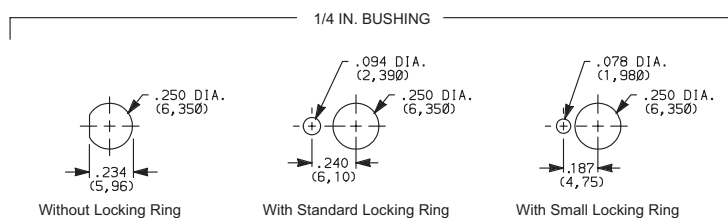

**NOTE:** Two mounting nuts, locking ring and lockwasher supplied standard with threaded bushings. Optional mounting nut and locking ring styles and finishes available, see section N.



Third Angle Projection  
Dimensions are shown: IN (mm)  
Dimensions subject to change



A

Pushbutton

# C&K 8060 Series Alternate Action and Momentary Pushbutton Switches




Pushbutton

A


## TERMINATIONS



### C (STD.) PC THRU-HOLE

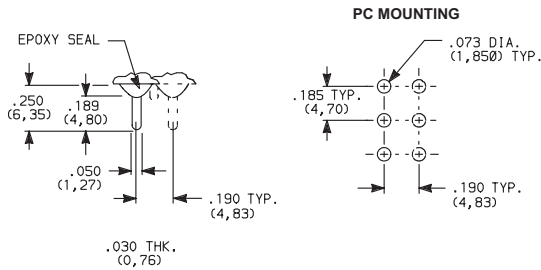

### Z (STD.) SOLDER LUG




### SPDT and DPDT


### SPDT and DPDT

Not available with K, L or M contact material.

### Z3 QUICK CONNECT



### W WIRE WRAP



### SPDT and DPDT




Not available with K, L or M contact material.  
Mating quick connector available; order part number 53010000Q page A-55

### SPDT and DPDT



### A RIGHT ANGLE, PC THRU-HOLE




8161SH9ABE2  
SPDT

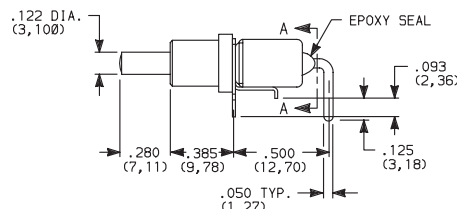

### A3 RIGHT ANGLE, SNAP-IN, PC THRU-HOLE



### PC MOUNTING



NOTE: PC pattern must clear switch support leg.

Not available with I seal.  
Terminal bend radii and lead-in manufacturing option.



Third Angle  
Projection  
Dimensions are shown: IN (mm)  
Dimensions subject to change

# C&K 8060 Series Alternate Action and Momentary Pushbutton Switches


## TERMINATIONS



A



Pushbutton

### A RIGHT ANGLE, PC THRU-HOLE

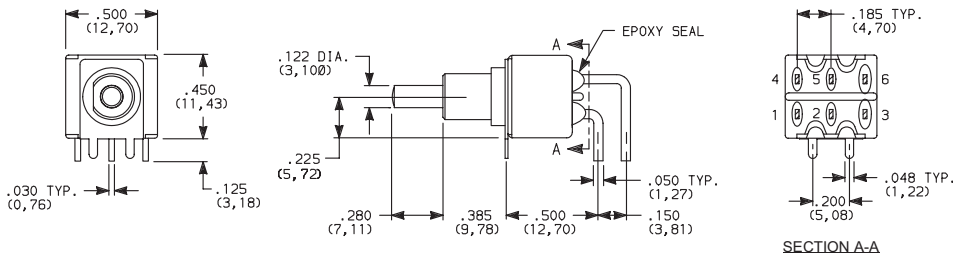



8261SH9ABE2  
DPDT

### A3 RIGHT ANGLE, SNAP-IN, PC THRU-HOLE

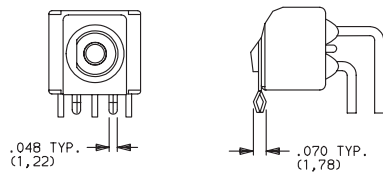



Not available with I seal.  
Terminal bend radii and lead-in manufacturing option.

### AV2 (STD.) VERTICAL RIGHT ANGLE, PC THRU-HOLE, .150" PITCH

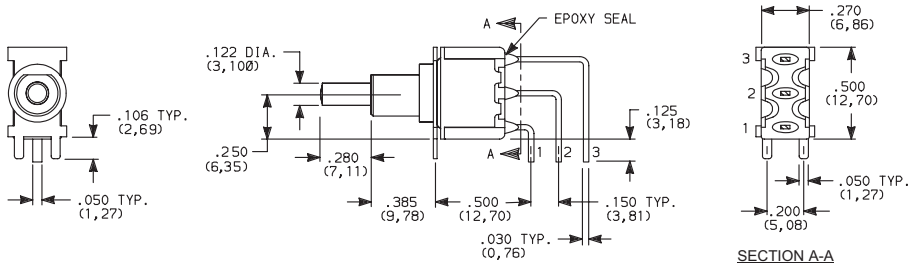


8161SH9AV2BE2  
SPDT

### AV3 VERTICAL RIGHT ANGLE, SNAP-IN, PC THRU-HOLE, .150" PITCH

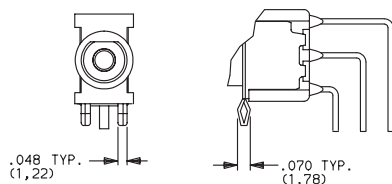

Not available with I seal.  
Terminal bend radii and lead-in manufacturing option.





# C&K 8060 Series

## Alternate Action and Momentary Pushbutton Switches



### TERMINATIONS



**AV2** (STD.) VERTICAL RIGHT ANGLE, PC THRU-HOLE, .150" PITCH

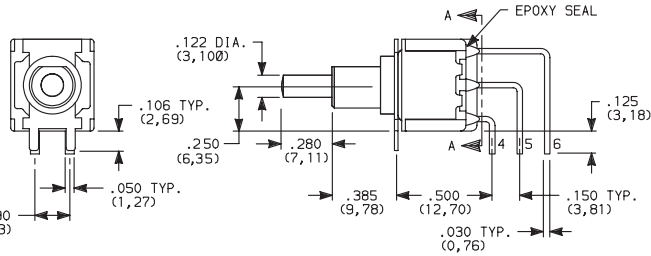




**AV3** VERTICAL RIGHT ANGLE, SNAP-IN, PC THRU-HOLE, .150" PITCH

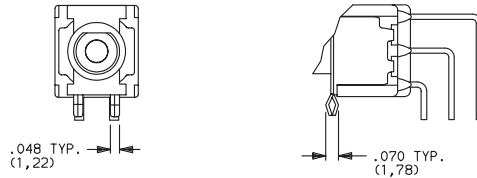

Not available with I seal.  
Terminal bend radii and lead-in manufacturing option.

**V6** VERTICAL MOUNT, V-BRACKET

**V21** VERTICAL MOUNT, V-BRACKET, SNAP-IN

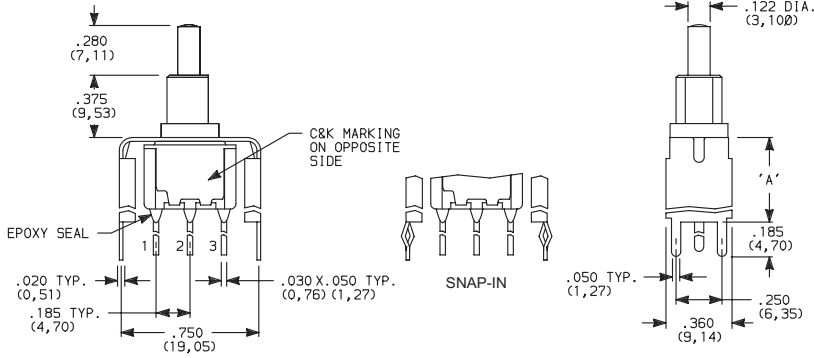



OPTION CODE	DIM 'A'
V21	.555 (14,10)
V6	.460 (11,68)

Not available with I seal.

**V6** VERTICAL MOUNT, V-BRACKET

**V21** VERTICAL MOUNT, V-BRACKET, SNAP-IN

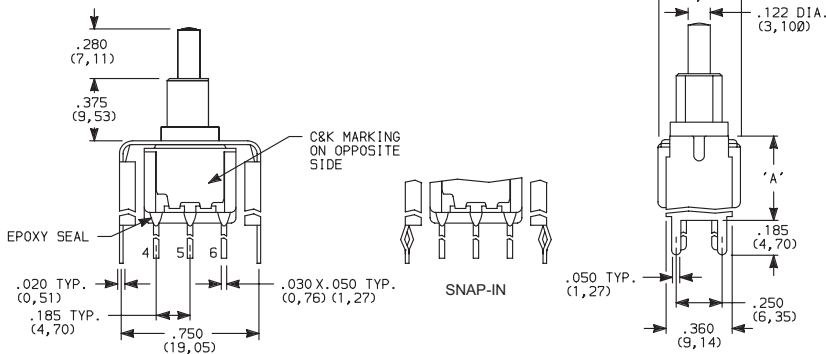

OPTION CODE	DIM 'A'
V21	.555 (14,10)
V6	.460 (11,68)

Not available with I seal.






Dimensions are shown: IN (mm)  
Dimensions subject to change

# C&K 8060 Series Alternate Action and Momentary Pushbutton Switches

## TERMINATIONS

**V3, V4** VERTICAL MOUNT, V-BRACKET

**V31** VERTICAL MOUNT, V-BRACKET, SNAP-IN

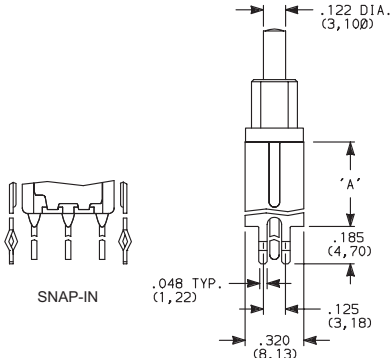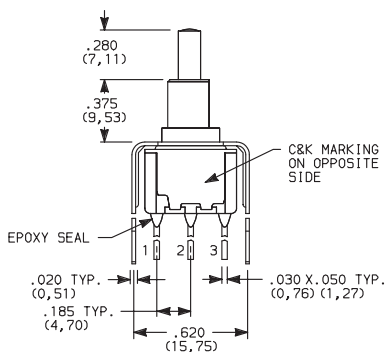




**8161SH9\_BE2  
SPDT**

OPTION CODE	DIM 'A'
<b>V3, V31</b>	.460 (11,68)
<b>V4</b>	.630 (16,00)

Not available with I seal.

**V3, V4** VERTICAL MOUNT, V-BRACKET

**V31** VERTICAL MOUNT, V-BRACKET, SNAP-IN

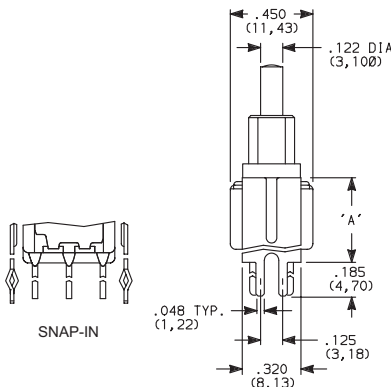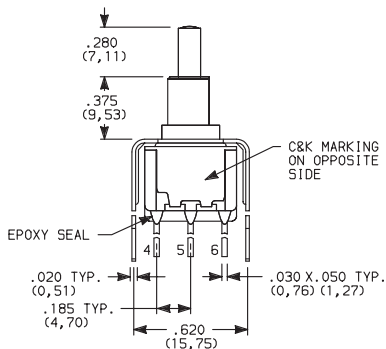

**8261SH9\_BE2  
DPDT**

OPTION CODE	DIM 'A'
<b>V3, V31</b>	.460 (11,68)
<b>V4</b>	.630 (16,00)

Not available with I seal.

## CONTACT MATERIAL

OPTION CODE	CONTACT MATERIAL	TERMINAL PLATING	RATINGS	
<b>B (STD.)</b>	GOLD <sup>1</sup>	GOLD <sup>1</sup>	LOW LEVEL/DRY CIRCUIT	Q 4 VA MAX. @ 20V AC OR DC MAX.
<b>K</b>		TIN-LEAD <sup>6</sup>		
<b>Q (STD.)</b>	SILVER <sup>4,5</sup>	SILVER <sup>5</sup>	POWER	6 AMPS @ 120V AC OR 28V DC; 3 AMPS @ 250V AC.
<b>M</b>		TIN-LEAD <sup>6</sup>		
<b>G</b>	GOLD OVER SILVER <sup>2,3</sup>	GOLD <sup>3</sup>	LOW LEVEL/DRY CIRCUIT OR POWER	Q 4 VA MAX @ 20V AC OR DC MAX. OR 6 AMPS @ 120V AC OR 28V DC; 3 AMPS @ 250V AC.
<b>L</b>		TIN-LEAD <sup>6</sup>		

CONTACT MATERIAL APPLICATION RECOMMENDATIONS—SEE SECTION N.

<sup>1</sup> CONTACTS & TERMINALS: Copper alloy, with gold plate over nickel plate.

<sup>2</sup> END CONTACTS: Coin silver, with gold plate over nickel plate.

<sup>3</sup> CENTER CONTACTS & ALL TERMINALS: Copper alloy, with gold plate over nickel plate.

<sup>4</sup> END CONTACTS: Coin silver, silver plated.

<sup>5</sup> CENTER CONTACT & ALL TERMINALS: Copper alloy, silver plated.

<sup>6</sup> TERMINALS: Copper alloy, with tin-lead alloy over nickel plate.

All models with all options when ordered with G, L, M or Q contact material.

B contact material standard with all terminations except C, Z & Z3

Q contact material standard with C, Z & Z3 terminations.

K, L & M contact materials not available with Z & Z3 terminations.



Third Angle  
Projection

Dimensions are shown: IN (mm)  
Dimensions subject to change



A

Pushbutton



# C&K 8060 Series Alternate Action and Momentary Pushbutton Switches





A

Pushbutton

## SEAL

**E** (STD.) EPOXY SEAL

**I** EPOXY POTTED BASE

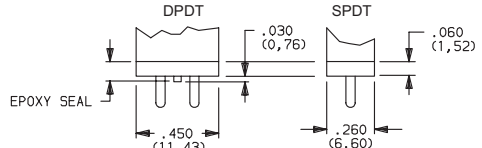


LENGTH IS SAME AS SWITCH BODY

**NOTE:** Available with C, W, Z, Z3 terminations only.

## AVAILABLE HARDWARE

Cap




**PART NO.**

- 708901000 WHITE
- 708902000 BLACK
- 708903000 RED
- 708904000 ORANGE
- 708905000 YELLOW
- 708909000 GRAY

Material: Nylon  
Finish: Gloss

Cap

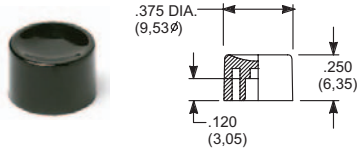


**PART NO.**

- 752701000 WHITE
- 752702000 BLACK
- 752703000 RED
- 752704000 ORANGE
- 752705000 YELLOW
- 752709000 GRAY

Material: Nylon  
Finish: Gloss

Cap

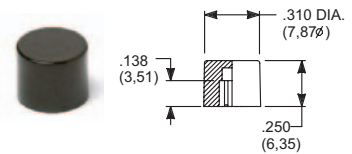


**PART NO.**

- 801801000 WHITE
- 801802000 BLACK
- 801803000 RED
- 801804000 ORANGE
- 801805000 YELLOW
- 801809000 GRAY

Material: Nylon  
Finish: Gloss

Cap, Snap-fitting plunger

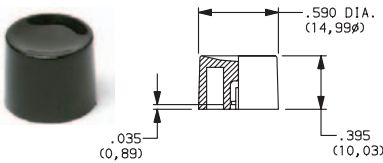


**PART NO.**

- 894001000 WHITE
- 894002000 BLACK
- 894003000 RED
- 894004000 ORANGE
- 894005000 YELLOW
- 894009000 GRAY

Material: Nylon  
Finish: Gloss

Cap, Snap-fitting plunger

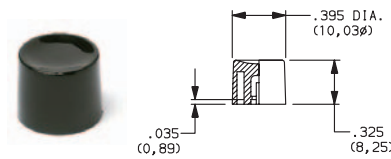


**PART NO.**

- 894101000 WHITE
- 894102000 BLACK
- 894103000 RED
- 894104000 ORANGE
- 894105000 YELLOW
- 894109000 GRAY

Material: Nylon  
Finish: Gloss

Cap, J80, J81 & J82 options only

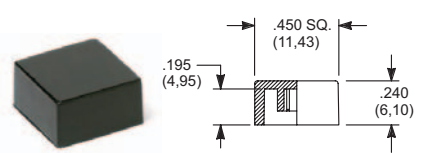

**PART NO.**

- 484601000 WHITE
- 484602000 BLACK
- 484603000 RED
- 484604000 ORANGE
- 484605000 YELLOW
- 484609000 GRAY


Material: Nylon  
Finish: Gloss

**PART NO.**

- 798201000 WHITE
- 798202263 BLACK
- 798203000 RED
- 798204000 ORANGE
- 798205000 YELLOW
- 798209000 GRAY

Material: Nylon  
Finish: Matte

Cap, J86 & J96 options only

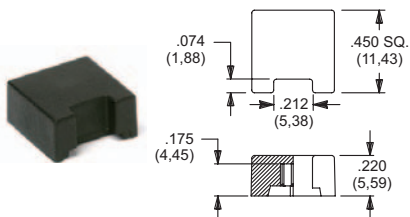

**PART NO.**

- 459701000
- 459702000
- 459703000
- 459704000
- 459705000
- 459709000

Material: Nylon  
Finish: Gloss

**PART NO.**

- 476801000 WHITE
- 476802000 BLACK
- 476803000 RED
- 476804000 ORANGE
- 476805000 YELLOW
- 476809000 GRAY

Material: Nylon  
Finish: Matte

Frame



**PART NO.**

- 615602263 BLACK

Material: Nylon  
Finish: Matte

Frame



**PART NO.**

- 613302263 BLACK

Material: Nylon  
Finish: Matte

**NOTE:** Additional nuts, locking rings and lockwashers available separately, see section N.

Other cap & frame colors available, consult Customer Service Center.



Third Angle Projection  
Dimensions are shown: IN (mm)  
Dimensions subject to change

# C&K 8060 Series Alternate Action and Momentary Pushbutton Switches

## AVAILABLE HARDWARE

Fits Z3 Termination  
female connector

**PART NO.**  
**530100000**

Available in loose pieces.





A

Pushbutton


Frames snap into panel opening and are independent from switch mounting. Accurate positioning of the PC mounted switch relative to the panel opening is necessary to provide proper clearance between actuator and frame. Available in two basic styles and four panel thicknesses .047-.125 in. Material: Nylon. Finish: Matte.

### TYPICAL APPLICATION



.047" (1,19) PANEL THK.	.062" (1,57) PANEL THK.	.090" (2,29) PANEL THK.	.125" (3,18) PANEL THK.
<b>PART NO.</b> <b>432502263</b>	<b>PART NO.</b> <b>432602263</b>	<b>PART NO.</b> <b>432702263</b>	<b>PART NO.</b> <b>432802263</b> BLACK


### PANEL MOUNTING

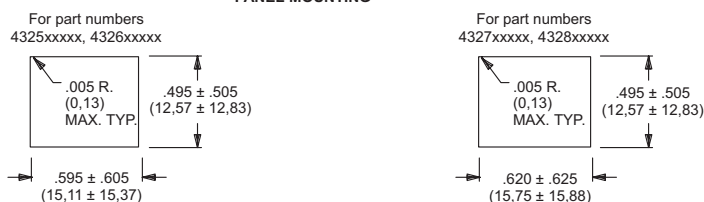

### Panel Inserts

Above frames (part nos. 432XXXXXX) are also available with insert which accepts LED for indicator light assembly. Order insert separately from frame. Blank insert panel (without hole for LED) also available. **LED not included.**

L.E.D. (.200 DIA. (5,080)) SNAPS  
SECURELY INTO INSERT (P/N 8949).  
HEIGHT DEPENDS ON L.E.D. USED.

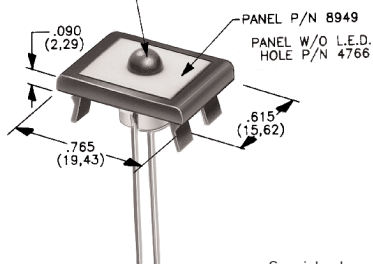

PANEL INSERT  
WITH HOLE FOR LED

**PART NO.**  
**894902000**

BLANK PANEL INSERT  
WITHOUT HOLE FOR LED

**PART NO.**  
**476602000** BLACK


Special colors, custom markings available, consult Customer Service Center.

### LED INFORMATION

SWITCHES WITH LED SUPPLIED: J86 OPTION:

Rectangular LEDs are supplied on 8060 Series pushbutton switches with J86 option. These LEDs are factory installed and are not replaceable. The following specifications apply:

OPTION CODE	COLOR	TYP. INTENSITY	TYP. FORWARD VOLTAGE	TYP. FORWARD CURRENT	MAX RATINGS AT 25°C AMBIENT TEMPERATURE		
					FORWARD VOLTAGE	CONTINUOUS FORWARD CURRENT	POWER DISSIPATION
6	Green	1.0 mcd	21 V	20 mA	2.5 V	50 mA	125 mW
3	Red*	0.5 mcd		10 mA		30 mA	75 mW
5	Yellow	4.0 mcd		20 mA		50 mA	125 mW

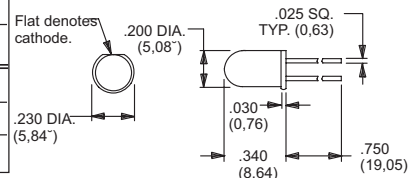

Suggested LED for J82 & J84 options.  
Dimensions for reference only.

**Process Information:** Soldering to LED leads must be completed within 5 seconds at 500°F (260°C) maximum.

**Caution:** Circuit elements must limit forward current of LED to 50mA max. continuous.

\*Extra-bright red LED available (typ. intensity 4.5 mcd), consult Customer Service Center.

LEDs are not supplied with J82 & J84 options. LED snaps into switch frame surrounding actuator and is wired externally.