



	LBB110	Units
Load Voltage	350	<b>V</b>
Load Current	120	mA
Max R <sub>ON</sub>	35	Ω

#### **Features**

- Small 8 Pin DIP Package
- Low Drive Power Requirements (TTL/CMOS Compatible)
- · No Moving Parts
- High Reliability
- · Arc-Free With No Snubbing Circuits
- 3750V<sub>RMS</sub> Input/Output Isolation
- FCC Compatible
- VDE Compatible
- No EMI/RFI Generation
- · Machine Insertable, Wave Solderable
- Surface Mount and Tape & Reel Versions Available

### **Applications**

- Telecommunications
  - Telecom Switching
  - · Tip/Ring Circuits
  - · Modem Switching (Laptop, Notebook, Pocket Size)
  - Hookswitch
  - Dial Pulsing
  - Ground Start
  - Ringer Injection
- Instrumentation
  - Multiplexers
  - Data Acquisition
  - · Electronic Switching
  - I/O Subsystems
  - Meters (Watt-Hour, Water, Gas)
- Medical Equipment—Patient/Equipment Isolation
- Security
- Aerospace
- Industrial Controls

#### **Description**

The LBB110 is a Dual 1 Form B solid state relay that has two independently controlled optically coupled MOSFETs. The efficient MOSFET switches and photovoltaic die use Clare's patented OptoMOS® architecture to provide 3750  $V_{\rm RMS}$  of input to output isolation. The optically coupled inputs are controlled by highly efficient GaAlAs infrared LEDs. Dual pole OptoMOS relays provide a more compact design solution than discrete single pole relay in a variety of applications. The dual pole relays save board space by incorporating both relays in a single 8-pin package.

#### **Approvals**

- UL Recognized: File Number E76270
- CSA Certified: File Number LR 43639-10
- · BSI Certified to:
  - BS EN 60950:1992 (BS7002:1992)

Certificate #: 7344


BS EN 41003:1993
Certificate #: 7344

# **Ordering Information**


Part #	Description
LBB110	8 Pin DIP (50/Tube)
LBB110P	8 Pin Flatpack (50/Tube)
LBB110PTR	8 Pin Flatpack (1000/Reel)
LBB110S	8 Pin Surface Mount (50/Tube)
LBB110STR	8 Pin Surface Mount (1000/Reel)

# **Pin Configuration**

#### **LBB110 Pinout**



# Switching Characteristics of Normally Closed (Form B) Devices





# Absolute Maximum Ratings (@ 25° C)

Parameter	Min	Тур	Max	Units
Input Power Dissipation	-	-	150 <sup>1</sup>	mW
Input Control Current	-	-	50	mA
Peak (10ms)	-	-	1	Α
Reverse Input Voltage	-	-	5	V
Total Power Dissipation	-	-	800 <sup>2</sup>	mW
Isolation Voltage				
Input to Output	3750	-	-	$V_{RMS}$
Operational Temperature	-40	-	+85	°C
Storage Temperature	-40	-	+125	°C
Soldering Temperature				
(10 Seconds Max.)				
DIP Package	-	-	+260	°C
Flatpack/Surface Mount				
Package	-	-	+220	°C

in excess of these ratings can cause permanent damage to the device. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this data sheet is not implied. Exposure of the device to the absolute maximum ratings for an extended period may degrade the device and effect its reliability.

Absolute Maximum Ratings are stress ratings. Stresses

### **Electrical Characteristics**

Parameter	Conditions	Symbol	Min	Тур	Max	Units
Output Characteristics @ 25°C						
Load Voltage (Peak)	-	$V_{L}$	-	-	350	V
Load Current* (Continuous)	-	l <sub>i</sub>	-	-	120	mA
Peak Load Current	10ms	I <sub>I PK</sub>	-	-	350	mA
On-Resistance	I <sub>I</sub> =120mA	R <sub>ON</sub>	-	25	35	Ω
Off-State Leakage Current	V <sub>L</sub> =350V	-	-	-	1	μΑ
Switching Speeds	_					
Turn-On	I <sub>F</sub> =5mA,V <sub>L</sub> =10V	$T_{ON}$	-	-	3	ms
Turn-Off	I <sub>F</sub> =5mA,V <sub>L</sub> =10V	$T_{OFF}$	-	-	3	ms
Output Capacitance	50V; f=1MHz	$C_OUT$	-	25	-	pF
Input Characteristics @ 25°C						
Input Control Current	I <sub>I</sub> =120mA	I <sub>F</sub>	5	-	50	mA
Input Dropout Current	-	I <sub>F</sub>	0.4	0.7	-	mA
Input Voltage Drop	I <sub>F</sub> =5mA	V <sub>F</sub>	0.9	1.2	1.4	V
Reverse Input Voltage	-	V <sub>R</sub>	-	-	5	V
Reverse Input Current	V <sub>R</sub> =5V	l <sub>L</sub>	-	-	10	μΑ
Input to Output Capacitance	-	$V_{C/O}$	-	3	-	pF
Input to Output Isolation	-	V <sub>I/O</sub>	3750	-	-	$V_{RMS}$


 $<sup>{}^{\</sup>star}\text{Note: If both poles operate simulataneously load current must be derated so as not to exceed the package power dissipation value.}$ 

<sup>&</sup>lt;sup>1</sup> Derate Linearly 1.33 mw/°C

<sup>&</sup>lt;sup>2</sup> Derate Linearly 6.67 mw/<sup>-</sup>C




#### **PERFORMANCE DATA\***

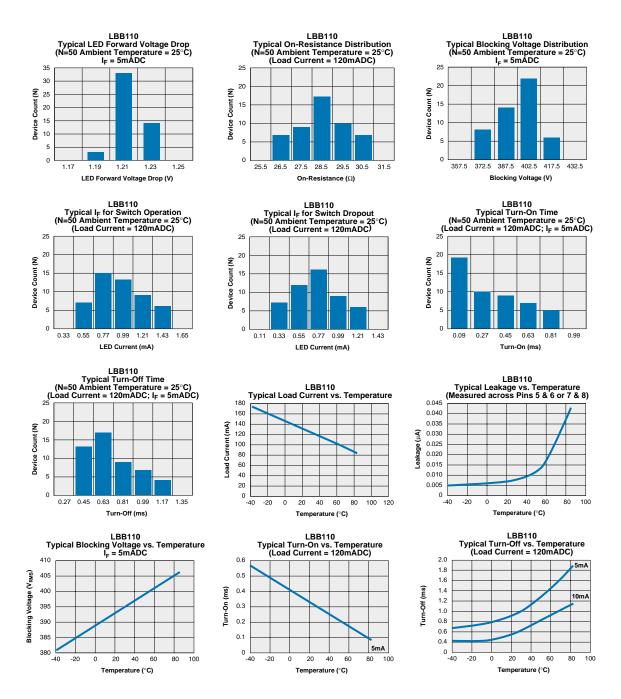

The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.



#### **PERFORMANCE DATA\***

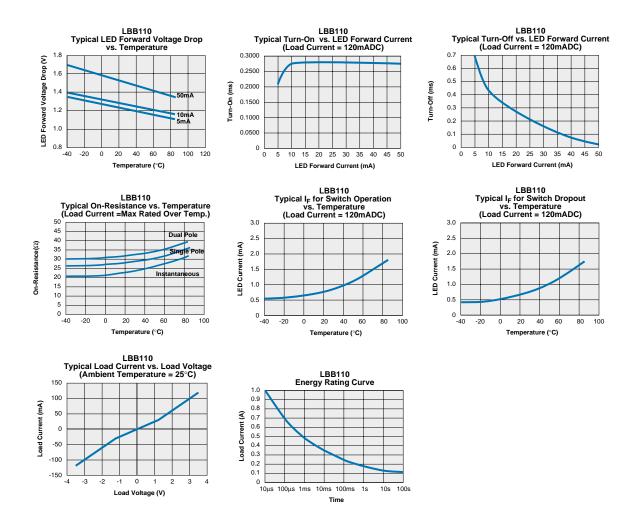



<sup>\*</sup>The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.




#### **Mechanical Dimensions**


#### 8 Pin DIP Through Hole (Standard)









#### 8 Pin DIP Surface Mount ("S" Suffix)

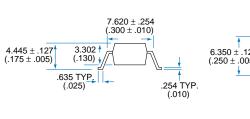





# PC Board Pattern




# 8 Pin Flatpack ("P" Suffix)





# PC Board Pattern (Top View)




Dimensions mm (inches)




#### **Mechanical Dimensions**

#### Tape and Reel Packaging for 8 Pin Surface Mount Package

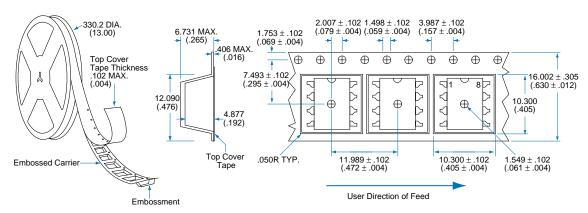

#### Tape and Reel Packaging for 8 Pin Flatpack Package

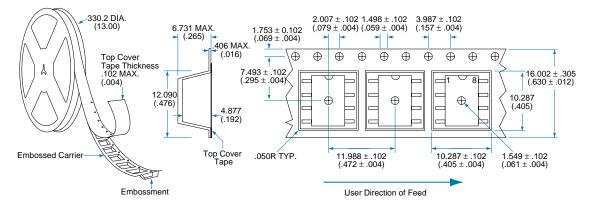

Dimensions mm (inches)



# For additional information please visit our website at: www.clare.com

Clare, Inc. makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses nor indemnity are expressed or implied. Except as set forth in Clare's Standard Terms and Conditions of Sale, Clare, Inc. assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of Clare's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. Clare, Inc. reserves the right to discontinue or make changes to its products at any time without notice.