

## Series A2000, LP2000 & CB2000

### Single Row Terminal Blocks

#### SPECIFICATIONS

**Rating:** A2: 30A, 300V\*

LP2: 30A, 150V\*

CB2: 30A, 300V\*

**Center Spacing:** .375" or 3/8" (9.52 mm)

**Wire Range:** #12-22 AWG CU

**Screw Size:** #6-32 zinc plated philslot

**Torque Rating:** 9 in-lb.

**Base:** Standoffs standard for easy flux washing

**Distance Between Barriers:** .32" (8.1 mm)

**Recommended PCB Hole Diameter:** .076" (1.93 mm)

**Operating Temperature:** 105°C (221°F) max., -40°C (-40°F) min.

**Molded Material:** Black, UL Rated 94V0 Thermoplastic

**Breakdown Voltage:** 3400V (A2 & LP2); 4100V (CB2).

**Agency Information:** UL/CSA; IEC Compliance;

CE Certified

\*30A Rating achieved with a #10 copper wire crimped to a ring terminal.;  
20A Rating without ring terminal.

A20510807WR




LP202110




CB20210507

#### A2000 & LP2000 Series

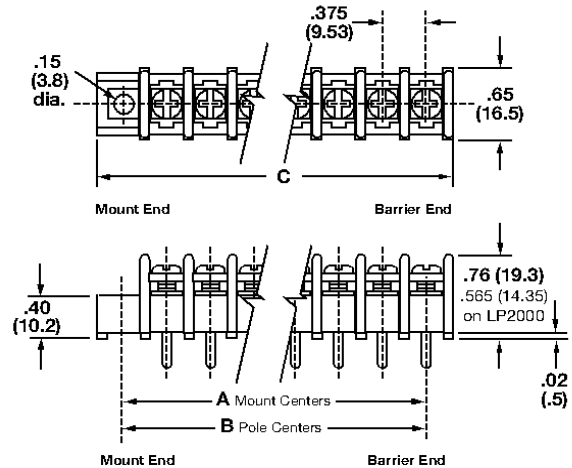

#### CB2000 Series

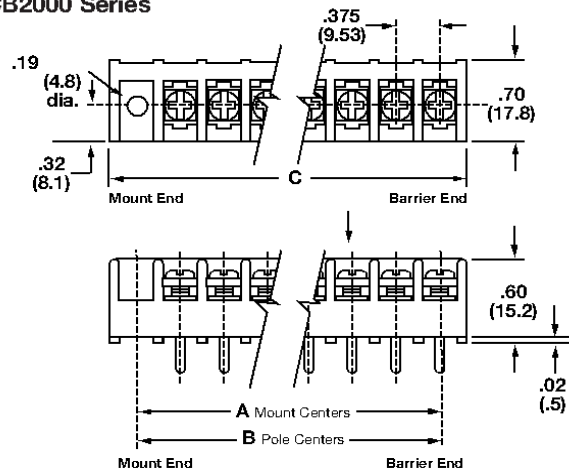

Poles	MOUNTING ENDS ONLY		BARRIER & MOUNTING ENDS B Pole Ctrs.	BARRIER ENDS ONLY C Length
	A Mount Ctrs.	C Length		
02	1.13	1.56	.38	.81
03	1.50	1.93	.75	1.18
04	1.88	2.30	1.13	1.56
05	2.25	2.68	1.50	1.93
06	2.63	3.06	1.88	2.31
07	3.00	3.43	2.25	2.68
08	3.38	3.81	2.63	3.06
09	3.75	4.18	3.00	3.43
10	4.13	4.56	3.38	3.81
11	4.50	4.93	3.75	4.18
12	4.88	5.31	4.13	4.56
13	5.25	5.69	4.50	4.93
14	5.63	6.06	4.88	5.31
15	6.00	6.43	5.25	5.68
16	6.38	6.81	5.63	6.06
17	6.75	7.18	6.00	6.43
18	7.13	7.56	6.38	6.81
19	7.50	7.93	6.75	7.18
20	7.88	8.31	7.13	7.56
21	8.25	8.68	7.50	7.93
22	8.63	9.06	7.88	8.31
23	9.00	9.43	8.25	8.68
24	9.38	9.81	8.63	9.06
25	9.75	10.18	9.00	9.43
26	10.13	10.56	9.38	9.81
27	10.50	10.93	9.75	10.18
28	10.88	11.31	10.13	10.55
29	11.25	11.68	10.50	10.93
30	11.63	12.05	10.88	11.31
31			11.25	11.68
32			11.63	12.05

\* Dimensions in inches. To convert to millimeters, multiply by 25.4.

## Series A2000 & LP2000


### Single Row Terminal Blocks

### Part Numbering System

Series	Terminal Style	Base/End	Poles	Screw Options	Options
<b>A</b> <b>2</b>					
<b>LP</b> <b>2</b>					
<b>A2</b> - standard barrier <b>LP2</b> - low profile barrier	<b>01</b> - handwired <b>02</b> - printed circuit <b>03</b> - non feed-thru <b>04</b> - wire wrap tail <b>05</b> - extended handwired <b>06</b> - handwired <b>07</b> - extended pin <b>08</b> - printed circuit <b>09</b> - .250 QC short <b>10</b> - .187 QC <b>14</b> - printed circuit <b>19</b> - .250 QC long	<b>0</b> - flat base/molded mount end <b>1</b> - flat base/mnt. end <b>2</b> - flat base/barrier end <b>3</b> - insulator base/mnt. end <b>4</b> - insulator base/barrier end <b>5</b> - closed base/mount end <b>6</b> - closed base/molded mount end <b>9</b> - insulator base/molded mount end  Base/End Note: 0, 6, 9 styles not available with covers. 5 & 6 Styles only available with 03 terminals.	<b>02 to 32</b> <b>02 to 30</b> on mount end base	Blank - std. screw <b>00</b> - screws shipped bulk <b>03</b> - stainless steel <b>04</b> - brass nickel plated <b>07</b> - steel SEMS (not available with hardware options) <b>09</b> - brass SEMS nickel plated (not available with hardware options) <b>CA</b> - captive screw <b>03CA</b> - stainless steel captive <b>04CA</b> - brass captive <b>07CA</b> - SEMS captive <b>09CA</b> - brass SEMS captive <b>07WR</b> - steel SEMS wire ready (not available on LP2)	<b>AB</b> - angle mnt. options (pg 9) <b>A1 to A9</b> - .250" QC <b>B1 to B9</b> - .187" QC <b>DR</b> - drilled right angle (pg 9) <b>JA, JB &amp; JC</b> - barrier jumpers <b>L1 to L6</b> marking options (pg 22) <b>MP, MP8 &amp; MT</b> mounting plates (pg 9) <b>OJ2 &amp; OJ4</b> - over barrier jumpers (not available w/covers) <b>RC</b> - retaining clips (pg 9) <b>R30 to R77</b> - right angle bends (pg 9) <b>SO</b> - stand off insulators (pg 9) <b>S1</b> - solder lug/flat  <b>Covers</b> - (pg 23)

### Terminal Styles

Inches (Millimeters)

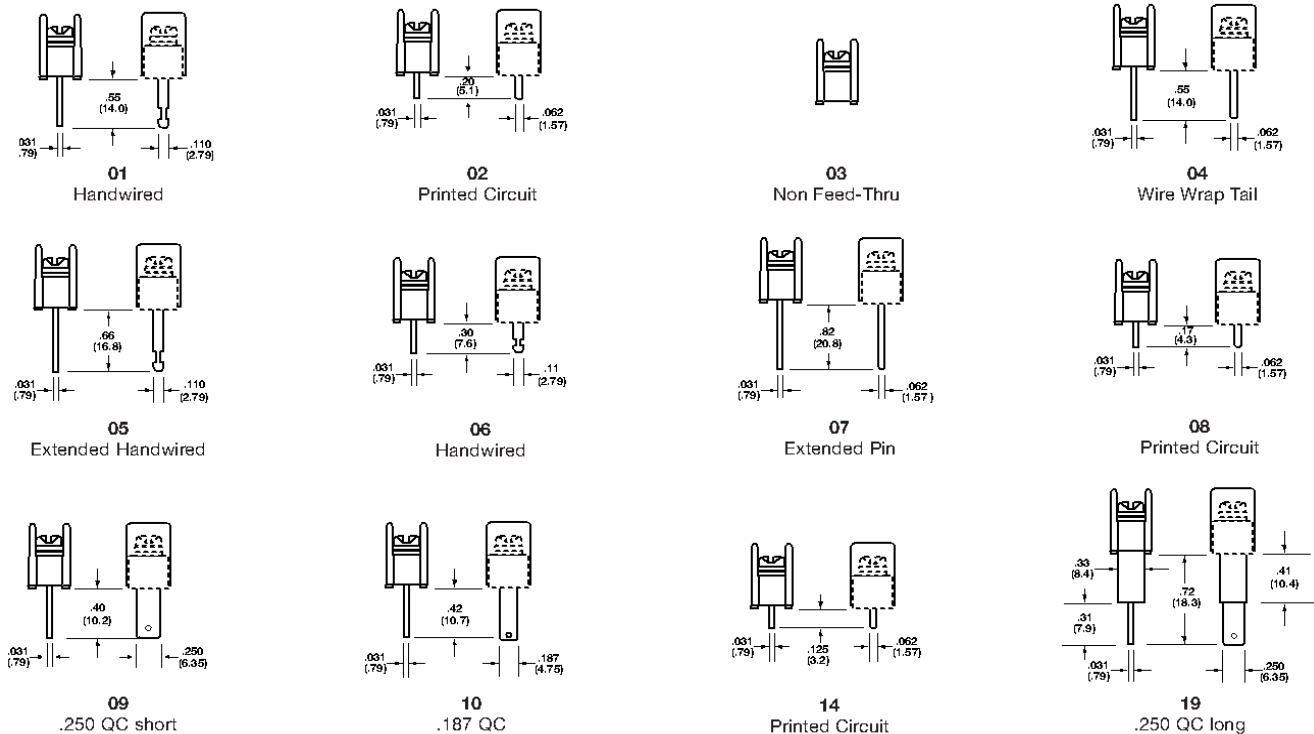

## Series A2000 & LP2000

Single Row Terminal Blocks *Continued*

### Screw Options



**Standard**  
Zinc Plated Steel



**03**  
Stainless Steel



**04**  
Brass  
Nickel Plated



**07**  
Steel SEMS



**09**  
Brass SEMS  
Nickel Plated




**07WR**  
Wire Ready  
(A2 only)

### Hardware Options (Bulk ordering part numbers are in parentheses.)


Inches (Millimeters)

#### Solder Lugs




**S1**  
(2S1)


#### Jumpers



**JA**  
(JA2-XX)



**JB**  
(JB2-XX)



**JC**  
(JC2-XX)




**OJ2**




**OJ4**

#### Quick Connects


Blade Width A = .250" Blade Width B = .187"




**A1 & B1**  
(2A1 & 2B1)




**A4 & B4**  
(2A4 & 2B4)




**A7 & B7**  
(2A7 & 2B7)




**A2 & B2**  
(2A2 & 2B2)




**A5 & B5**  
(2A5 & 2B5)




**A8 & B8**  
(2A8 & 2B8)



**A3 & B3**  
(2A3 & 2B3)




**A6 & B6**  
(2A6 & 2B6)




**A9 & B9**  
(2A9 & 2B9)

### Base/End Options




SECTION A-A

0, 6 & 9  
Molded Mount End



SECTION B-B

1, 3 & 5  
Mount End



## Series A2000 & LP2000


### Single Row Terminal Blocks *Continued*

## Mounting Options


### Right Angle Bends (A2, LP2 only)

Right angle terminals are offered on the A2000 & LP2000 Series. Configurations are defined in these dimensions: X = pin extension beyond the block base; Z = length from block base to centerline of the terminal tip. Standard bends consist of the X and Z dimensions shown in the chart. Specify by adding the selected Bend Option Code to the terminal part no.

### 07 Terminal Bend Configurations



### 04 Terminal Bend Configurations




Bend Option Code	X (minimum)	Z	Available w/insulator base
R30	-.04	.28	No
R35	.01	.23	No
R36	.02	.22	No
R39	.05	.19	No
R42	.08	.16	No
R46	.12	.12	No
R48	.14	.10	No
R50	.16	.08	No

Bend Option Code	X (minimum)	Z	Available w/insulator base
R30	-.04	.55	Yes
R35	.01	.50	Yes
R36	.02	.49	Yes
R42	.08	.43	Yes
R46	.12	.39	Yes
R50	.16	.35	No
R53	.19	.32	No
R66	.32	.19	No
R69	.35	.16	No
R75	.41	.10	No
R77	.43	.08	No

Dimensions in inches. To convert to millimeters, multiply by 25.4.


### Angle Brackets (A2, LP2 only)

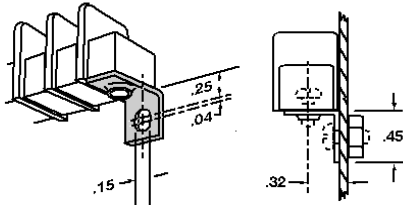

#### Option AB

Angle brackets enable block to be fastened at right angles to normal mount position. Bulk part no. **2AB**.


### Drilled Right Angle (A2, LP2 only)

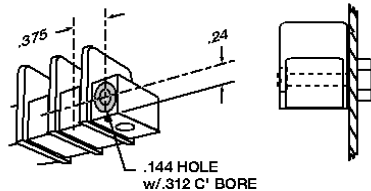

#### Option DR

Counterbored holes across mount ends of block enable fastening with two screws at right angles to normal mount position.


### Mounting Plates

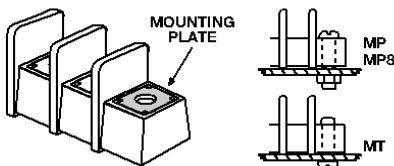

#### Options MP, MP8 & MT

**MP** Metal inserts with .150" dia. hole accept #6 screw. **MP8** Metal inserts with .187" dia. hole accept #8-32 screw. **MT** Metal inserts with tapped hole accept #6-32 screw.


### Standoffs

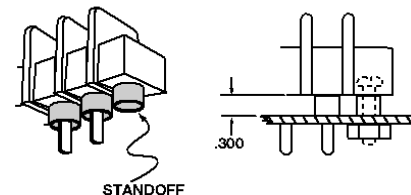

#### Option SO

Standoff mounts are tubes molded to the mounting positions. Available with insulator bases only.

### Retaining Clip

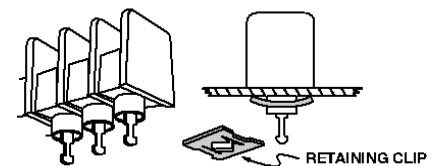

#### Option RC

Use on standoff tubes. Fit panels up to .125" thick. Two clips for every five positions. Supplied unassembled. Bulk Part No. **H541**.