

INTRODUCTION


1. Two-stage filters provide high performance in suppressing both line-to-line and line-to-ground noise.
2. All part numbers are UL recognized, CSA certified and VDE approved.

COMPONENT

PART NO.	C1,C2,C3(μF)	L1,L2(mH)
02DRCG5	0.1	2.4
02DRCW5		
03DRCG5	0.22	1.7
03DRCW5		
03DRDG3S		2.8
03DRDW3S		
05DRCG5		1.6
05DRCW5		
05DRDG3	1.0	
05DRDG3S		
05DRDW3S		
10DRCG5		
10DRCS5	0.1	0.9
10DRCW5		
10DRDG3		
*15DRCG5	0.22	1.0
•20DRGG5		
•20DRGS5		

R: 2.2MΩ, Cy: 3300pF.
 * No safety approval yet, R: 1.0MΩ
 • VDE approved to 16A/250VAC, C2: 0.33 μF

ELECTRICAL SCHEMATIC

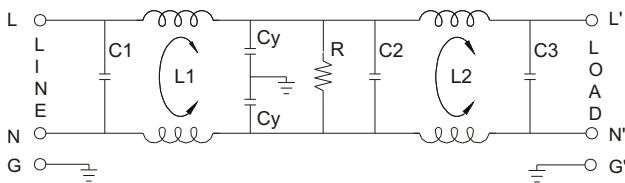

SPECIFICATION



1. Maximum leakage current each
 line-to-ground @ 115VAC 60Hz: 0.25mA
 @ 250VAC 50Hz: 0.45mA
2. Hipot rating (one minute)
 line-to-ground: 2250VDC
 line-to-line: 1450VDC
3. Operating frequency: 50/60Hz
4. Rated voltage: 115/250VAC

SERIES DIMENSION

PART NO.	DIMENSIONS IN INCHES/mm				
	A	B	C	D	E
02DRCG5	3.25	1.82	2.38	2.77	70.4
	82.5				
02DRCW5	2.08	46.2	60.5	2.77	70.4
	52.8				
03DRCG5	3.75	2.02	2.94	3.34	84.8
	95.2				
03DRCW5	2.58	2.04	1.15	74.7	84.8
	65.5				
03DRDG3S	3.14	2.02	1.575	0.61	15.5
	79.8				
03DRDW3S	2.55	51.3	40.01	3.34	84.8
	64.8				
05DRCG5	3.75	2.04	2.94	3.34	84.8
	95.2				
05DRCW5	2.58	2.04	74.7	3.34	84.8
	65.5				
05DRDG3	4.33	2.20	1.25	0.63	16.0
	110.0				
05DRDG3S	3.14	2.02	1.575	0.61	15.5
	79.8				
05DRDW3S	2.55	51.3	32.3	40.01	15.5
	64.8				
10DRCG5	3.75	2.22	1.52	2.94	3.34
	95.2				
10DRCS5	2.50	56.4	38.6	74.4	84.5
	63.5				
10DRCW5	4.35	2.08	1.79	2.94	3.36
	110.5				
10DRDG3	3.75	52.8	45.5	74.7	85.3
	95.2				
15DRCG5	5.14	3.33	1.52	3.75	4.14
	130.5				
20DRGG5	5.25	84.6	1.29	95.3	105.1
	130.5				
20DRGS5	5.25	84.6	1.29	95.3	105.1
	130.5				

GENERAL PURPOSE TWO-STAGE FILTERS


INSERTION LOSS (TYPIC)

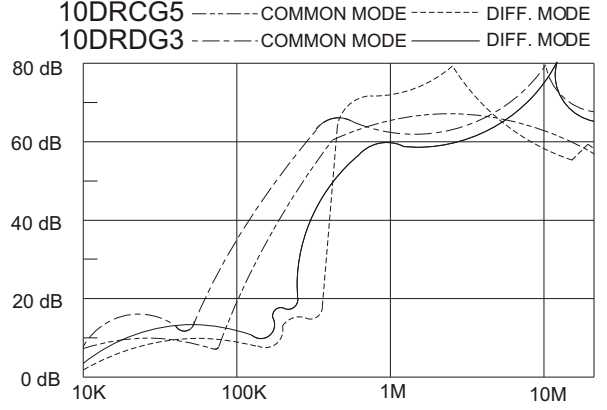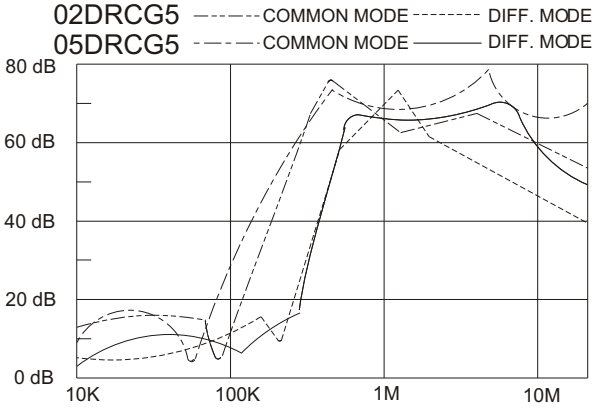


MINIMUM INSERTION LOSS IN

COMMON MODE (L-G) IN 50 OHM SYSTEM						
CURRENT RATING	FREQUENCY-MHz					
	.15	.50	1.0	5.0	10	30
2	40	60	65	55	50	40
3, 5A	40	60	65	55	50	40
3, 5A(S)	38	60	65	55	45	40
10A	30	60	65	50	45	40
15A	23	45	50	45	40	30
20A	20	35	40	50	55	40
DIFFERENTIAL MODE (L-L) IN 50 OHM SYSTEM						
2	5	50	65	60	54	46
3, 5A	5	50	65	60	54	46
3, 5A(S)	10	65	70	70	60	50
10A	7	53	60	55	45	40
15A	8	30	40	45	40	40
20A	7	55	70	50	60	40


MECHANICAL CONSTRUCT




CW5



GG5





ALL WIRE LEADS 4.0" LONG MIN.




UNIT: $\frac{\text{INCH}}{\text{mm}}$

MECHANICAL CONSTRUCT


GS5

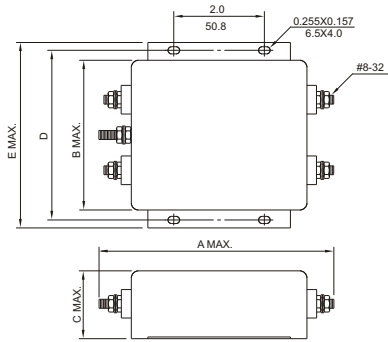


CG5




CS5



DG3/DG3S

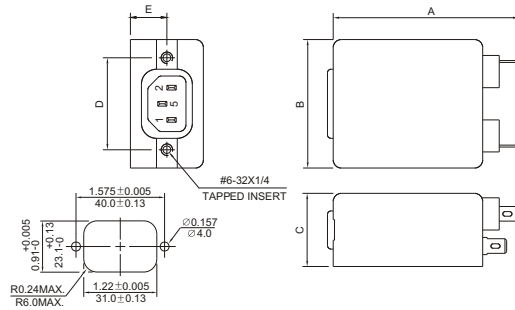

DW3S

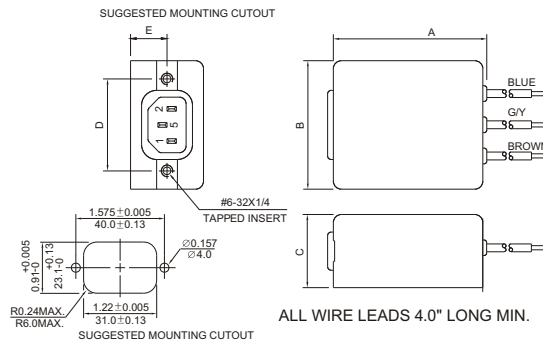

ALL WIRE LEADS 4.0" LONG MIN. UNIT: INCH / mm

GENERAL PURPOSE TWO-STAGE FILTERS