

### **Data Sheet**

### **TOP View LEDs**

## 67-21VGC/TR8

#### **Features**

- P-LCC-2 package.
- White package.
- Optical indicator.
- Colorless clear window.
- Wide viewing angle.
- Suitable for vapor-phase reflow, Infrared reflow and wave solder processes.
- Computable with automatic placement equipment.
- Available on tape and reel (8mm Tape).
- Pb-free.
- The product itself will remain within RoHS compliant version

### **Descriptions**

• The 67-21 series is available in soft orange, green, blue and yellow. Due to the package design, the LED has wide viewing angle and optimized light coupling by inter reflector. This feature makes TOP LED ideal for light pipe application. The low current requirement makes this device ideal for portable equipment or any other application where power is at a premium.

### **Applications**

- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- Light pipe application.
- General use.

#### **Device Selection Guide**

Chip Material	Emitted Color	Resin Color
GaP	Green	Water Clear



http://www.everlight.com verlight Electronics Co., Ltd. Rev.5 Page: 1 of 10 Device No.: DSE-0011324 Prepared by: Teresa Lee Prepared date: 20. Feb. 2017





## **Data Sheet**


## **TOP View LEDs**


## 67-21VGC/TR8


## **Package Dimensions**

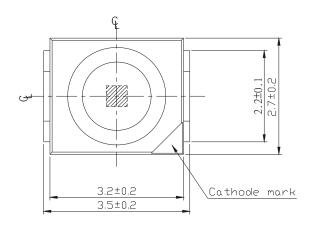




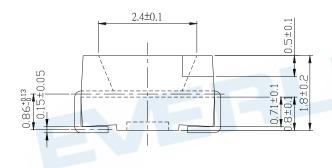





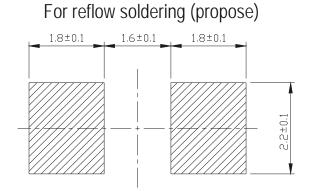

#### **Notes:** .All dimensions are in millimeters

verlight Electronics Co., Ltd. http://www.everlight.com Page: 2 of 10 Rev.5 Device No.: DSE-0011324 Prepared date:20.Feb.2017 Prepared by: Teresa Lee

Ver.:5 Release Date:03/07/2017 狀態:Approved(正式發行)



# **Data Sheet TOP View LEDs**

## 67-21VGC/TR8

## Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	VR	5	V
Forward Current	IF	30	mA
Operating Temperature	Topr	-40 ∼ +85	$^{\circ}$
Storage Temperature	Tstg	<b>-</b> 40∼ +100	$^{\circ}$ C
Soldering Temperature	Tsol	260 (for 5 second)	$^{\circ}\!\mathbb{C}$
Power Dissipation	Pd	100	mW
Peak Forward Current(Duty 1/10  @ 1KHz)	IFP	60	mA

Electro-Optical Characteristics (Ta=25°C)

		` ′				
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	7.15		112	mcd	
Viewing Angle	2 0 1/2		120		deg	
Peak Wavelength	λр		570		nm	IF=20mA
Dominant Wavelength	λd	565		575	nm	Ir-20IIIA
Spectrum Radiation Bandwidth	Δλ		30		nm	
Forward Voltage	Vf	1.7		2.4	V	
Reverse Current	Ir			10	$\mu$ A	V <sub>R</sub> =5V

verlight Electronics Co., Ltd. http://www.everlight.com Rev.5 Page: 3 of 10

Device No.: DSE-0011324 Prepared date:20.Feb.2017 Prepared by: Teresa Lee




## **Data Sheet**

## **TOP View LEDs**

## 67-21VGC/TR8

## **Typical Electro-Optical Characteristics Curves**

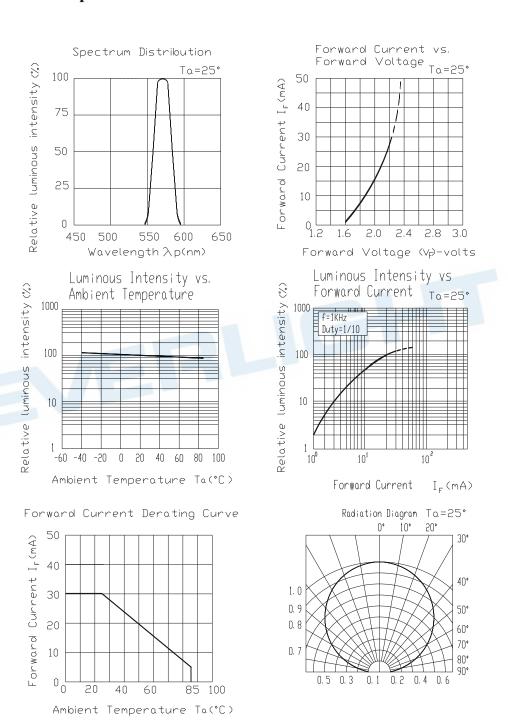

verlight Electronics Co., Ltd. http://www.everlight.com Rev.5 Page: 4 of 10 Device No.: DSE-0011324 Prepared by: Teresa Lee Prepared date:20.Feb.2017



## **Data Sheet**

## **TOP View LEDs**

## 67-21VGC/TR8

## Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 



#### **Reel Dimensions**

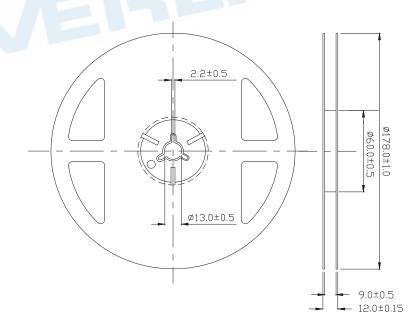

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

verlight Electronics Co., Ltd. http://www.everlight.com Rev.5 Page: 5 of 10 Device No.: DSE-0011324 Prepared date:20.Feb.2017 Prepared by: Teresa Lee

> Ver.:5 Release Date:03/07/2017 狀態:Approved(正式發行)




## **Data Sheet**

## **TOP View LEDs**


## 67-21VGC/TR8

## Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel.

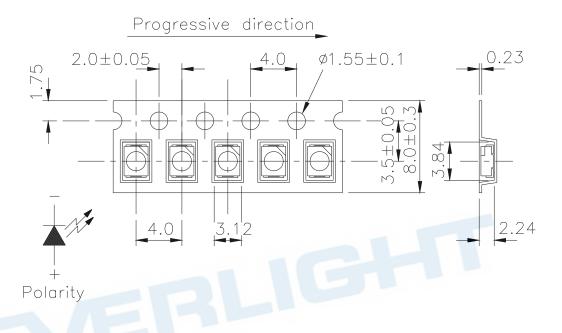

Note: The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

## **Moisture Resistant Packaging**

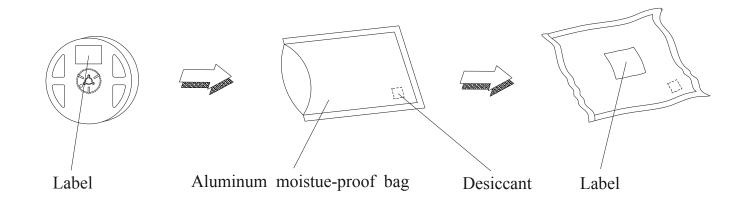

verlight Electronics Co., Ltd. Device No.: DSE-0011324

http://www.everlight.com

Rev.5

Page: 6 of 10

Prepared date:20.Feb.2017

Prepared by: Teresa Lee



# **Data Sheet TOP View LEDs**

## 67-21VGC/TR8

## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp.: 260°C±5°C Min. 5sec.	6 min	22 PCS.	0/1
2	Temperature Cycle	H: $+100^{\circ}$ C 15min $\int$ 5 min L: $-40^{\circ}$ C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

verlight Electronics Co., Ltd. http://www.everlight.com Rev.5 Page: 7 of 10 Device No.: DSE-0011324 Prepared date:20.Feb.2017 Prepared by: Teresa Lee

> 狀態:Approved(正式發行) Ver.:5 Release Date:03/07/2017




### **Data Sheet**

### **TOP View LEDs**

### 67-21VGC/TR8

#### **Precautions For Use**

- 1. Over-current-proof Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).
- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 The LEDs should be used within a year.
- 2.4 After opening the package, the LEDs should be kept at 30°C or less and 70%RH or less.
- 2.5 The LEDs should be used within 168 hours (7 days) after opening the package.
- 2.6 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions. Baking treatment :  $60\pm5^{\circ}$ C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

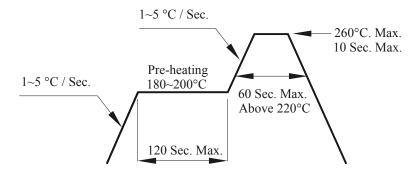

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.
- 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 280°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often

verlight Electronics Co., Ltd. http://www.everlight.com Rev.5 Page: 8 of 10 Device No.: DSE-0011324 Prepared date: 20. Feb. 2017 Prepared by: Teresa Lee

Ver.:5 Release Date:03/07/2017 狀態:Approved(正式發行)



## **Data Sheet**


## **TOP View LEDs**

67-21VGC/TR8

started at the time of the hand solder.

### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

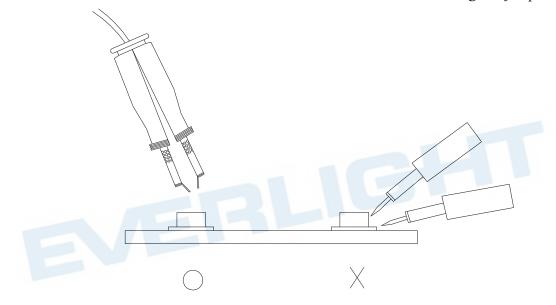

verlight Electronics Co., Ltd. http://www.everlight.com Rev.5 Device No.: DSE-0011324

Prepared date:20.Feb.2017 Prepared by: Teresa Lee

Page: 9 of 10



# **Data Sheet TOP View LEDs**

## 67-21VGC/TR8

#### DISCLAIMER

- 1. EVERLIGHT reserves the right(s) on the adjustment of product material mix for the specification.
- 2. The product meets EVERLIGHT published specification for a period of twelve (12) months from date of shipment.
- The graphs shown in this datasheet are representing typical data only and do not show guaranteed 3. values.
- When using this product, please observe the absolute maximum ratings and the instructions for using 4. outlined in these specification sheets. EVERLIGHT assumes no responsibility for any damage resulting from the use of the product which does not comply with the absolute maximum ratings and the instructions included in these specification sheets.
- 5. These specification sheets include materials protected under copyright of EVERLIGHT. Reproduction in any form is prohibited without obtaining EVERLIGHT's prior consent.
- This product is not intended to be used for military, aircraft, automotive, medical, life sustaining or 6. life saving applications or any other application which can result in human injury or death. Please contact authorized Everlight sales agent for special application request.

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd,

Tucheng, Taipei 236, Taiwan, R.O.C

Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

verlight Electronics Co., Ltd. http://www.everlight.com Rev.5 Page: 10 of 10

Device No.: DSE-0011324 Prepared date: 20. Feb. 2017 Prepared by: Teresa Lee

Ver.:5 Release Date:03/07/2017 狀態:Approved(正式發行)