



# International Components Corporation

Tel: 631-952-9595 • 800-645-9154 • Fax: 631-952-9597 • Email: [oemsales@icc107.com](mailto:oemsales@icc107.com)





## PC MOUNT SPEAKERS

**Part Number: S125R-PC**


<b>MODEL NUMBER</b>	<b>S125R-PC</b>
<b>FRAME DIAMETER (MM)</b>	<b>32</b>
<b>FRAME DEPTH (MM)</b>	<b>15</b>
<b>MAGNET TYPE</b>	<b>RARE EARTH</b>
<b>RATED POWER (WATTS): Nom. / Max.</b>	<b>0.15 / 0.2</b>
<b>VOICE COIL IMPEDANCE (OHMS)</b>	<b>8 ± 15%</b>
<b>RESONANT FREQUENCY (Hz)</b>	<b>1100 ± 20%</b>
<b>FREQUENCY RESPONSE (Hz)</b>	<b>700 ~ 4,000</b>
<b>SOUND OUTPUT LEVEL (dB)</b>	<b>83 ± 3 dB @ 1 KHz, 10 CM</b>
<b>OPERATING TEMPERATURE (°C)</b>	<b>-20°C ~ +70°C</b>
<b>MATERIAL - CONE / FRAME</b>	<b>MYLAR / NORYL</b>
<b>NET WEIGHT (GRAMS)</b>	<b>12.9</b>
<b>MOUNTING DIMENSIONS (MM)</b>	<b>2 PIN - 17.5mm</b>

**THESE SPEAKERS ARE AVAILABLE, ON A SPECIAL ORDER BASIS, IN A VARIETY OF VOICE COIL IMPEDANCES. THE MOST COMMON IMPEDANCES ARE 4, 16, 32, 45, AND 100 OHMS**

## ■ DIMENSIONS

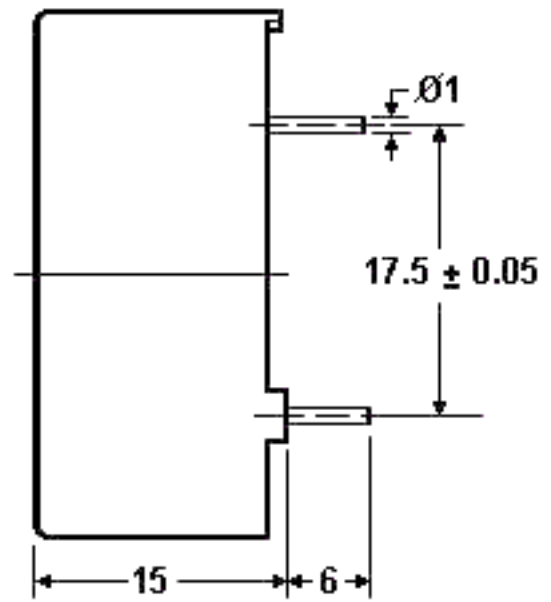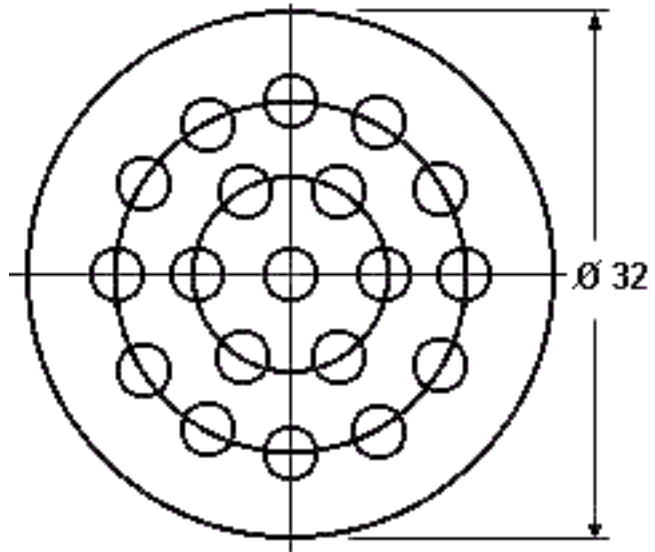

## ■ FREQUENCY

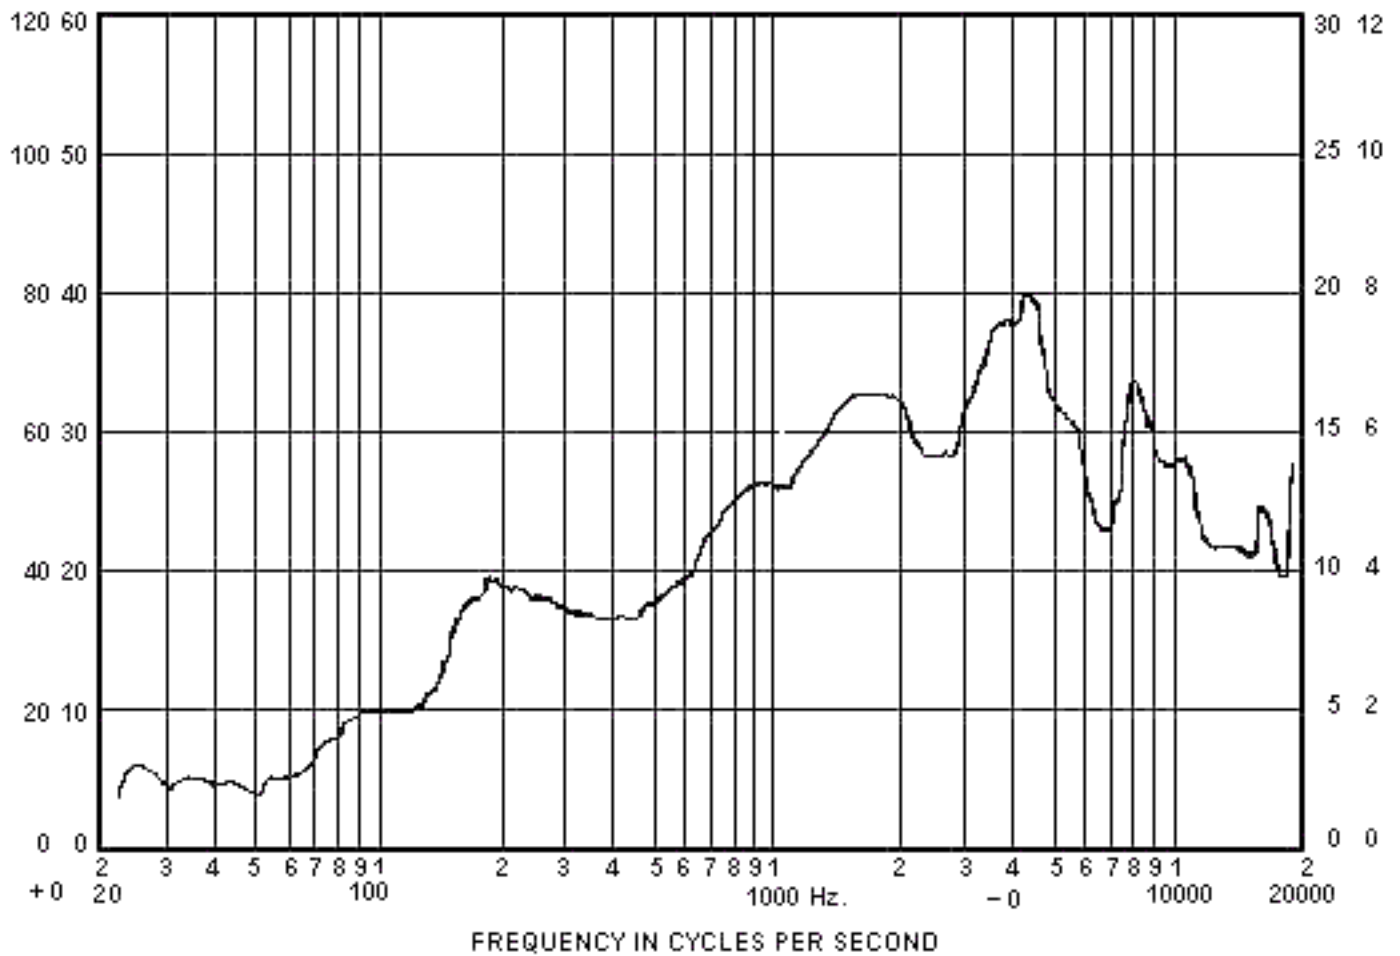

Measuring Condition: 1.41 V 0.25 W 0.1 M Impedance Range: 8  $\Omega$   
 Level Range: 60 dB Zero Level (Fundamental): 60 dB

X Axis Speed: mm/sec  
 Y Axis Speed: mm/sec

[Return to top](#)