


# HM CONNECTOR

## 2.5mm pitch/Wire-to-wire connectors - Matable with HR receptacles

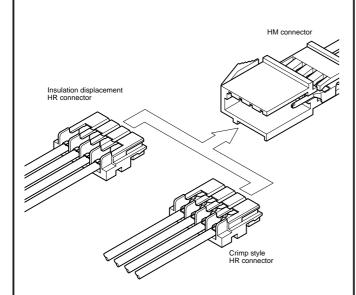

- Both crimp style and insulation displacement receptacles can be used
- Housing-to-terminal locks
- Mountable on a variety of panels
- Highly reliable housing construction

## Specifications -

• Current rating: Crimp style HR connectors type

3A AC, DC max.

Insulation displacement HR connectors type

2A AC, DC max.

• Voltage rating: 250V AC, DC max. (See Note below.)

• Temperature range: -25°C to +85°C

(including temperature rise in applying

electrical current)

• Contact resistance: Initial value/10m  $\Omega$  max.

After environmental testing/20m  $\Omega$  max.

- Insulation resistance: 500M  $\Omega$  min.
- · Withstanding voltage: 1,000V AC/minute
- Applicable wire: AWG #26 to #22

0.13 to 0.33mm<sup>2</sup>

• Applicable panel thickness: 0.8 to 1.6mm

Note: Contacts are exposed at the housing lances.

Care should be taken so that these parts do not touch the metal section of the chasis.


- \* RoHS compliant products are published.
- \* Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.
- \* Contact JST for details.


#### Standards-

Recognized E60389

⊕ Certified LR20812

#### Panel layout and Assembly layout






Circuits	Housing	Panel hole dim General	Applicable panel thickness	
	riodomig	A <sup>+0.2</sup>	B <sup>+0.2</sup>	(mm)
2	HMR-02V	13.3	3.9	
3	HMR-03V	15.8	6.4	
4	HMR-04V	18.3	8.9	0.8 ~ 1.6
8	HMR-08V	28.3	18.9	
12	HMR-12V	38.3	28.9	

- Note: 1. Punch holes in the panel according to the sketch and table shown above. Burrs must be removed.
  - 2. The strength of the panel must be considered when punching two or more holes.
  - 3. The connector must be inserted from the same side as the hole is punched.

# **HM CONNECTOR**

#### Plug / HM connector

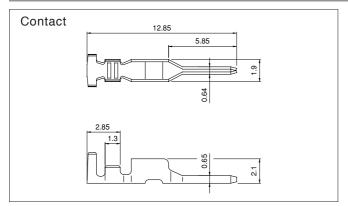

	Applicable wire		Insulation O.D.	Q´tv /	
Model No.	mm <sup>2</sup>	AWG #	(mm)	reel	
SMR-001T-0.6	0.13~0.33	26~22	1.3~1.7	9,000	


Material and Finish

Brass, tin-plated (reflow treatment)

#### RoHS compliance

Contact	Crimping	Applicator			
Contact	machine	Crimp applicator	Dies	Crimp applicator with dies	
SMR-001T-0.6	001T-0.6 AP-K2N	MKS-L	MK/SHR/MR-001-06	APLMK SHR/MR001-06	
3WIN-0011-0.0		*MKS-SC	SC/SHR/MR-001-06	APLSC SHR/MR001-06	

Note: \*Strip-crimp applicator

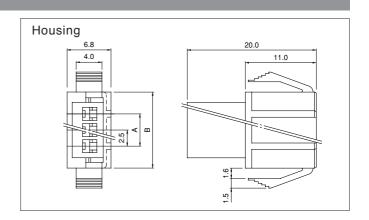


Circuits	Model No.	Dimensi	Q´ty /	
		Α	В	bag
2	HMR-02V	2.5	9.3	1,000
3	HMR-03V	5.0	11.8	500
4	HMR-04V	7.5	14.3	500
8	HMR-08V	17.5	24.3	500
12	HMR-12V	27.5	34.3	500

Material
PA 66, UL94V-0

RoHS compliance

### Receptacle/Crimp style HR connector

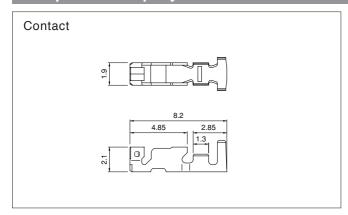

	Applicable wire		Insulation O.D.	Q´tv /
Model No.	mm²	AWG #	(mm)	reel
SHR-001T-P0.6	0.13~0.33	26~22	1.3~1.7	9,000
			-	


Material and Finish

Phosphor bronze, tin-plated (reflow treatment)

#### RoHS compliance

Contact	Crimping	Applicator			
Contact	machine	Crimp applicator	Dies	Crimp applicator with dies	
SUD MAT DO 6	01T-P0.6 AP-K2N	MKS-L	MK/SHR/MR-001-06	APLMK SHR/MR001-06	
311K-0011-F0.0	AF-NZIN	*MKS-SC	SC/SHR/MR-001-06	APLSC SHR/MR001-06	

Note: \*Strip-crimp applicator

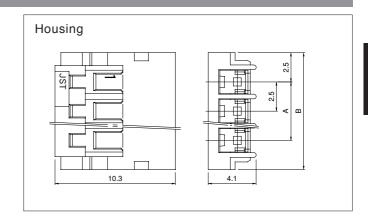

Circuits	Model No.	Dimensi	Q'ty/	
		Α	В	bag
2	HRP-02-S	2.5	7.5	2,000
3	HRP-03-S	5.0	10.0	2,000
4	HRP-04-S	7.5	12.5	1,000
8	HRP-08-S	17.5	22.5	500
12	HRP-12-S	27.5	32.5	500


Material

PA 66, UL94V-0

RoHS compliance

# **HM CONNECTOR**

# Receptacle/Insulation displacement HR connector

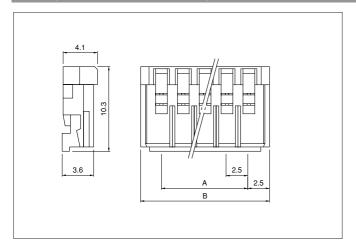

Circuito	Model No.		Dimensions (mm)		Q'ty/	
Circuits	# 28	# 26	# 24	Α	В	bág
2	02HR-8M-P-N	02HR-6S-P-N	02HR-4K-P-N	2.5	7.5	1,000
3	03HR-8M-P-N	03HR-6S-P-N	03HR-4K-P-N	5.0	10.0	1,000
4	04HR-8M-P-N	04HR-6S-P-N	04HR-4K-P-N	7.5	12.5	1,000
8	08HR-8M-P-N	08HR-6S-P-N	08HR-4K-P-N	17.5	22.5	500
12	12HR-8M-P-N	12HR-6S-P-N	12HR-4K-P-N	27.5	32.5	500

Material and Finish

Contact: Phosphor bronze, tin-plated (reflow treatment) Housing: PA 66, UL94V-0

RoHS compliance