




Long-lasting and low maintenance, LED-based light sources are an excellent solution for all lighting applications. For optimal performance, these solutions require reliable drivers matching the long lifetime of the LEDs. **The Advance Xitanium LED Outdoor Driver portfolio** offers a range of products specially designed to operate LED solutions in outdoor applications. These drivers are designed for hard-wired integration into outdoor luminaires for rugged applications. They operate to specification under wide temperature and electrical ranges to help ensure reliability.

Specifications

| Input Voltage (Vrms) | Output Power (W) | Output Voltage (V) | Output Current (A) | Efficiency@ Max Load and 70°C Case (%) | Max. Case Temp. (°C) | Input Current (Arms) | Max. Input Power (W) | THD @ Max. Load | Power Factor @ Max. Load | Surge Protection Common/ Diff (KV) | Envir. Protection Rating | Driver Type |
|----------------------|------------------|--------------------|--------------------|--|----------------------|----------------------|----------------------|-----------------|--------------------------|------------------------------------|--------------------------|------------------|
| 120 | 300 | 80 ~ 280 | 0.10 – 1.5 | 91% | 80°C | 2.73 | 330 | <20% | >0.95 | 4/4 | UL Dry & Damp, Type HL | Constant Current |
| 230 | | | | 93% | | 1.42 | | | | | | |
| 277 | | | | 93% | | 1.21 | | | | | | |

Enclosure

| | In. (mm) |
|-----------------|--------------|
| Case Length | 8.33 (211.5) |
| Case Width | 4.46 (113.3) |
| Case Height | 1.44 (36.6) |
| Mounting Length | 8.84 (224.6) |
| Mounting Width | 4.54 (115.3) |
| Overall Length | 9.47 (240.5) |



Wiring Diagram



Input and output use lead-wires.
Lead-wires are 18AWG 105C/600V solid copper.

Lead Length

Standard Lead Length is 275 mm (±30mm) on all wires outside the can.

Warning

- Install in accordance with national and local electrical codes.
- The field-wiring leads or push-in terminals shall be fully enclosed.

| Dimming Method | Dimming Range | | Other Comments |
|----------------|---------------|------------|--------------------------------------|
| 1-10V Isolated | 10% ~ 100% | | Dimming source current: 150 µA (±3%) |
| DALI | 1 ~ 254 | 10% ~ 100% | Linear or Logarithmic Variation |
| Amp Dimming | 30% ~ 100% | | Linear |
| AOC range | 0.35A to 1.5A | | |

Xitanium 929000712703

300W 120–277V 0.10–1.50A Programmable

Features

- 50,000+ hour lifetime¹
- High power design
- Programmable

Benefits

- Enables long life luminaire designs
- Allows for fewer drivers in high power luminaires
- Allows customization of the driver operation through multiple dimming protocols and performance interfaces

Application

- Area
- Roadway
- Floodlights

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Product Data

| Order Information | |
|---|---|
| Order Code | 929000712703M (Mid-Pack, 4pcs/Box) |
| Input Information | |
| Min. Mains Voltage Operational | 108V |
| Max. Mains Voltage Operational | 305V |
| Line Frequency | 50/60 Hz |
| Earth leakage current | <=0.7ma peak (IEC 61347 -1:2007 (Second edition)+A1:2010+A2:2012) <=0.75ma rms (per UL 8750) |
| Output Information | |
| Maximum Open Circuit Voltage | 380Vdc |
| Output Current Ripple (ripple = peak to average / average) | 15% max @ max lout Low frequency (≤120 Hz) content <5% |
| Output Current Tolerance (In the performance window) | <5% |
| Protections | Short Circuit, Open Circuit Protection for LED + and LED – and Temperature Foldback |
| Features | |
| Dimming | 0–10V, DALI, AmpDim and Integrated Dynadimmer |
| AOC (Adjustable Output Current) | Programmed via DALI |
| CLO (Constant Light Output) | Programmed via DALI |
| MTP (Module Temperature Protection) | Current cutback to 10% (Refer to specifications below) |
| Environment & Approbation | |
| Operating Ambient Temp. Range | –40°C to +55°C |
| Max Case Temperature (Tcase) | 80°C |
| Agency Approbations | UL8750, IEC 61347 -1:2007 (Second edition)+A1:2010+A2:2012, cUL |
| Electromagnetic Compliance | FCC 47 CFR Part 15 Class A, CISPR 15 |
| Audible Noise | <24dB Class A |
| Weight | 3.6 Lbs/1.6 kgs |

1. Advance Xitanium LED Drivers are designed and manufactured to engineering standards correlating to an average life expectancy of 50,000 hours of operation at maximum rated case temperature.

Xitanium 929000712703

300W 120-277V 0.10-1.50A Programmable

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

0-10V Dimming Curve:

Dimming source current from the driver: 150µA (±3%) (@ 0<Vdim<8V)


LED Current Tolerance at any value of Vdim: ± 5% of Imax

Minimum Dim Level: 10% or 100mA if output current is set to less than 1000mA by AOC

The dimming lead leakage current is 0.01mA. The maximum number of drivers that can be connected in parallel to one dimming control circuit is based on this dimming lead leakage current and the calculation is described in the corresponding Design-in Guide.


Approved Dimmer List

| Manufacturer | Manufacturer Part Number |
|--------------|---|
| Lutron | Visit www.lutron.com/advance for a list of dimmers (Mark VII) that will work with this driver |
| Leviton | IllumaTech IP7 series |
| Advance | Sunrise - SR1200ZTUNV |

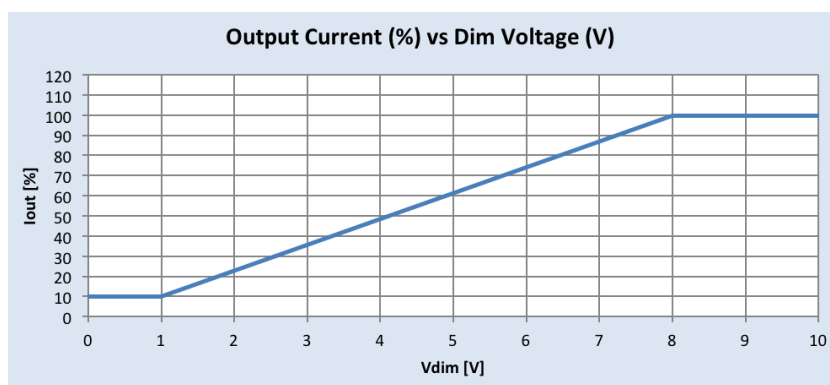

AmpDim Dimming Curve

| Parameter | Min | Max | Increments |
|------------------|---------|---------|---------------------------------|
| Start Voltage | 170Vrms | 250Vrms | 1Vrms(configurable by software) |
| Stop Voltage | 150Vrms | 230Vrms | 1Vrms(configurable by software) |
| Start Percentage | 30% | 100% | 1%(configurable by software) |
| Stop Percentage | 30% | 100% | 1%(configurable by software) |

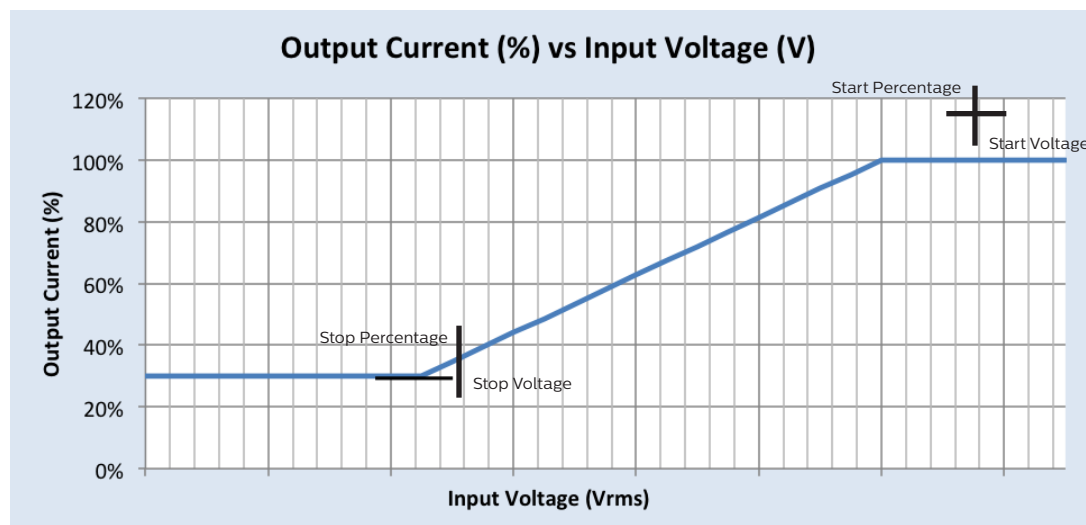

Xitanium 929000712703

300W 120-277V 0.10-1.50A Programmable

Electrical Specifications


All the specifications are typical and at 25°C Tcase unless specified otherwise.

Module Thermal Protection

Factory default: MTP enabled

Advance LED Light Engine option enabled

| MTP Option | Default Programmed Values | Dimming Range |
|--|---|---------------|
| Advance LED Light Engine | MTP start dim: 2263 ohms MTP stop dim: 1757 ohms | 100% to 10% |
| Custom: Enter Selected NTC Value and B-Constant(25-85°C) | | 100% to 10% |
| NTC1 Preset: 10k NTC Murata: NCP18XH103J03RB | | 100% to 10% |
| NTC2 Preset: 15k NTC+390ohms Murata: NCP15XW153E03RC | | 100% to 10% |

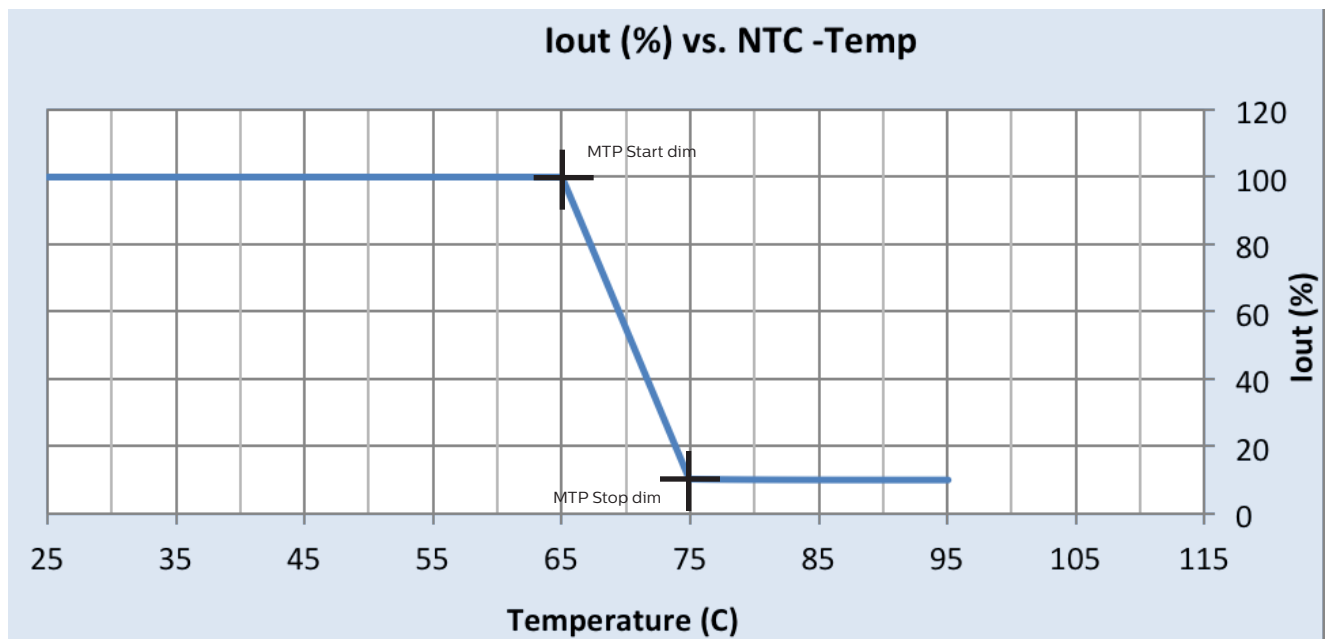


Xitanium 929000712703

300W 120-277V 0.10-1.50A Programmable

Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Operating Window

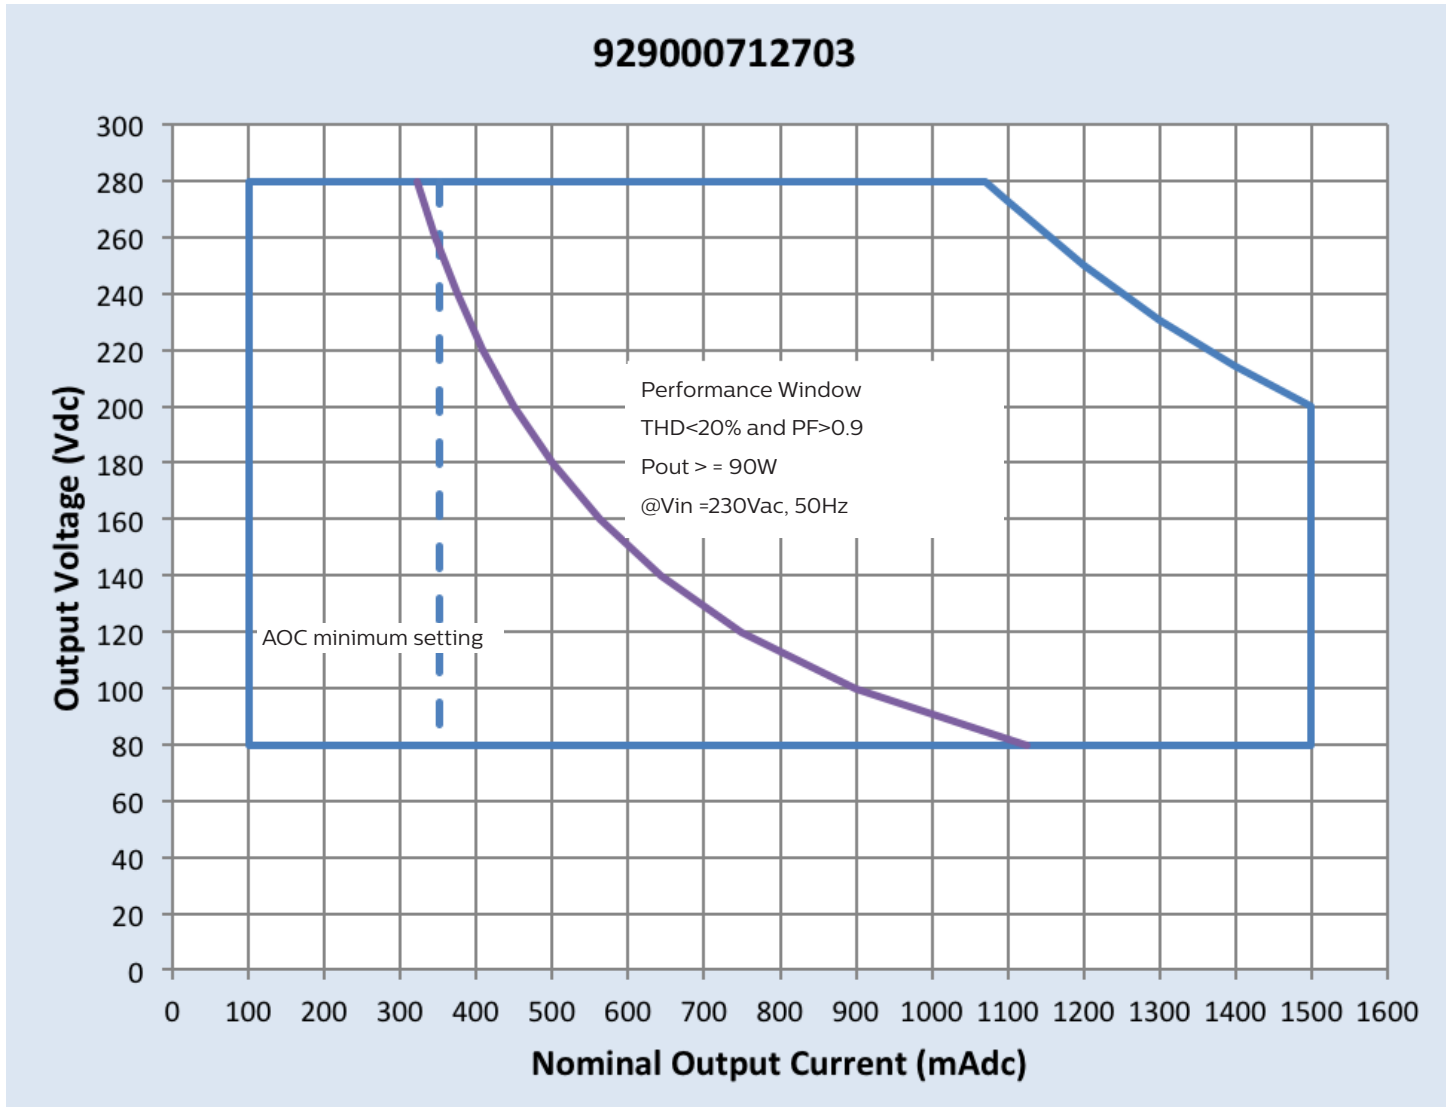

Xitanium 929000712703


300W 120-277V 0.10-1.50A Programmable

Electrical Specifications


All the specifications are typical and at 25°C Tcase unless specified otherwise.

Efficiency

120V Efficiency vs. Vout at 70°C

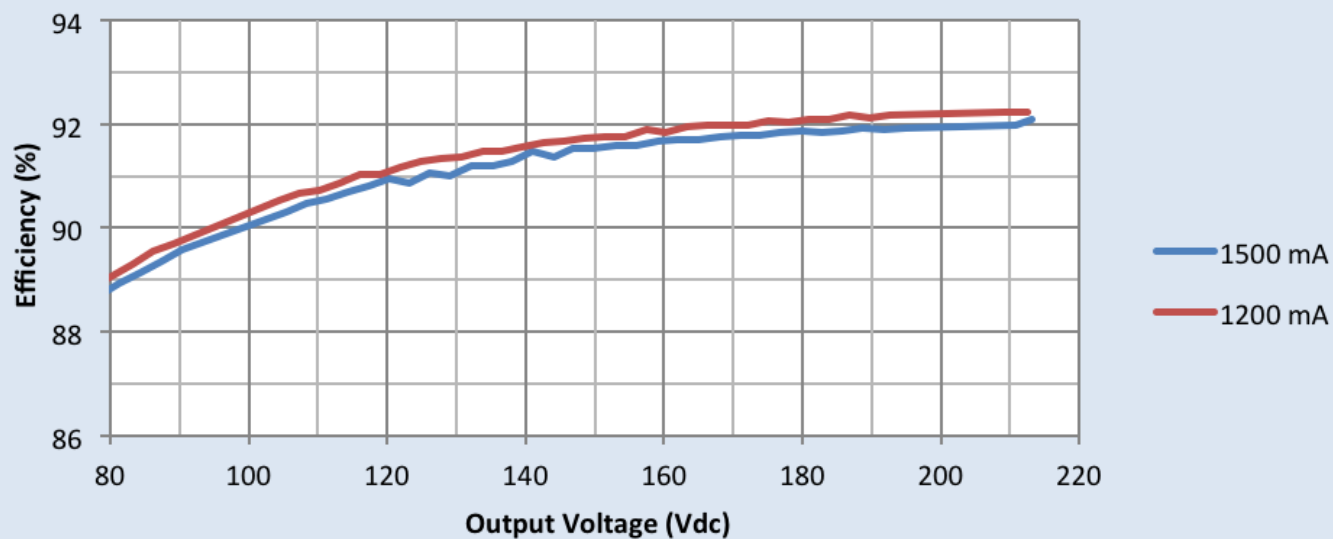

120V Efficiency vs. Vout at 70°C

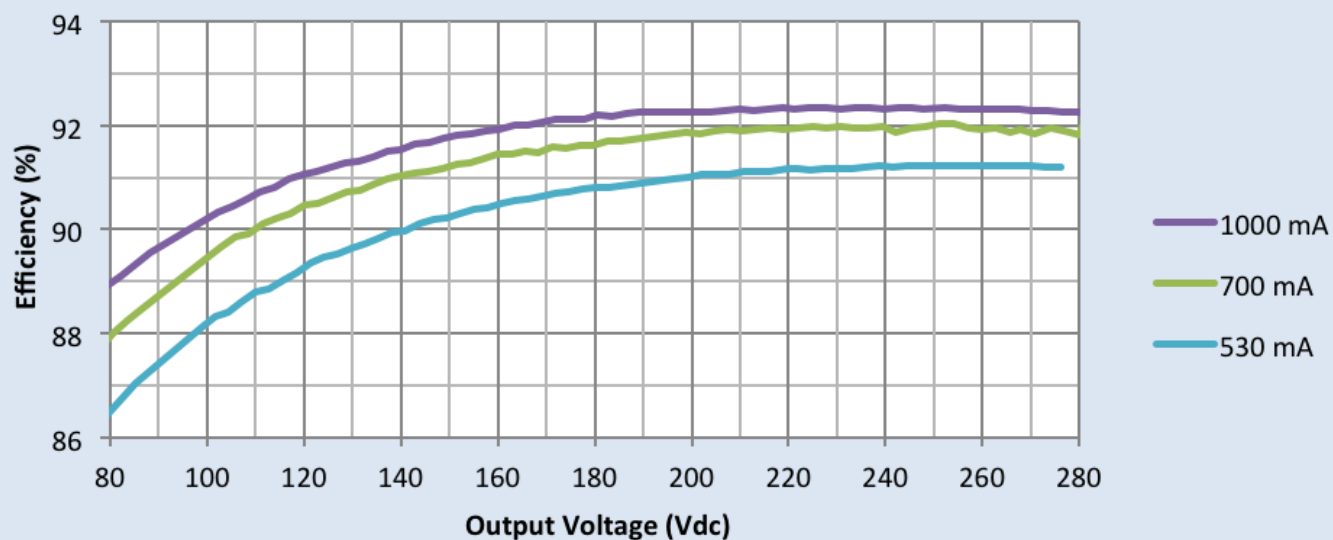

Xitanium 929000712703


300W 120-277V 0.10-1.50A Programmable

Electrical Specifications


All the specifications are typical and at 25°C Tcase unless specified otherwise.

Efficiency

230V Efficiency vs. Vout at 70°C

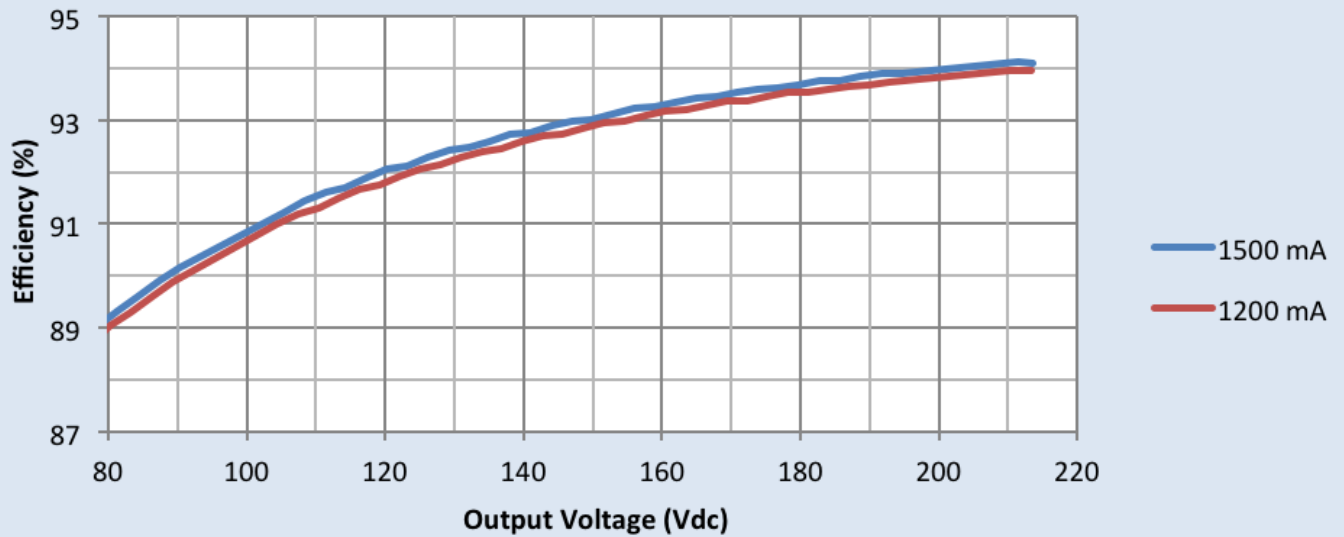

230V Efficiency vs. Vout at 70°C

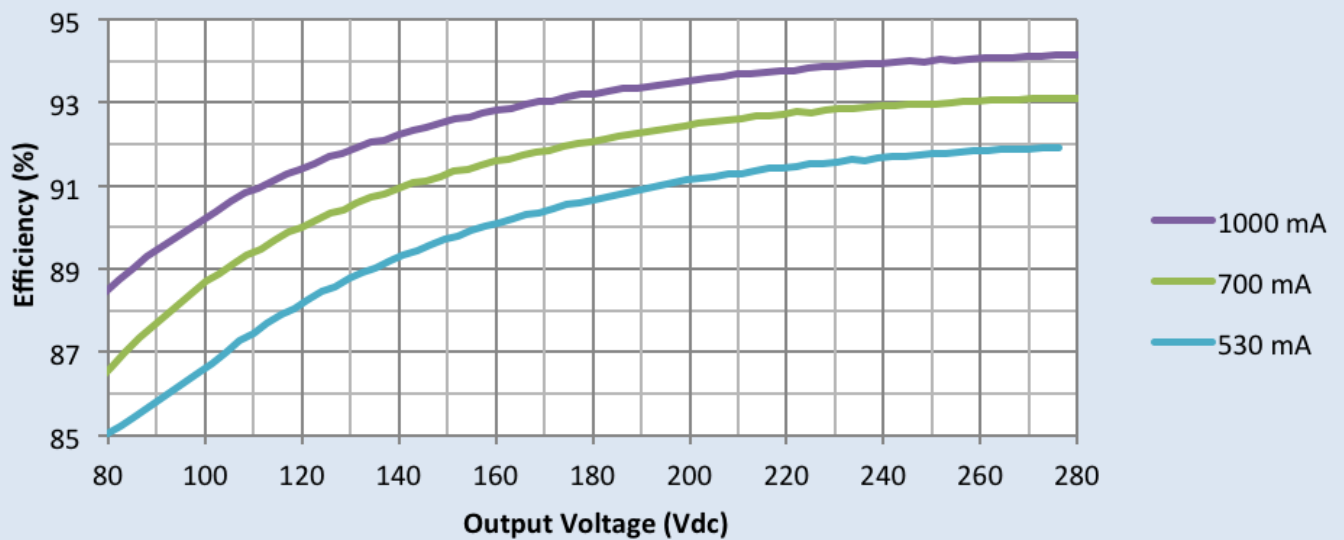

Xitanium 929000712703


300W 120-277V 0.10-1.50A Programmable

Electrical Specifications


All the specifications are typical and at 25°C Tcase unless specified otherwise.

Efficiency

277V Efficiency vs. Vout at 70°C

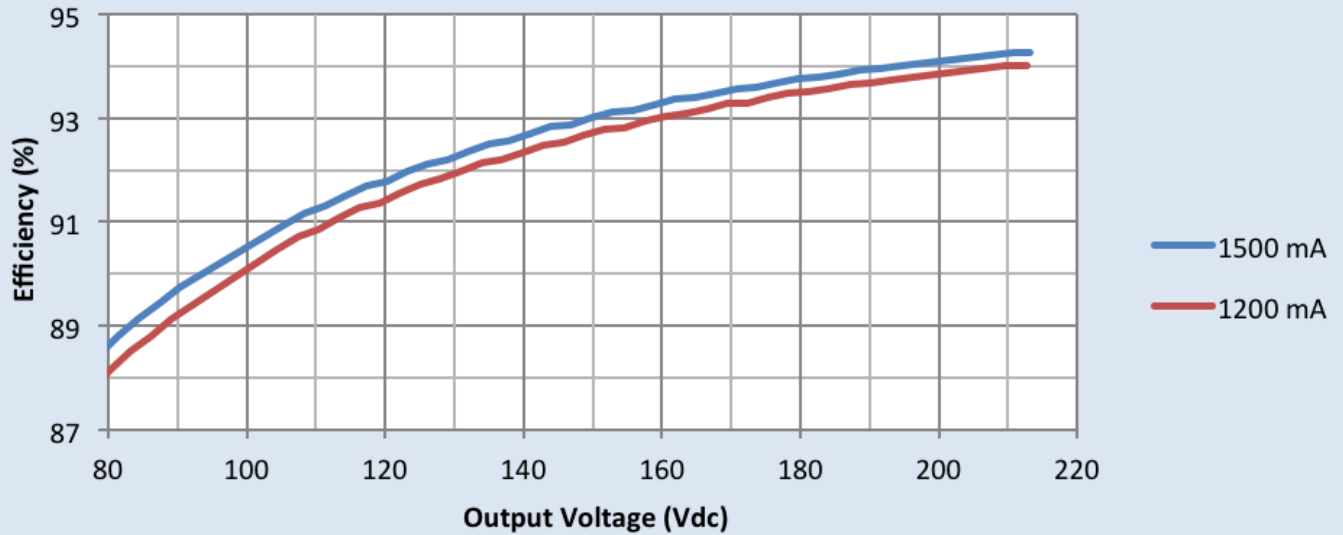

277V Efficiency vs. Vout at 70°C

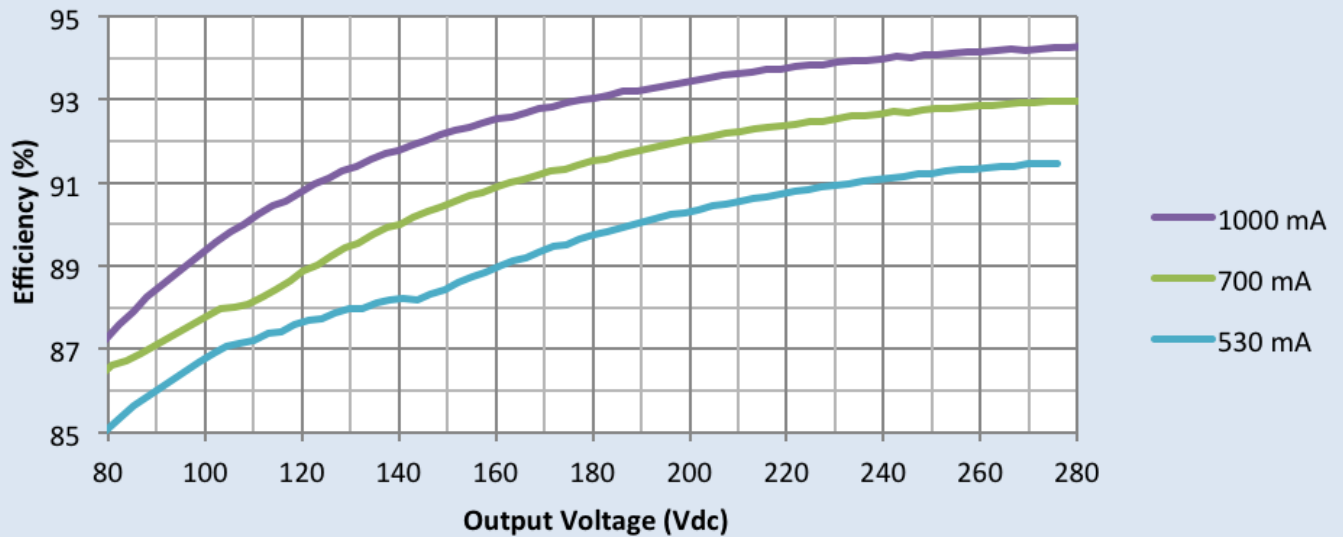


Xitanium 929000712703

300W 120-277V 0.10-1.50A Programmable


Electrical Specifications

All the specifications are typical and at 25°C Tcase unless specified otherwise.

Output Current vs. Driver Case Temperature

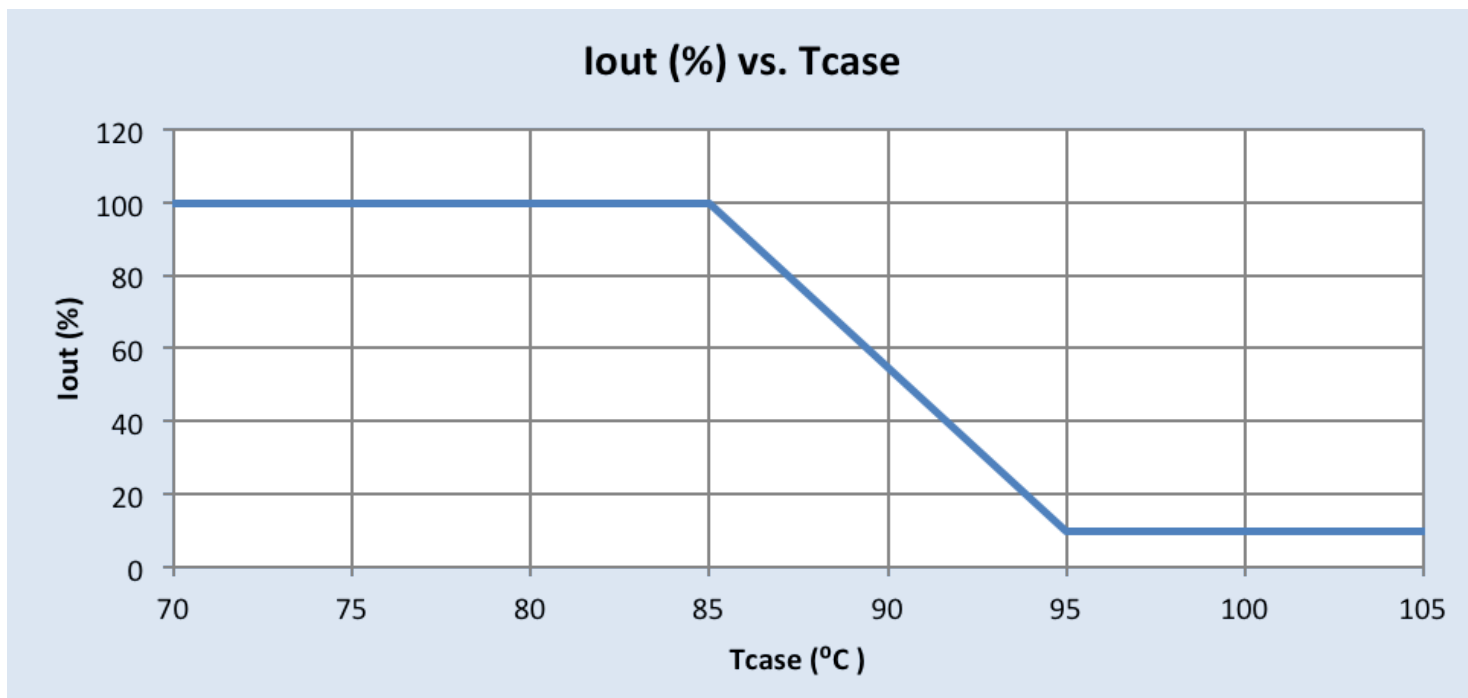

Driver Lifetime Vs. Driver Case Temperature

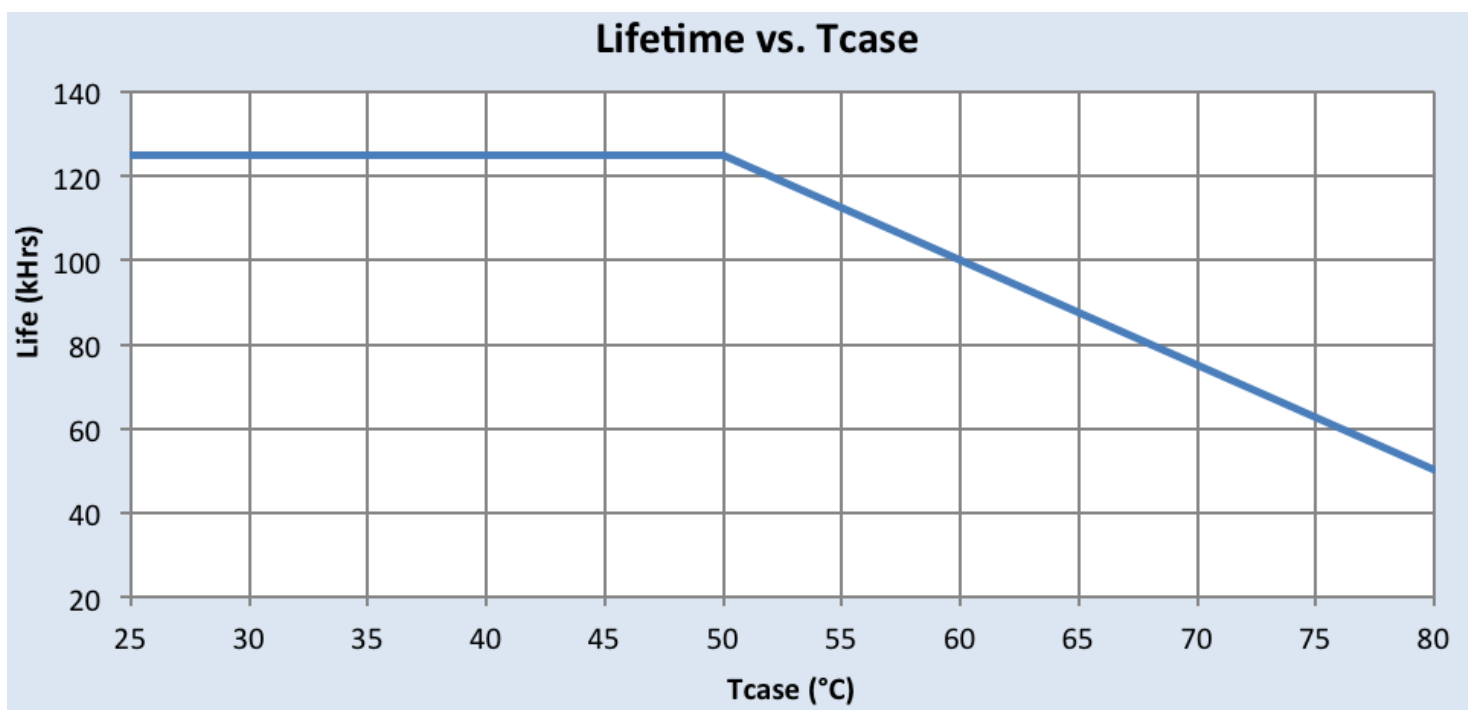


Xitanium 929000712703

300W 120-277V 0.10-1.50A Programmable


Performance Characteristics

Based on measurements on a typical sample. The accuracy of the measurements is within the tolerance of the measurement instruments. The graphs are meant to be a guideline and not a specification.

Power Factor vs. Output Power @Tc=70°C

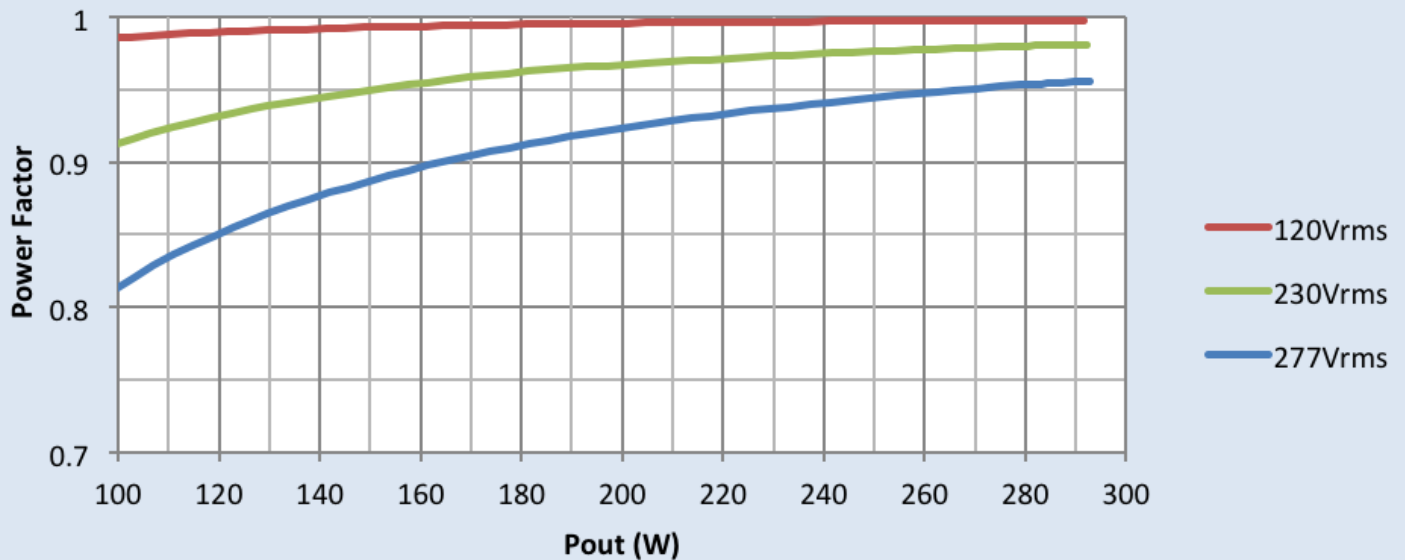


THD vs. Output Power @Tc=70°C

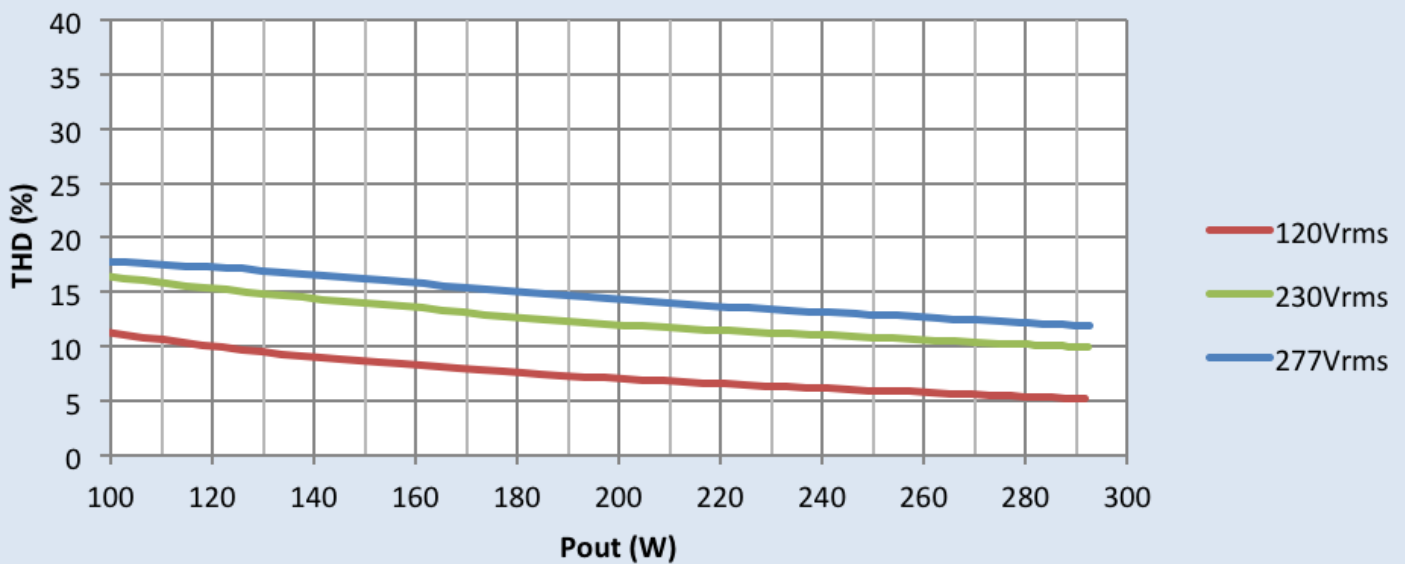

Xitanium 929000712703

300W 120-277V 0.10-1.50A Programmable

Inrush Current Info

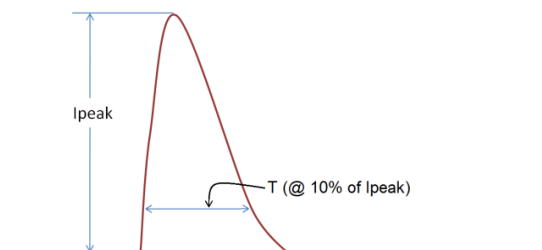

| Vin | I _{peak} | T (@ 10% of I _{peak}) |
|----------|-------------------|---------------------------------|
| 120 Vrms | 77A | 440μs |
| 230 Vrms | 138A | 520μs |
| 277 Vrms | 166A | 530μs |

Inrush current is measured at peak of the corresponding line voltage, source impedance per NEMA 410.

Lightning Surge Info

| ANSI Surge Type | Differential Mode (L-N) | Common Mode (L-G, N-G, L&N-G) |
|---|-------------------------|-------------------------------|
| 1.2/50μs Combination Wave (w/t 2 ₂) | 4kV | 4kV |

Programming Tool

MultiOne

For latest version please check www.philips.com/multione

CE Isolation

Basic Isolation: 2U+1000V

Double Isolation: 4U+2750V

| Isolation | Input Wires | Output Wires | DALI Wires | 0-10V Wires | Chassis |
|--------------|-------------|--------------|------------|-------------|---------|
| Input Wires | NA | Basic | Basic | Basic | Double |
| Output Wires | Basic | NA | Basic | Basic | Basic |
| DALI Wires | Basic | Basic | NA | NA | Double |
| 0-10V Wires | Basic | Basic | NA | NA | Double |
| Chassis | Double | Basic | Double | Double | NA |

UL Isolation

| Isolation | Input Wires | Output Wires | DALI Wires (Class 1&2) | 0-10V Wires (Class 1&2) | Chassis |
|-------------------------|-------------|--------------|------------------------|-------------------------|---------|
| Input Wires | NA | 2xU+1kV | 2.5kVac | 2.5kVac | 2xU+1kV |
| Output Wires | 2xU+1kV | NA | 2.5kVac | 2.5kVac | 2xU+1kV |
| DALI Wires (Class 1&2) | 2.5kVac | 2.5kVac | NA | NA | 2.5kVac |
| 0-10V Wires (Class 1&2) | 2.5kVac | 2.5kVac | NA | NA | 2.5kVac |
| Chassis | 2xU+1kV | 2xU+1kV | 2.5kVac | 2.5kVac | NA |

U = Max input voltage

UL Conditions of Acceptability

Please contact your representative for a copy of the latest UL Conditions of Acceptability (COA).

The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.



© 2022 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Signify North America Corporation
400 Crossing Blvd, Suite 600
Bridgewater, NJ 08807
Telephone: 855-486-2216

Signify Canada Ltd.
281 Hillmount Road,
Markham, ON, Canada L6C 2S3
Telephone: 800-668-9008

All trademarks are owned by Signify Holding or their respective owners.