


## Small Signal Zener Diodes

### Features

- Silicon planar power zener diodes
- These diodes are also available in other case styles and other configurations including: the SOT-23 case with type designation BZX84 series, the dual zener diode common anode configuration in the SOT-23 case with type designation AZ23 series and the dual zener diode common cathode configuration in the SOT-23 case with type designation DZ23 series.
- The zener voltages are graded according to the international E 24 standard.
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC



**RoHS**  
COMPLIANT  
**GREEN**  
(5-2008)\*\*

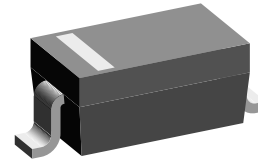

17431

### Mechanical Data

**Case:** SOD-123

**Weight:** approx. 9.4 mg

**Packaging codes/options:**

18/10 k per 13 " reel (8 mm tape), 10 k/box

08/3 k per 7 " reel (8 mm tape), 15 k/box

### Absolute Maximum Ratings

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Zener current see table " Characteristics "				
Power dissipation		$P_{tot}$	500 <sup>2)</sup>	mW
Power dissipation		$P_{tot}$	410 <sup>1)</sup>	mW

<sup>1)</sup> Diode on ceramic substrate 0.7 mm; 2.5 mm<sup>2</sup> pad areas

<sup>2)</sup> Diode on ceramic substrate 0.7 mm; 5 mm<sup>2</sup> pad areas

### Thermal Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Thermal resistance junction to ambient air		$R_{thJA}$	300 <sup>1)</sup>	$^{\circ}\text{C}/\text{W}$
Junction temperature		$T_J$	150	$^{\circ}\text{C}$
Storage temperature range		$T_S$	- 65 to + 150	$^{\circ}\text{C}$

<sup>1)</sup> Valid provided that electrodes are kept at ambient temperature

\*\* Please see document "Vishay Material Category Policy": [www.vishay.com/doc?99902](http://www.vishay.com/doc?99902)

### Electrical Characteristics

Part number	Marking code	Zener voltage range <sup>1)</sup>		Dynamic resistance		Test current	Temp. coefficient	Reverse voltage	Admissible Zener current <sup>4)</sup>	
		$V_Z$ at $I_{ZT1}$		$r_{zj}$ at $I_{ZT1}$	$r_{zj}$ at $I_{ZT2}$	$I_{ZT1}$	at $I_{ZT1}$	$V_R$ at $I_R = 100$ nA	$I_Z$ at $T_{amb} = 45$ °C	$I_Z$ at $T_{amb} = 25$ °C
		V		Ω		mA	$\alpha_{VZ}$ ( $10^{-4}/^{\circ}C$ )	V	mA	
		min.	max.							
BZT52C2V4-V-G	Y1	2.2	2.6	85	600	5	- 9 to - 4	-	-	-
BZT52C2V7-V-G	Y2	2.5	2.9	75 (< 83)	< 500	5	- 9 to - 4	-	113	134
BZT52C3V0-V-G	Y3	2.8	3.2	80 (< 95)	< 500	5	- 9 to - 3	-	98	118
BZT52C3V3-V-G	Y4	3.1	3.5	80 (< 95)	< 500	5	- 8 to - 3	-	92	109
BZT52C3V6-V-G	Y5	3.4	3.8	80 (< 95)	< 500	5	- 8 to - 3	-	85	100
BZT52C3V9-V-G	Y6	3.7	4.1	80 (< 95)	< 500	5	- 7 to - 3	-	77	92
BZT52C4V3-V-G	Y7	4	4.6	80 (< 95)	< 500	5	- 6 to - 1	-	71	84
BZT52C4V7-V-G	Y8	4.4	5	70 (< 78)	< 500	5	- 5 to + 2	-	64	76
BZT52C5V1-V-G	Y9	4.8	5.4	30 (< 60)	< 480	5	- 3 to + 4	> 0.8	56	67
BZT52C5V6-V-G	YA	5.2	6	10 (< 40)	< 400	5	- 2 to + 6	> 1	50	59
BZT52C6V2-V-G	YB	5.8	6.6	4.8 (< 10)	< 200	5	- 1 to + 7	> 2	45	54
BZT52C6V8-V-G	YC	6.4	7.2	4.5 (< 8)	< 150	5	+ 2 to + 7	> 3	41	49
BZT52C7V5-V-G	YD	7	7.9	4 (< 7)	< 50	5	+ 3 to + 7	> 5	37	44
BZT52C8V2-V-G	YE	7.7	8.7	4.5 (< 7)	< 50	5	+ 4 to + 7	> 6	34	40
BZT52C9V1-V-G	YF	8.5	9.6	4.8 (< 10)	< 50	5	+ 5 to + 8	> 7	30	36
BZT52C10-V-G	YG	9.4	10.6	5.2 (< 15)	< 70	5	+ 5 to + 8	> 7.5	28	33
BZT52C11-V-G	YH	10.4	11.6	6 (< 20)	< 70	5	+ 5 to + 9	> 8.5	25	30
BZT52C12-V-G	YI	11.4	12.7	7 (< 20)	< 90	5	+ 6 to + 9	> 9	23	28
BZT52C13-V-G	YK	12.4	14.1	9 (< 25)	< 110	5	+ 7 to + 9	> 10	21	25
BZT52C15-V-G	YL	13.8	15.6	11 (< 30)	< 110	5	+ 7 to + 9	> 11	19	23
BZT52C16-V-G	YM	15.3	17.1	13 (< 40)	< 170	5	+ 8 to + 9.5	> 12	17	20
BZT52C18-V-G	YN	16.8	19.1	18 (< 50)	< 170	5	+ 8 to + 9.5	> 14	15	18
BZT52C20-V-G	YO	18.8	21.2	20 (< 50)	< 220	5	+ 8 to + 10	> 15	14	17
BZT52C22-V-G	YP	20.8	23.3	25 (< 55)	< 220	5	+ 8 to + 10	> 17	13	16
BZT52C24-V-G	YR	22.8	25.6	28 (< 80)	< 220	5	+ 8 to + 10	> 18	11	13
BZT52C27-V-G	YS	25.1	28.9	30 (< 80)	< 250	5	+ 8 to + 10	> 20	10	12
BZT52C30-V-G	YT	28	32	35 (< 80)	< 250	5	+ 8 to + 10	> 22.5	9	10
BZT52C33-V-G	YU	31	35	40 (< 80)	< 250	5	+ 8 to + 10	> 25	8	9
BZT52C36-V-G	YW	34	38	40 (< 90)	< 250	5	+ 8 to + 10	> 27	8	9
BZT52C39-V-G	YX	37	41	50 (< 90)	< 300	5	+ 10 to + 12	> 29	7	8
BZT52C43-V-G	YY	40	46	60 (< 100)	< 700	5	+ 10 to + 12	> 32	6	7
BZT52C47-V-G	YZ	44	50	70 (< 100)	< 750	5	+ 10 to + 12	> 35	5	6
BZT52C51-V-G	Z1	48	54	70 (< 100)	< 750	5	+ 10 to + 12	> 38	5	6
BZT52C56-V-G	Z2	52	60	< 135 <sup>2)</sup>	< 1000 <sup>3)</sup>	2.5	typ. + 10 <sup>2)</sup>	-	-	-
BZT52C62-V-G	Z3	58	66	< 150 <sup>2)</sup>	< 1000 <sup>3)</sup>	2.5	typ. + 10 <sup>2)</sup>	-	-	-
BZT52C68-V-G	Z4	64	72	< 200 <sup>2)</sup>	< 1000 <sup>3)</sup>	2.5	typ. + 10 <sup>2)</sup>	-	-	-
BZT52C75-V-G	Z5	70	79	< 250 <sup>2)</sup>	< 1500 <sup>3)</sup>	2.5	typ. + 10 <sup>2)</sup>	-	-	-

$I_{ZT1} = 5$  mA,  $I_{ZT2} = 1$  mA

1) Measured with pulses  $T_p = 5$  ms

2) =  $I_{ZT1} = 2.5$  mA

3) =  $I_{ZT2} = 0.5$  mA

4) Valid provided that electrodes are kept at ambient temperature



## Electrical Characteristics

Part number	Marking code	Zener voltage range <sup>1)</sup>		Dynamic resistance		Test current	Temp. coefficient	Reverse voltage	Admissible Zener current <sup>4)</sup>	
		$V_Z$ at $I_{ZT1}$		$r_{zj}$ at $I_{ZT1}$	$r_{zj}$ at $I_{ZT2}$	$I_{ZT1}$	at $I_{ZT1}$	$V_R$ at $I_R = 100$ nA	$I_Z$ at $T_{amb} = 45$ °C	$I_Z$ at $T_{amb} = 25$ °C
		V		Ω		mA	$\alpha_{VZ}$ ( $10^{-4}/^{\circ}C$ )	V	mA	
		min.	max.							
BZT52B2V4-V-G	V1	2.35	2.45	85	600	5	- 9 to - 4	-	-	-
BZT52B2V7-V-G	V2	2.65	2.75	75 (< 83)	< 500	5	- 9 to - 4	-	113	134
BZT52B3V0-V-G	V3	2.94	3.06	80 (< 95)	< 500	5	- 9 to - 3	-	98	118
BZT52B3V3-V-G	V4	3.23	3.37	80 (< 95)	< 500	5	- 8 to - 3	-	92	109
BZT52B3V6-V-G	V5	3.53	3.67	80 (< 95)	< 500	5	- 8 to - 3	-	85	100
BZT52B3V9-V-G	V6	3.82	3.98	80 (< 95)	< 500	5	- 7 to - 3	-	77	92
BZT52B4V3-V-G	V7	4.21	4.39	80 (< 95)	< 500	5	- 6 to - 1	-	71	84
BZT52B4V7-V-G	V8	4.61	4.79	70 (< 78)	< 500	5	- 5 to + 2	-	64	76
BZT52B5V1-V-G	V9	5	5.2	30 (< 60)	< 480	5	- 3 to + 4	> 0.8	56	67
BZT52B5V6-V-G	VA	5.49	5.71	10 (< 40)	< 400	5	- 2 to + 6	> 1	50	59
BZT52B6V2-V-G	VB	6.08	6.32	4.8 (< 10)	< 200	5	- 1 to + 7	> 2	45	54
BZT52B6V8-V-G	VC	6.66	6.94	4.5 (< 8)	< 150	5	+ 2 to + 7	> 3	41	49
BZT52B7V5-V-G	VD	7.35	7.65	4 (< 7)	< 50	5	+ 3 to + 7	> 5	37	44
BZT52B8V2-V-G	VE	8.04	8.36	4.5 (< 7)	< 50	5	+ 4 to + 7	> 6	34	40
BZT52B9V1-V-G	VF	8.92	9.28	4.8 (< 10)	< 50	5	+ 5 to + 8	> 7	30	36
BZT52B10-V-G	VG	9.8	10.2	5.2 (< 15)	< 70	5	+ 5 to + 8	> 7.5	28	33
BZT52B11-V-G	VH	10.8	11.2	6 (< 20)	< 70	5	+ 5 to + 9	> 8.5	25	30
BZT52B12-V-G	VI	11.8	12.2	7 (< 20)	< 90	5	+ 6 to + 9	> 9	23	28
BZT52B13-V-G	VK	12.7	13.3	9 (< 25)	< 110	5	+ 7 to + 9	> 10	21	25
BZT52B15-V-G	VL	14.7	15.3	11 (< 30)	< 110	5	+ 7 to + 9	> 11	19	23
BZT52B16-V-G	VM	15.7	16.3	13 (< 40)	< 170	5	+ 8 to + 9.5	> 12	17	20
BZT52B18-V-G	VN	17.6	18.4	18 (< 50)	< 170	5	+ 8 to + 9.5	> 14	15	18
BZT52B20-V-G	VO	19.6	20.4	20 (< 50)	< 220	5	+ 8 to + 10	> 15	14	17
BZT52B22-V-G	VP	21.6	22.4	25 (< 55)	< 220	5	+ 8 to + 10	> 17	13	16
BZT52B24-V-G	VR	23.5	24.5	28 (< 80)	< 220	5	+ 8 to + 10	> 18	11	13
BZT52B27-V-G	VS	26.5	27.5	30 (< 80)	< 250	5	+ 8 to + 10	> 20	10	12
BZT52B30-V-G	VT	29.4	30.6	35 (< 80)	< 250	5	+ 8 to + 10	> 22.5	9	10
BZT52B33-V-G	VU	32.3	33.7	40 (< 80)	< 250	5	+ 8 to + 10	> 25	8	9
BZT52B36-V-G	VW	35.3	36.7	40 (< 90)	< 250	5	+ 8 to + 10	> 27	8	9
BZT52B39-V-G	VX	38.2	39.8	50 (< 90)	< 300	5	+ 10 to + 12	> 29	7	8
BZT52B43-V-G	VY	42.1	43.9	60 (< 100)	< 700	5	+ 10 to + 12	> 32	6	7
BZT52B47-V-G	VZ	46.1	47.9	70 (< 100)	< 750	5	+ 10 to + 12	> 35	5	6
BZT52B51-V-G	U1	50	52	70 (< 100)	< 750	5	+ 10 to + 12	> 38	5	6
BZT52B56-V-G	U2	54.9	57.1	< 135 <sup>2)</sup>	< 1000 <sup>3)</sup>	2.5	typ. + 10 <sup>2)</sup>	-	-	-
BZT52B62-V-G	U3	60.8	63.2	< 150 <sup>2)</sup>	< 1000 <sup>3)</sup>	2.5	typ. + 10 <sup>2)</sup>	-	-	-
BZT52B68-V-G	U4	66.6	69.4	< 200 <sup>2)</sup>	< 1000 <sup>3)</sup>	2.5	typ. + 10 <sup>2)</sup>	-	-	-
BZT52B75-V-G	U5	73.5	76.5	< 250 <sup>2)</sup>	< 1500 <sup>3)</sup>	2.5	typ. + 10 <sup>2)</sup>	-	-	-

$I_{ZT1} = 5$  mA,  $I_{ZT2} = 1$  mA

<sup>1)</sup> Measured with pulses  $T_p = 5$  ms

<sup>2)</sup> =  $I_{ZT1} = 2.5$  mA

<sup>3)</sup> =  $I_{ZT2} = 0.5$  mA

<sup>4)</sup> Valid provided that electrodes are kept at ambient temperature

Typical Characteristics ( $T_{amb} = 25\text{ }^{\circ}\text{C}$  unless otherwise specified)

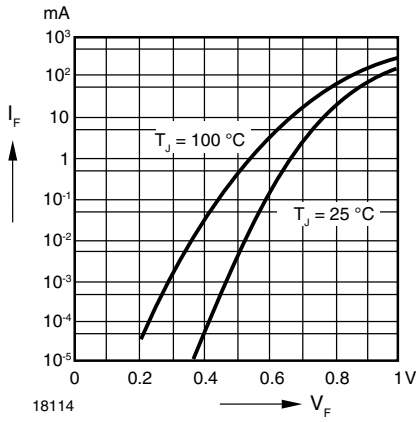


Figure 1. Forward Characteristics

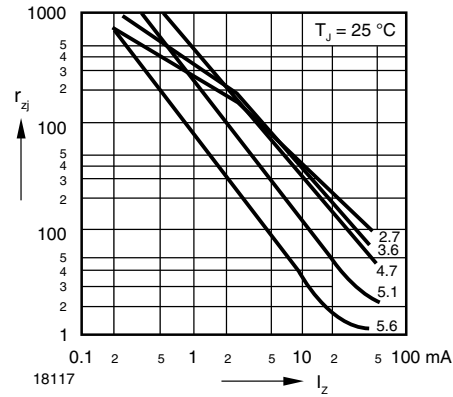


Figure 4. Dynamic Resistance vs. Zener Current

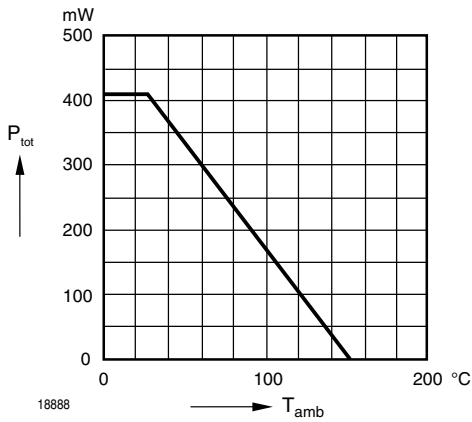


Figure 2. Admissible Power Dissipation vs. Ambient Temperature

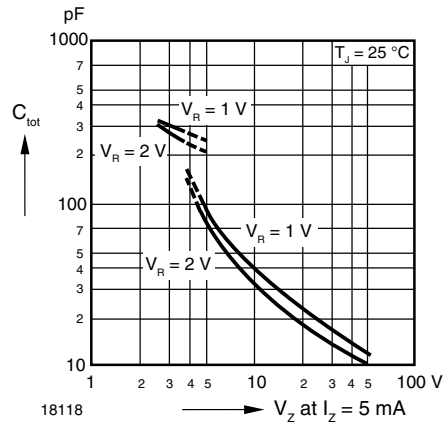


Figure 5. Capacitance vs. Zener Voltage

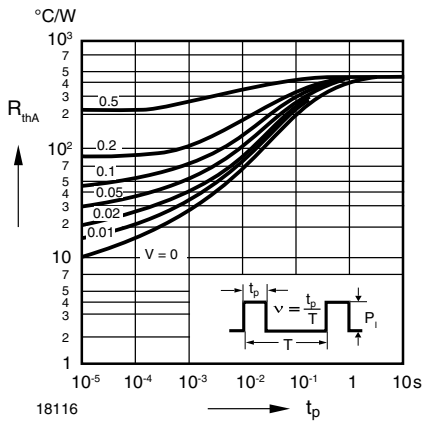


Figure 3. Pulse Thermal Resistance vs. Pulse Duration

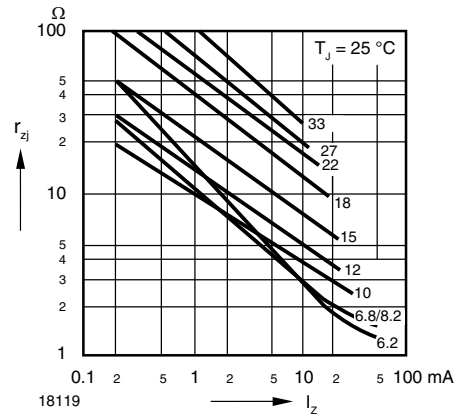


Figure 6. Dynamic Resistance vs. Zener Current

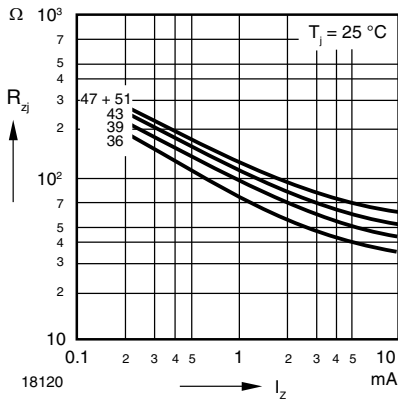


Figure 7. Dynamic Resistance vs. Zener Current

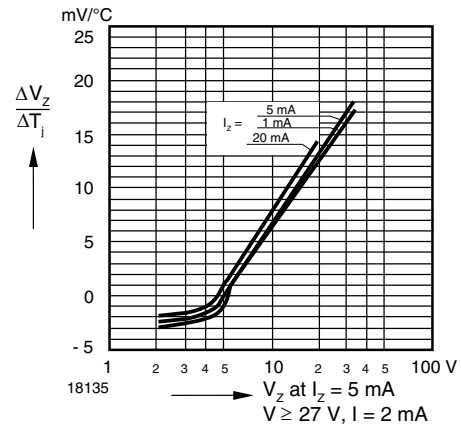


Figure 10. Temperature Dependence of Zener Voltage vs. Zener Voltage

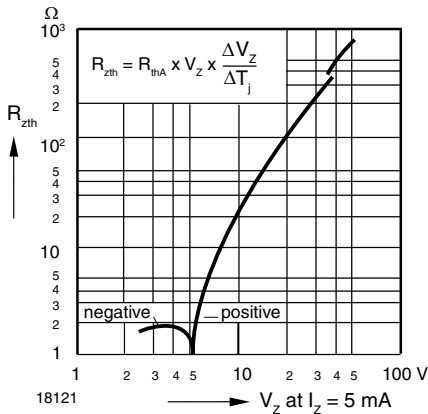


Figure 8. Thermal Differential Resistance vs. Zener Voltage

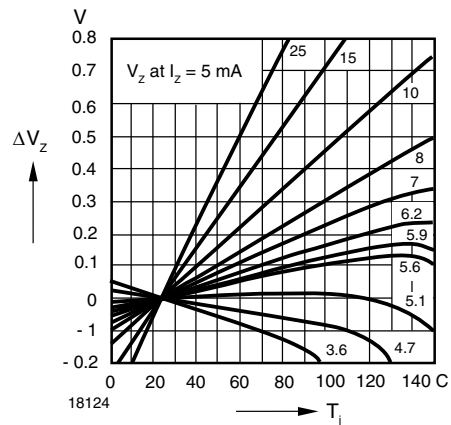


Figure 11. Change of Zener Voltage vs. Junction Temperature

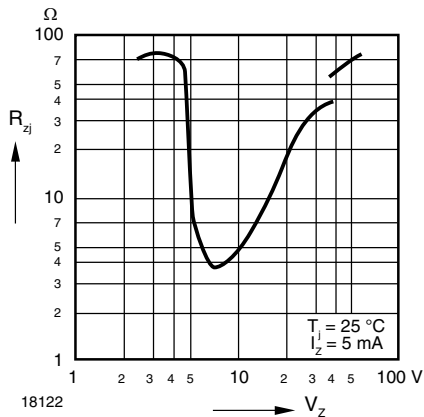


Figure 9. Dynamic Resistance vs. Zener Voltage

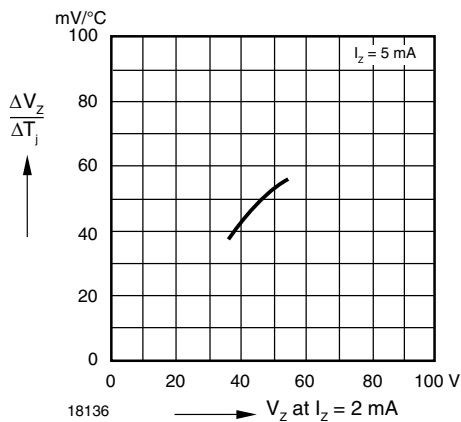


Figure 12. Temperature Dependence of Zener Voltage vs. Zener Voltage

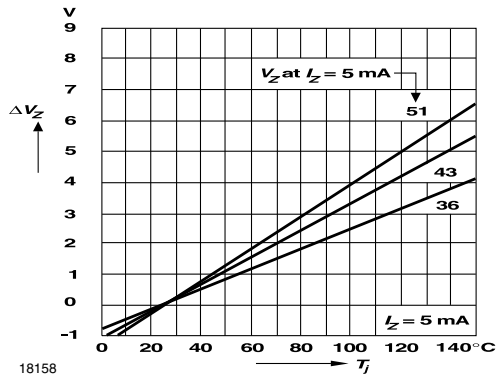


Figure 13. Change of Zener Voltage vs. Junction Temperature

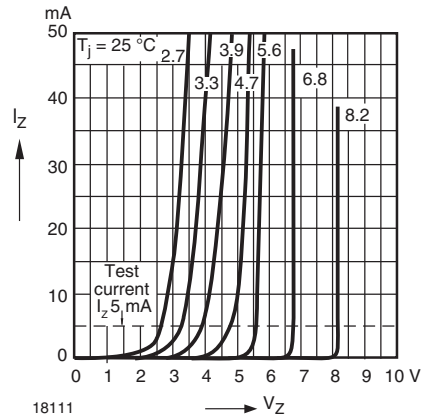


Figure 16. Breakdown Characteristics

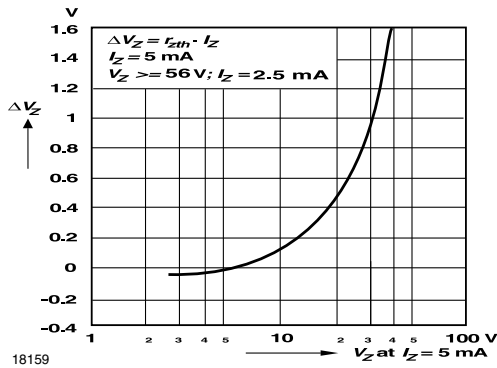


Figure 14. Change of Zener Voltage from Turn-on up to the Point of Thermal Equilibrium vs. Zener Voltage

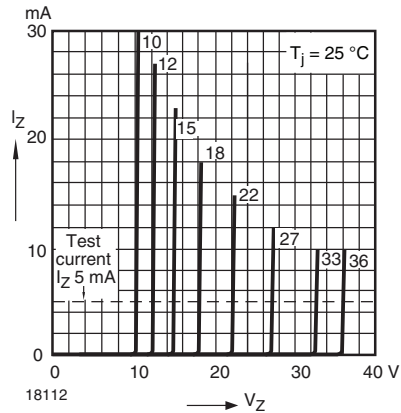


Figure 17. Breakdown Characteristics


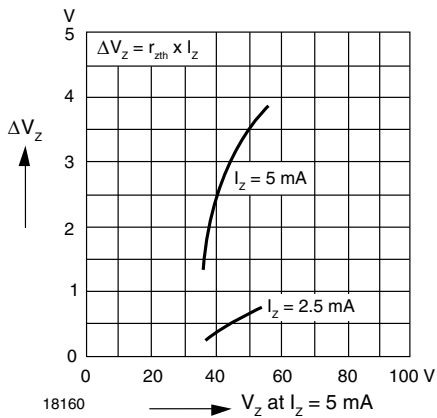



Figure 15. Change of Zener Voltage from Turn-on up to the Point of Thermal Equilibrium vs. Zener Voltage

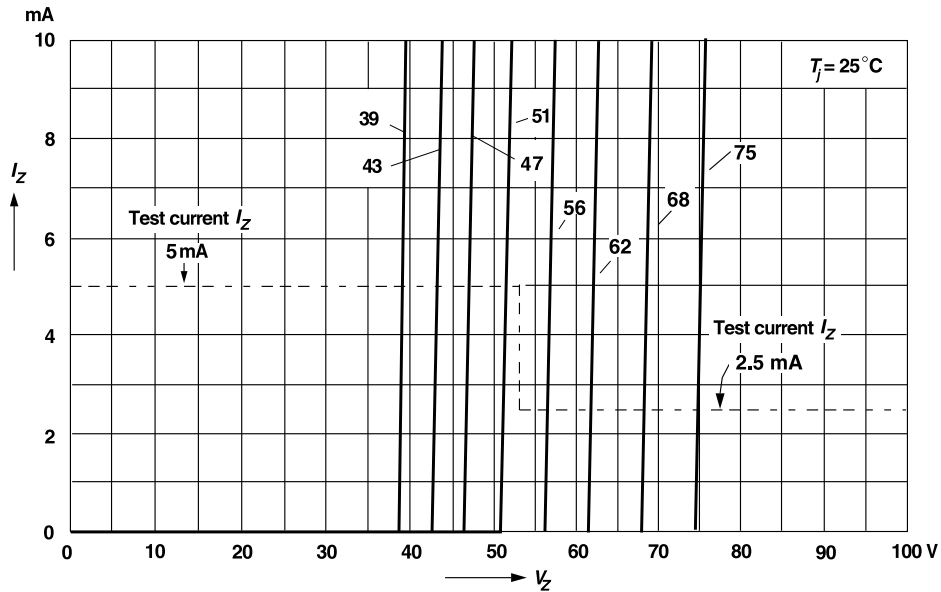

18157

Figure 18. Breakdown Characteristics

## Package Dimensions in millimeters (inches): SOD-123

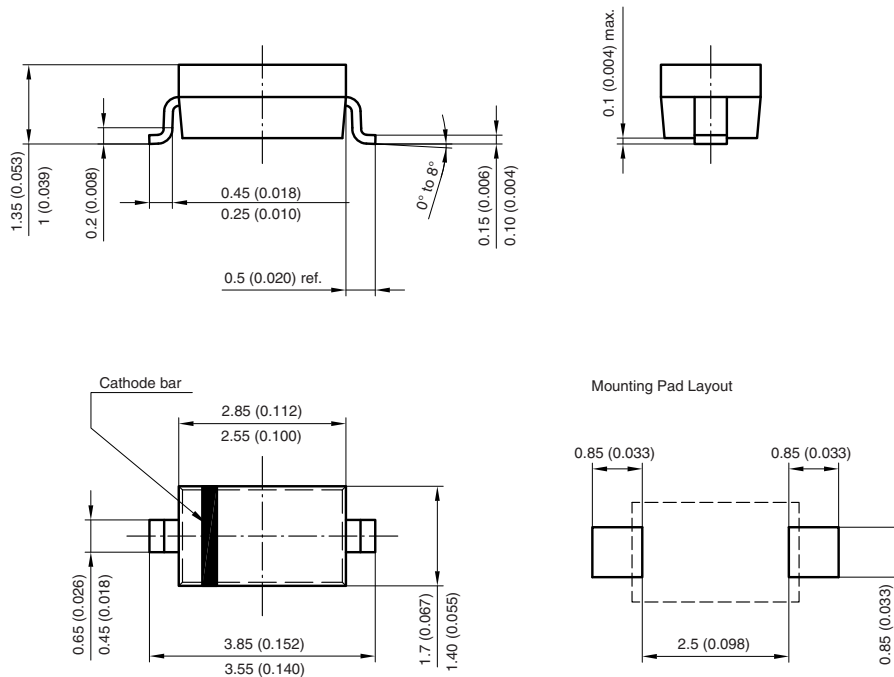

Rev. 4 - Date: 24. Sep. 2009  
 Document no.: S8-V-3910.01-001 (4)  
 17432



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.